



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(351064)
Machine Id
122398-1216
Component
Front Right Wheel Hub
Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0281251	LH0202598	---
Sample Date		Client Info		07 Feb 2024	20 Oct 2021	---
Machine Age	hrs	Client Info		5387	584	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>745	53	34	---
Chromium	ppm	ASTM D5185(m)	>4	<1	<1	---
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	---
Titanium	ppm	ASTM D5185(m)	>4	0	0	---
Silver	ppm	ASTM D5185(m)	>2	0	<1	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	2	---
Lead	ppm	ASTM D5185(m)	>4	<1	<1	---
Copper	ppm	ASTM D5185(m)	>130	3	10	---
Tin	ppm	ASTM D5185(m)	>3	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	LIGHT	LIGHT	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>160	6	12	---
Potassium	ppm	ASTM D5185(m)	>20	<1	2	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	VLITE	VLITE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	6	---
Boron	ppm	ASTM D5185(m)	328	71	19	---
Barium	ppm	ASTM D5185(m)	1	0	<1	---
Molybdenum	ppm	ASTM D5185(m)		0	2	---
Manganese	ppm	ASTM D5185(m)		<1	1	---
Magnesium	ppm	ASTM D5185(m)	1	2	3	---
Calcium	ppm	ASTM D5185(m)	7	19	172	---
Phosphorus	ppm	ASTM D5185(m)	1145	2012	2019	---
Zinc	ppm	ASTM D5185(m)	3	9	51	---
Sulfur	ppm	ASTM D5185(m)	17909	24179	22547	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	149	144	---

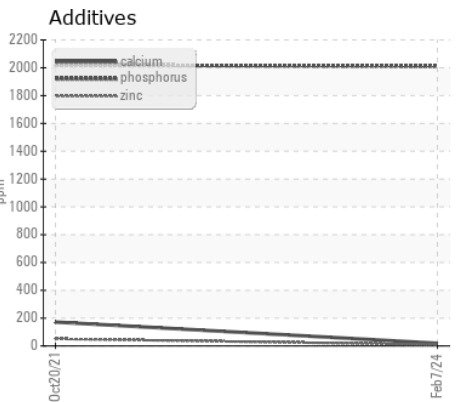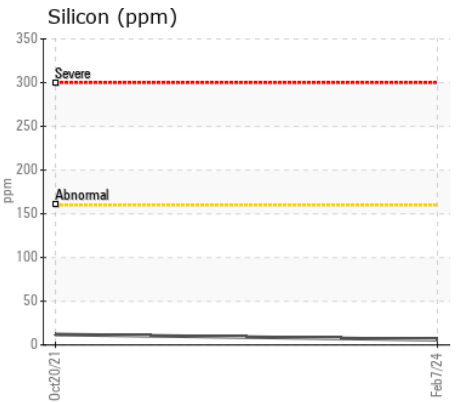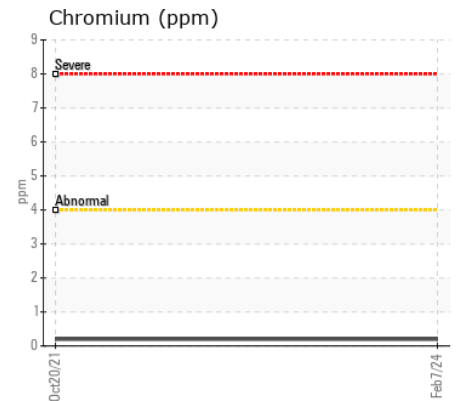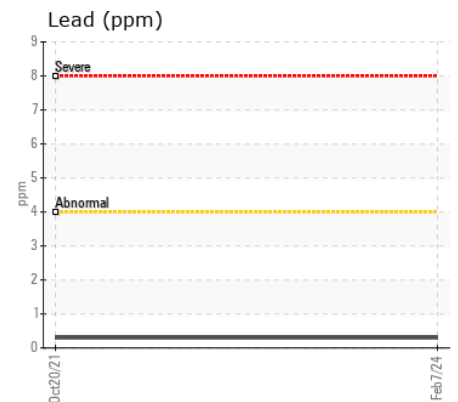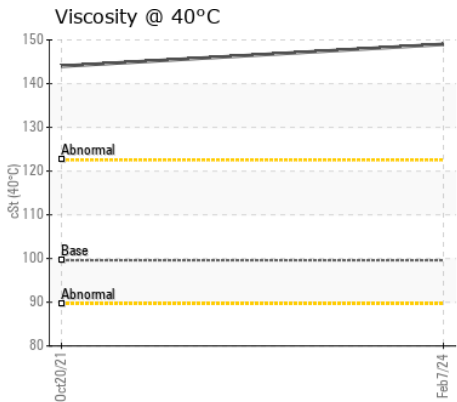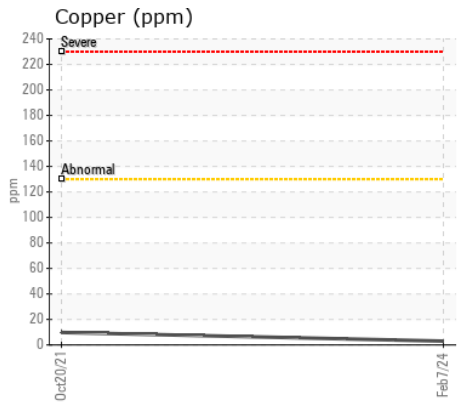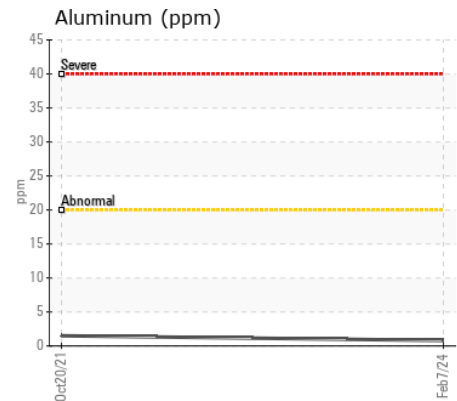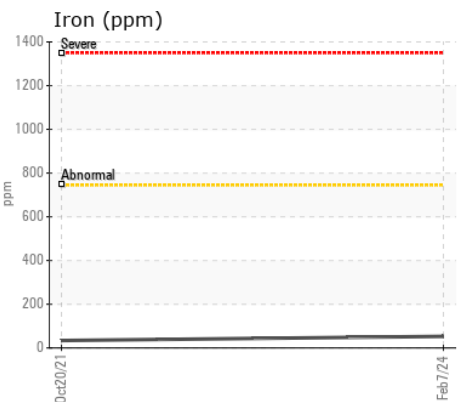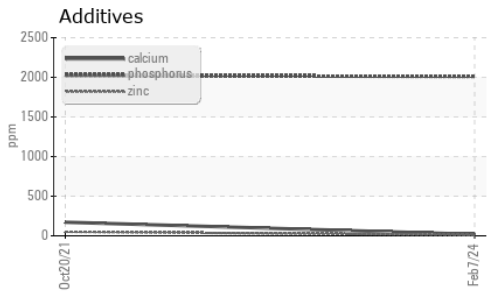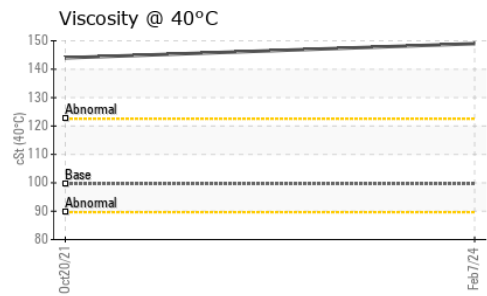

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0281251
Lab Number : 02619358
Unique Number : 5736468
Test Package : MOB 1
Received : 01 Mar 2024
Tested : 01 Mar 2024
Diagnosed : 01 Mar 2024 - Wes Davis

American Iron and Metal
 75 Steel City Court
 Hamilton, ON
 CA L8H 3Y2
 Contact: Heavy Equipment
 hamiltonmobileassetmaintenance@aim-recycling.com
 T: (905)547-5533
 F: (905)544-5671

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.