



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
STBD GEARBOX
Component
Starboard Gearbox
Fluid
Mobilgear 629 (850 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please contact your representative for information regarding the proper sampling kits for your service. NOTE: We recommend using MAR 2 test kits, this testkit includes AN to determine the suitability of the oil for continued use.

WEAR

All component wear rates are normal.





CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service (unconfirmed).

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0803027	WC0803087	WC0803075
Sample Date		Client Info		25 Feb 2024	04 Feb 2024	31 Dec 2023
Machine Age	hrs	Client Info		44631	0	43766
Oil Age	hrs	Client Info		0	0	100
Filter Age	hrs	Client Info		0	0	100
Oil Changed		Client Info		Not Changed	N/A	Not Changed
Filter Changed		Client Info		Not Changed	N/A	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL
<hr/>						
Iron	ppm	ASTM D5185(m)	>150	<1	<1	<1
Chromium	ppm	ASTM D5185(m)	>10	0	0	0
Nickel	ppm	ASTM D5185(m)	>10	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	<1
Aluminum	ppm	ASTM D5185(m)	>5	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>65	<1	0	0
Copper	ppm	ASTM D5185(m)	>80	2	1	<1
Tin	ppm	ASTM D5185(m)	>8	<1	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
<hr/>						
Silicon	ppm	ASTM D5185(m)	>20	<1	4	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG
<hr/>						
Sodium	ppm	ASTM D5185(m)		0	0	0
Boron	ppm	ASTM D5185(m)		26	27	28
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	<1	<1
Calcium	ppm	ASTM D5185(m)		4	3	3
Phosphorus	ppm	ASTM D5185(m)		339	343	328
Zinc	ppm	ASTM D5185(m)		3	2	2
Sulfur	ppm	ASTM D5185(m)		12436	12450	12204
Visc @ 40°C	cSt	ASTM D7279(m)	150	151	151	151

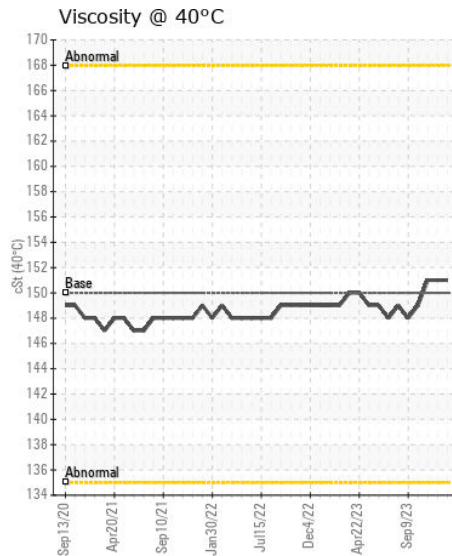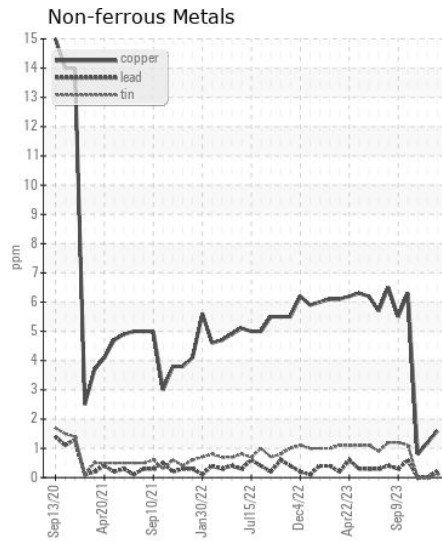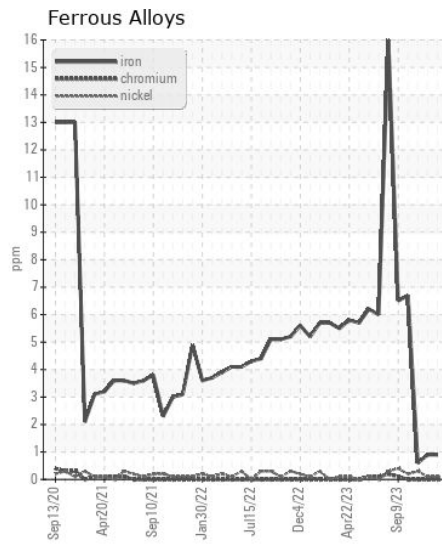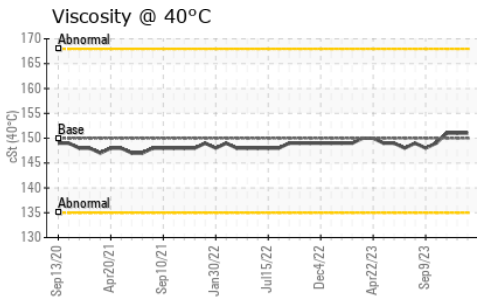

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0803027
Lab Number : 02619390
Unique Number : 5736500
Test Package : MAR 1
Received : 01 Mar 2024
Tested : 01 Mar 2024
Diagnosed : 01 Mar 2024 - Wes Davis

Siem Offshore Canada LP.
 M/V Avalon Sea, 140 WATER STREET SUITE 1000
 ST. JOHN'S, NL
 CA A1C 6H6
 Contact: Avalon Sea
 ecr@avalonsea.siemoffshore.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: