



Machine Id
68
Component
Rear Diesel Engine
Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

RECOMMENDATION

The oil change at the time of sampling has been noted. Resample at the next service interval to monitor. No other corrective action is recommended at this time.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0078173	PC0071681	PC0071711
Sample Date		Client Info		28 Feb 2024	20 Nov 2023	20 Jun 2023
Machine Age	kms	Client Info		73996	86982	60560
Oil Age	kms	Client Info		8000	8000	8000
Filter Age	kms	Client Info		8000	8000	8000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				MARGINAL	NORMAL	MARGINAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>200	18	27	24
Chromium	ppm	ASTM D5185(m)	>20	1	2	2
Nickel	ppm	ASTM D5185(m)	>2	0	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>30	1	1	<1
Lead	ppm	ASTM D5185(m)	>30	4	5	5
Copper	ppm	ASTM D5185(m)	>30	<1	2	1
Tin	ppm	ASTM D5185(m)	>15	2	2	2
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION












Light fuel dilution occurring. No other contaminants were detected in the oil.

Silicon	ppm	ASTM D5185(m)	>30	3	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel	%	ASTM D7593*	>3.0	▲ 2.4	<1.0	▲ 2.4
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	1	1.6	1.5
Nitration	Abs/cm	ASTM D7624*	>20	8.5	8.1	8.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	21.5	21.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	0	8	3	3
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	60	60	58
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	936	963	939
Calcium	ppm	ASTM D5185(m)	1070	1078	1035	1080
Phosphorus	ppm	ASTM D5185(m)	1150	1023	1000	1083
Zinc	ppm	ASTM D5185(m)	1270	1158	1180	1180
Sulfur	ppm	ASTM D5185(m)	2060	2786	2579	2604
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.8	15.1	15.2
Visc @ 40°C	cSt	ASTM D7279(m)	118.2	87.1	93.9	94.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	12.6	13.0	13.2
Viscosity Index (VI)	Scale	ASTM D2270*	139	141	136	138

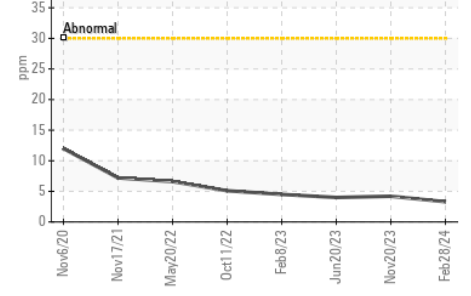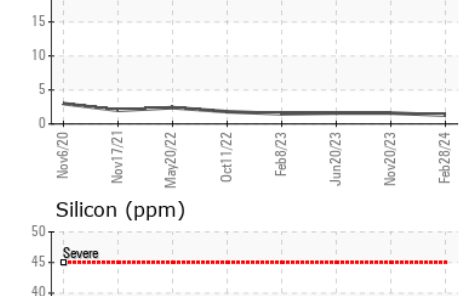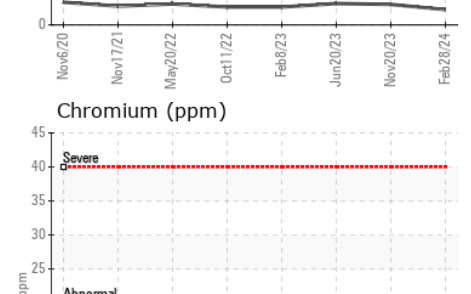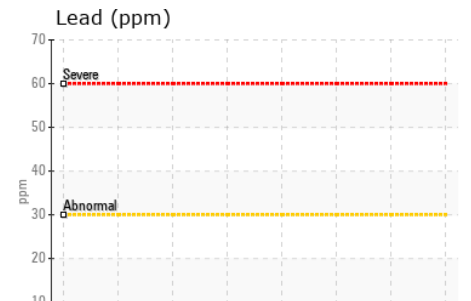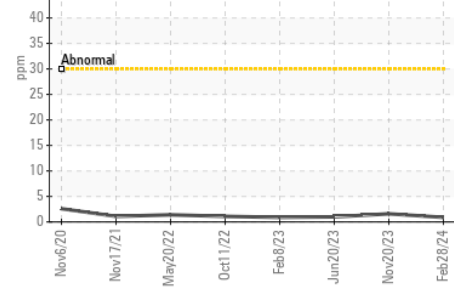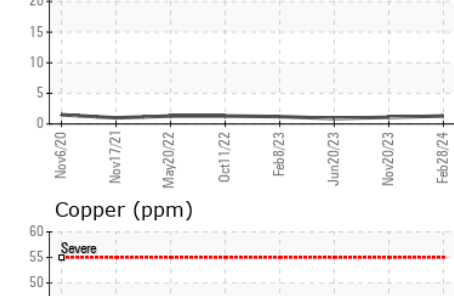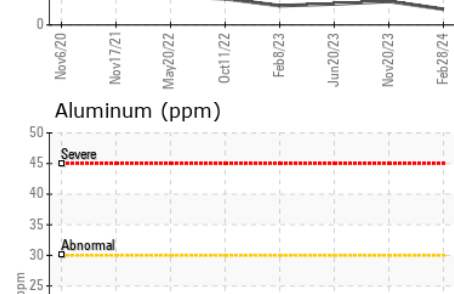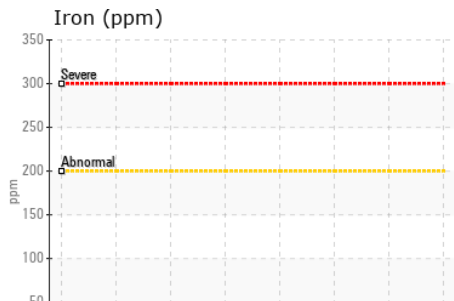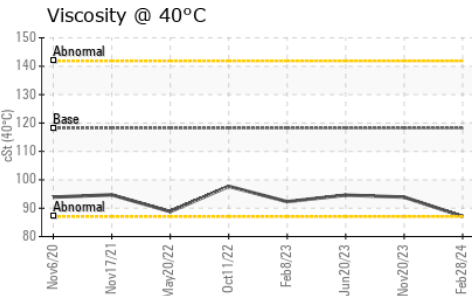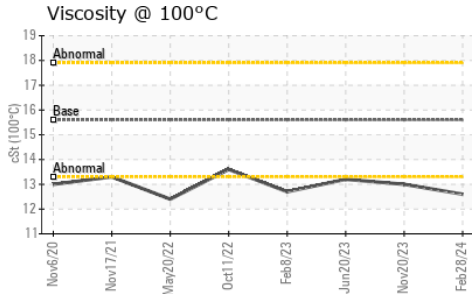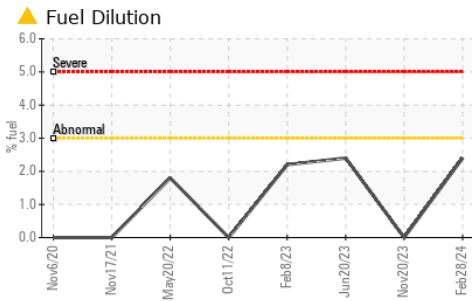

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0078173 **Received** : 04 Mar 2024
Lab Number : 02619476 **Tested** : 05 Mar 2024
Unique Number : 5736586 **Diagnosed** : 05 Mar 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

BEAVER BUS LINES
 339, ACHIBAULD ST
 WINNIPEG, MB
 CA R2J 0W6
 Contact: Roger Roman
 roger@beaverbus.com
 T: (204)989-7033
 F: (204)237-2645

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.