



|                 |               |
|-----------------|---------------|
| WEAR            | <b>NORMAL</b> |
| CONTAMINATION   | <b>NORMAL</b> |
| FLUID CONDITION | <b>NORMAL</b> |



Area  
**GFL216**  
Machine Id  
**401211**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

| Test           | UOM | Method      | Limit/Abn | Current            | History1    | History2    |
|----------------|-----|-------------|-----------|--------------------|-------------|-------------|
| Sample Number  |     | Client Info |           | <b>GFL0111706</b>  | GFL0101405  | GFL0091732  |
| Sample Date    |     | Client Info |           | <b>21 Feb 2024</b> | 06 Dec 2023 | 28 Aug 2023 |
| Machine Age    | kms | Client Info |           | <b>369350</b>      | 361758      | 354495      |
| Oil Age        | kms | Client Info |           | <b>0</b>           | 0           | 0           |
| Filter Age     | kms | Client Info |           | <b>0</b>           | 0           | 0           |
| Oil Changed    |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Filter Changed |     | Client Info |           | <b>Changed</b>     | Changed     | Changed     |
| Sample Status  |     |             |           | <b>NORMAL</b>      | NORMAL      | NORMAL      |

**WEAR**

All component wear rates are normal.

|          |     |               |      |              |    |    |
|----------|-----|---------------|------|--------------|----|----|
| Iron     | ppm | ASTM D5185(m) | >120 | <b>5</b>     | 4  | 4  |
| Chromium | ppm | ASTM D5185(m) | >20  | <b>0</b>     | 0  | 0  |
| Nickel   | ppm | ASTM D5185(m) | >5   | <b>&lt;1</b> | <1 | 0  |
| Titanium | ppm | ASTM D5185(m) | >2   | <b>0</b>     | 0  | 0  |
| Silver   | ppm | ASTM D5185(m) | >2   | <b>0</b>     | 0  | 0  |
| Aluminum | ppm | ASTM D5185(m) | >20  | <b>2</b>     | 1  | 1  |
| Lead     | ppm | ASTM D5185(m) | >40  | <b>1</b>     | <1 | <1 |
| Copper   | ppm | ASTM D5185(m) | >330 | <b>2</b>     | <1 | <1 |
| Tin      | ppm | ASTM D5185(m) | >15  | <b>0</b>     | 0  | 0  |
| Vanadium | ppm | ASTM D5185(m) |      | <b>0</b>     | 0  | 0  |

**CONTAMINATION**










There is no indication of any contamination in the oil.

|                  |          |               |      |                |      |      |
|------------------|----------|---------------|------|----------------|------|------|
| Silicon          | ppm      | ASTM D5185(m) | >25  | <b>2</b>       | 3    | 3    |
| Potassium        | ppm      | ASTM D5185(m) | >20  | <b>2</b>       | <1   | <1   |
| Fuel             |          | WC Method     | >3.0 | <b>&lt;1.0</b> | <1.0 | <1.0 |
| Water            |          | WC Method     | >0.2 | <b>NEG</b>     | NEG  | NEG  |
| Glycol           |          | WC Method     |      | <b>NEG</b>     | NEG  | NEG  |
| Soot %           | %        | ASTM D7844*   | >4   | <b>0.1</b>     | 0.1  | 0    |
| Nitration        | Abs/cm   | ASTM D7624*   | >20  | <b>8.3</b>     | 7.4  | 6.8  |
| Sulfation        | Abs/.1mm | ASTM D7415*   | >30  | <b>18.2</b>    | 17.8 | 18.0 |
| Emulsified Water | scalar   | Visual*       | >0.2 | <b>NEG</b>     | NEG  | NEG  |

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

|              |          |               |      |             |      |      |
|--------------|----------|---------------|------|-------------|------|------|
| Sodium       | ppm      | ASTM D5185(m) |      | <b>17</b>   | 4    | 3    |
| Boron        | ppm      | ASTM D5185(m) | 0    | <b>3</b>    | 5    | 6    |
| Barium       | ppm      | ASTM D5185(m) | 0    | <b>0</b>    | <1   | 0    |
| Molybdenum   | ppm      | ASTM D5185(m) | 60   | <b>57</b>   | 58   | 59   |
| Manganese    | ppm      | ASTM D5185(m) | 0    | <b>0</b>    | 0    | <1   |
| Magnesium    | ppm      | ASTM D5185(m) | 1010 | <b>935</b>  | 941  | 938  |
| Calcium      | ppm      | ASTM D5185(m) | 1070 | <b>1037</b> | 1022 | 1011 |
| Phosphorus   | ppm      | ASTM D5185(m) | 1150 | <b>999</b>  | 987  | 1029 |
| Zinc         | ppm      | ASTM D5185(m) | 1270 | <b>1159</b> | 1148 | 1155 |
| Sulfur       | ppm      | ASTM D5185(m) | 2060 | <b>2696</b> | 2527 | 2540 |
| Oxidation    | Abs/.1mm | ASTM D7414*   | >25  | <b>15.5</b> | 14.4 | 14.2 |
| Visc @ 100°C | cSt      | ASTM D7279(m) | 15.6 | <b>13.7</b> | 13.5 | 13.6 |

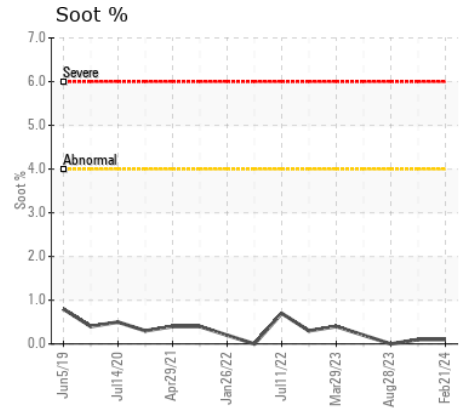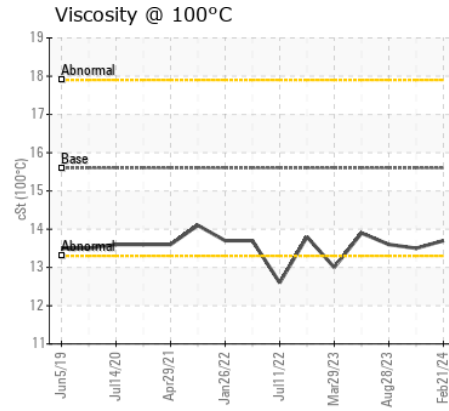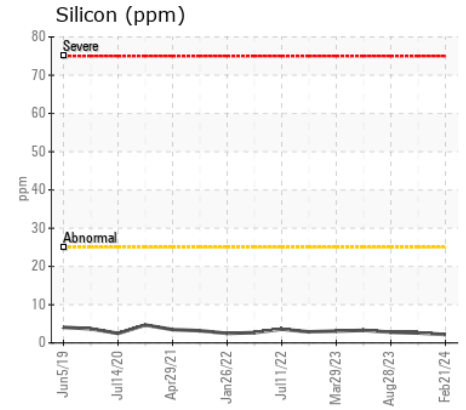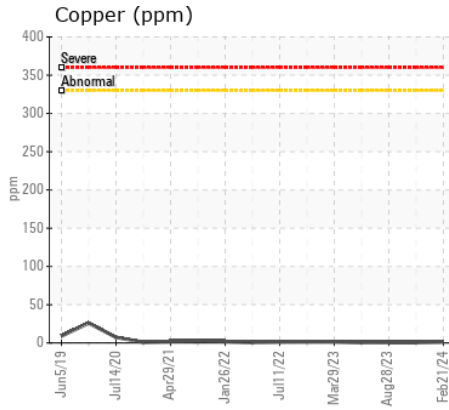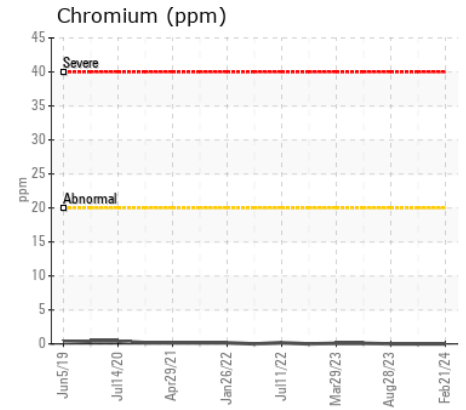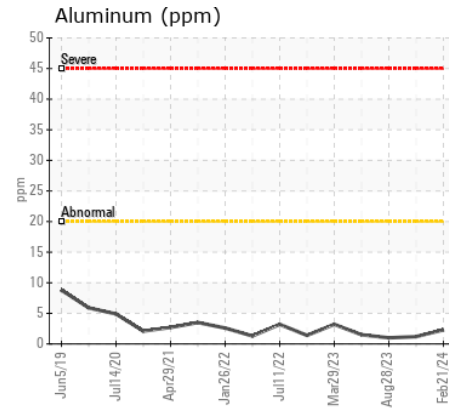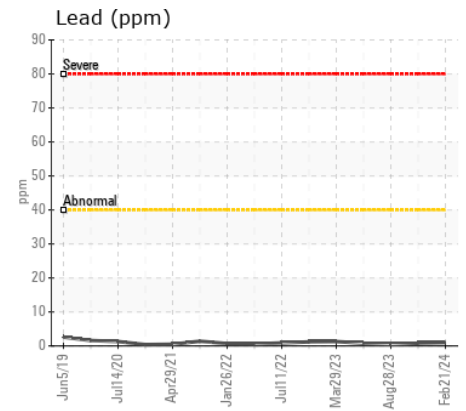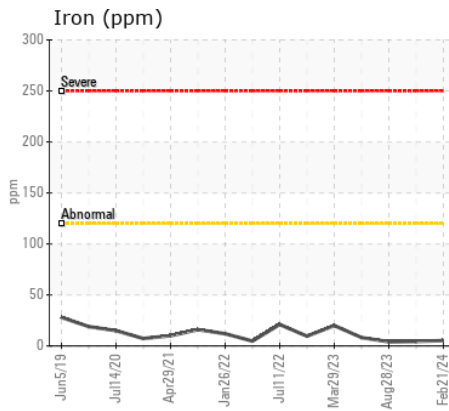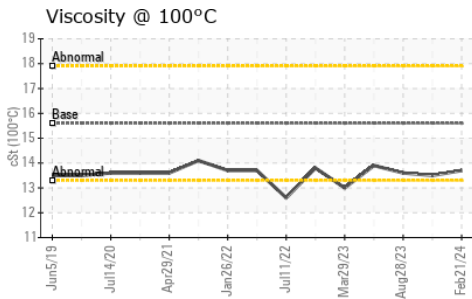

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0111706  
**Lab Number** : 02619481  
**Unique Number** : 5736591  
**Test Package** : MOB 1  
**Received** : 04 Mar 2024  
**Tested** : 04 Mar 2024  
**Diagnosed** : 04 Mar 2024 - Wes Davis

**GFL Environmental - 252 - GTA Hauling**  
 3668 Weston Road  
 North York, ON  
 CA M9L 1W2  
 Contact: Amanda Cipollone  
 acipollone@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: