



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
501126
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0108196	GFL0090892	GFL0079655
Sample Date		Client Info		27 Feb 2024	19 Oct 2023	02 May 2023
Machine Age	kms	Client Info		577289	522608	462895
Oil Age	kms	Client Info		0	110957	51244
Filter Age	kms	Client Info		0	110957	51244
Oil Changed		Client Info		N/A	Not Changd	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>80	26	29	21
Chromium	ppm	ASTM D5185(m)	>5	4	4	3
Nickel	ppm	ASTM D5185(m)	>2	1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>30	13	12	11
Lead	ppm	ASTM D5185(m)	>30	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>150	12	11	8
Tin	ppm	ASTM D5185(m)	>5	1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	8	8	5
Potassium	ppm	ASTM D5185(m)	>20	2	4	5
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	0.0
Soot %	%	ASTM D7844*	>3	0.7	0.6	0.3
Nitration	Abs/cm	ASTM D7624*	>20	9.5	9.2	7.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	22.1	21.9	19.4
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	2	2
Boron	ppm	ASTM D5185(m)	2	2	6	2
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	62	68	59
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	950	985	961	967
Calcium	ppm	ASTM D5185(m)	1050	1120	1168	1151
Phosphorus	ppm	ASTM D5185(m)	995	1004	984	1085
Zinc	ppm	ASTM D5185(m)	1180	1225	1219	1226
Sulfur	ppm	ASTM D5185(m)	2600	2187	2139	2528
Oxidation	Abs/.1mm	ASTM D7414*	>25	18.9	18.0	15.6
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.5	11.2	11.4

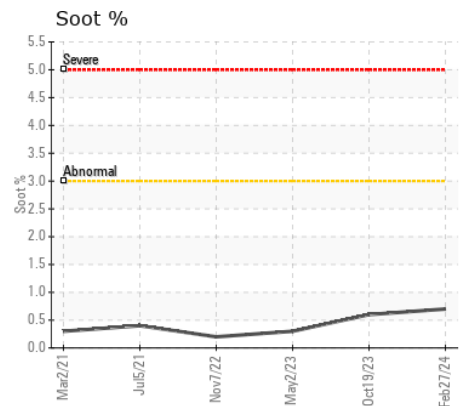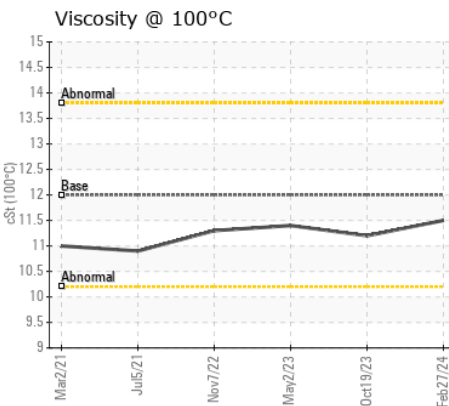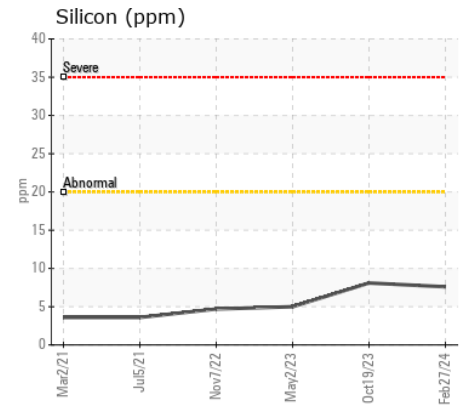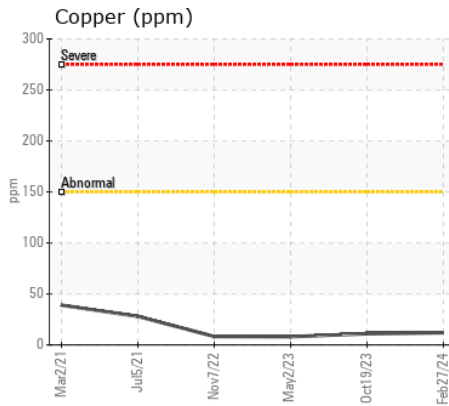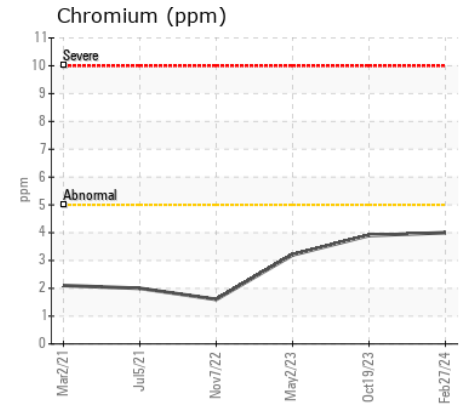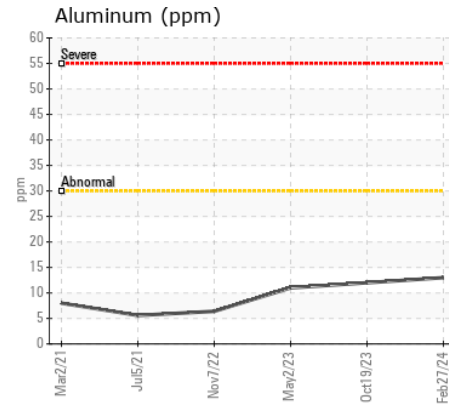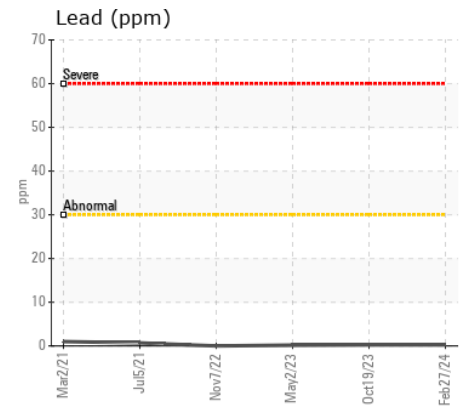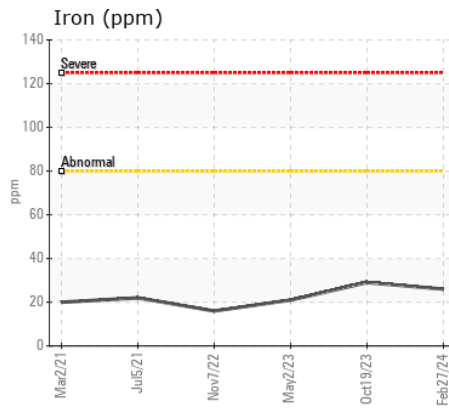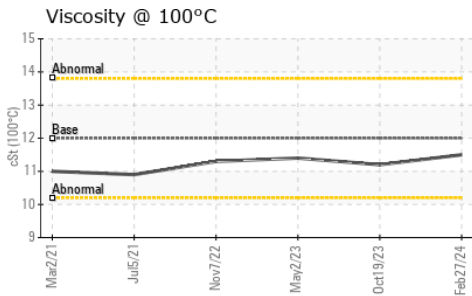

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0108196
Lab Number : 02619484
Unique Number : 5736594
Test Package : MOB 1
Received : 04 Mar 2024
Tested : 04 Mar 2024
Diagnosed : 04 Mar 2024 - Wes Davis

GFL Environmental - 245 - BJ Bear
 2616 Cedar Creek Road
 Ayr, ON
 CA N0B 1E0
 Contact: Erik Prpic
 eppric@gflenv.com
 T: (519)570-9000
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.