

Area
[1234788]
Machine Id
114001
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0110663	GFL0088982	GFL0073012
Sample Date		Client Info		29 Feb 2024	22 Aug 2023	09 Mar 2023
Machine Age	hrs	Client Info		3379	2658	2444
Oil Age	hrs	Client Info		0	0	2444
Filter Age	hrs	Client Info		0	0	2444
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>165	4	7	9
Chromium	ppm	ASTM D5185(m)	>5	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	0	0	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	3	2
Lead	ppm	ASTM D5185(m)	>150	0	<1	<1
Copper	ppm	ASTM D5185(m)	>90	<1	1	1
Tin	ppm	ASTM D5185(m)	>5	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>35	2	4	4
Potassium	ppm	ASTM D5185(m)	>20	5	10	5
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>7.5	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	5.8	6.5	6.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.9	18.9	19.0
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	4	4
Boron	ppm	ASTM D5185(m)	0	2	6	5
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	60	58	59	60
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	1010	963	973	997
Calcium	ppm	ASTM D5185(m)	1070	1039	1026	1130
Phosphorus	ppm	ASTM D5185(m)	1150	1032	1066	1116
Zinc	ppm	ASTM D5185(m)	1270	1179	1181	1216
Sulfur	ppm	ASTM D5185(m)	2060	2826	2651	2788
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.5	13.7	13.5
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.9	13.8	13.5

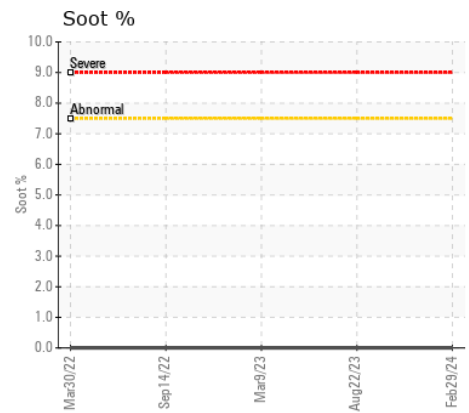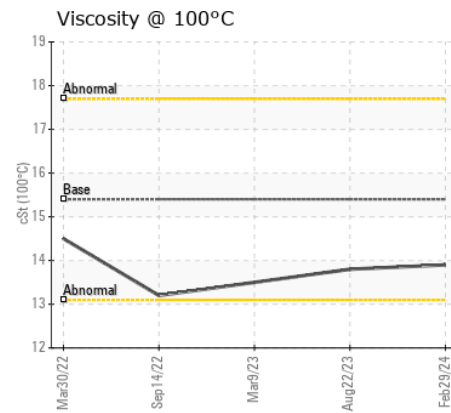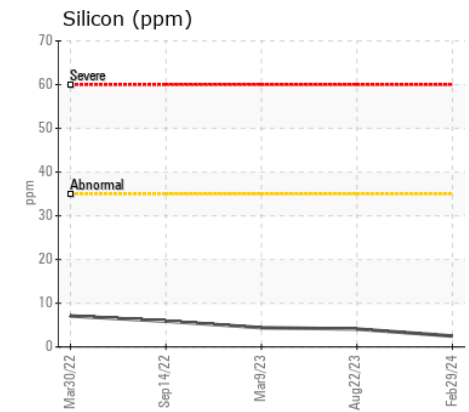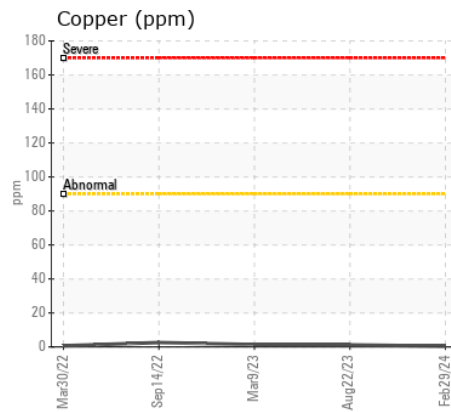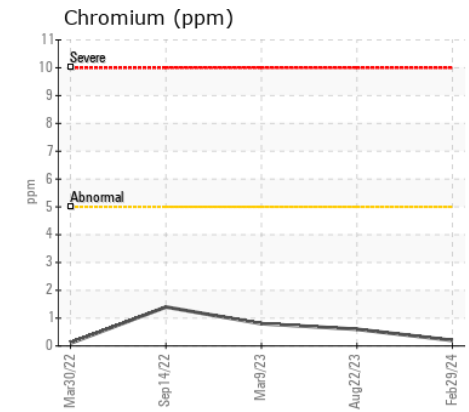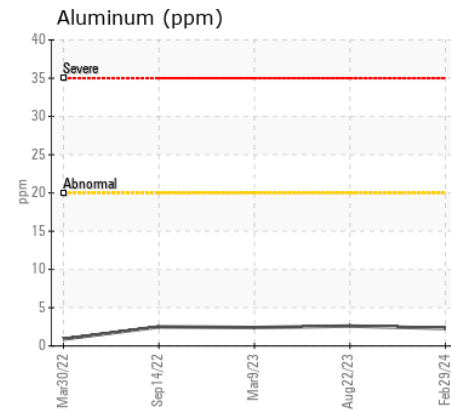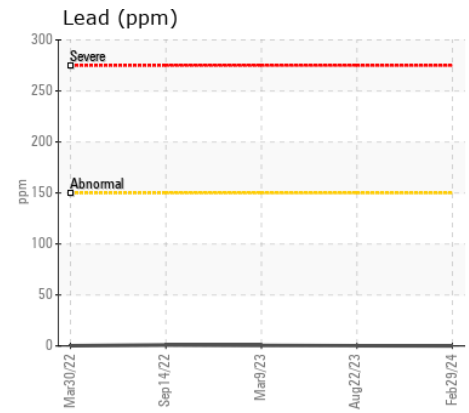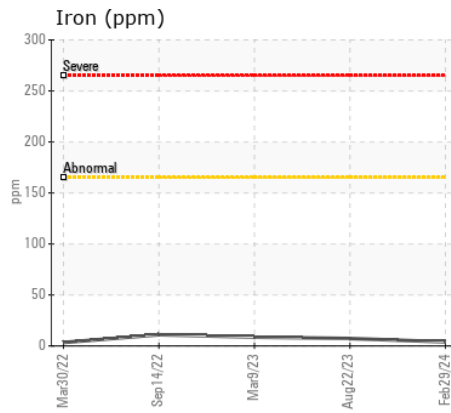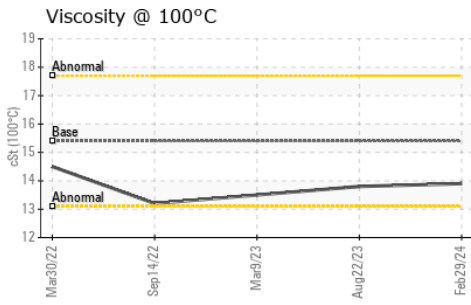

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0110663
Lab Number : 02619853
Unique Number : 5736963
Test Package : MOB 1
Received : 05 Mar 2024
Tested : 05 Mar 2024
Diagnosed : 05 Mar 2024 - Wes Davis

GFL Environmental - 207 - Pickering SW
 1034 TOY AVENUE, PICKERING YARD
 PICKERING, ON
 CA L1W 3P1
 Contact: Ian Patton
 ipatton@gflenv.com
 T: (905)831-6297
 F: (905)426-3577

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.