



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
OR206
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0100859	GFL0100832	GFL0072284
Sample Date		Client Info		23 Feb 2024	28 Dec 2023	25 May 2023
Machine Age	hrs	Client Info		0	0	10709
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	22	27	20
Chromium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<1	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	2	2	2
Lead	ppm	ASTM D5185(m)	>40	<1	1	<1
Copper	ppm	ASTM D5185(m)	>330	2	2	2
Tin	ppm	ASTM D5185(m)	>15	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	4	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0.2	0.5	0.4
Nitration	Abs/cm	ASTM D7624*	>20	9.9	10.7	7.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.3	20.7	19.7
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	3	2
Boron	ppm	ASTM D5185(m)	250	2	2	6
Barium	ppm	ASTM D5185(m)	10	0	0	0
Molybdenum	ppm	ASTM D5185(m)	100	62	62	63
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	450	1020	1016	1010
Calcium	ppm	ASTM D5185(m)	3000	1082	1117	1176
Phosphorus	ppm	ASTM D5185(m)	1150	1075	1065	1135
Zinc	ppm	ASTM D5185(m)	1350	1245	1231	1244
Sulfur	ppm	ASTM D5185(m)	4250	2825	2726	2704
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.5	18.9	15.7
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.8	11.8	11.7

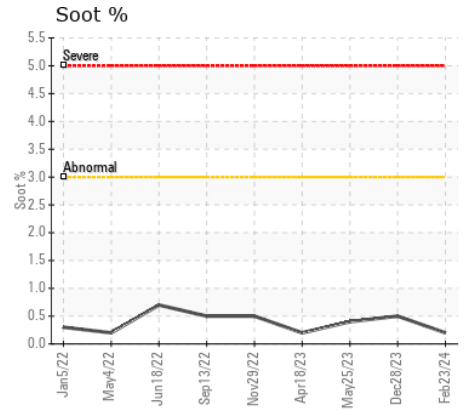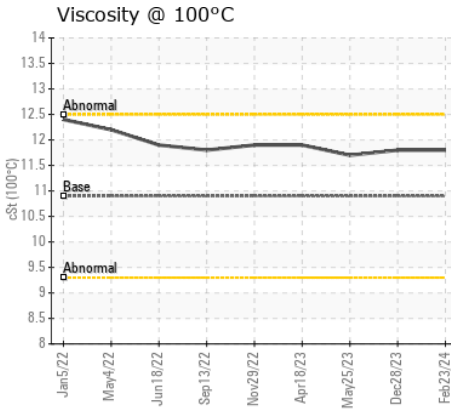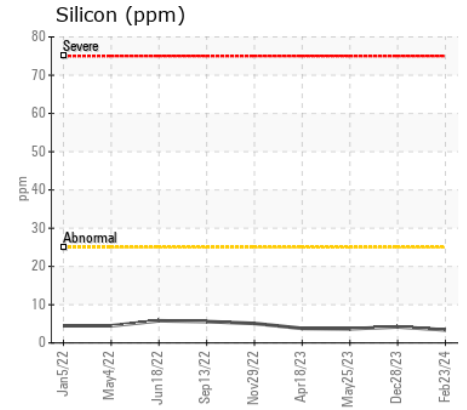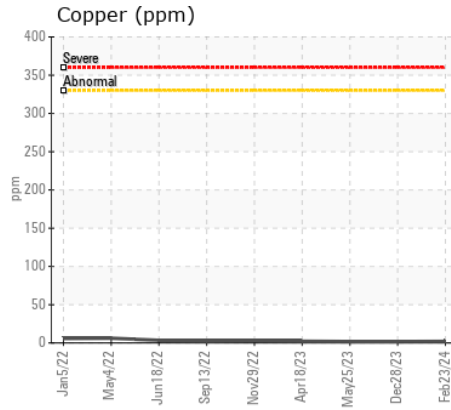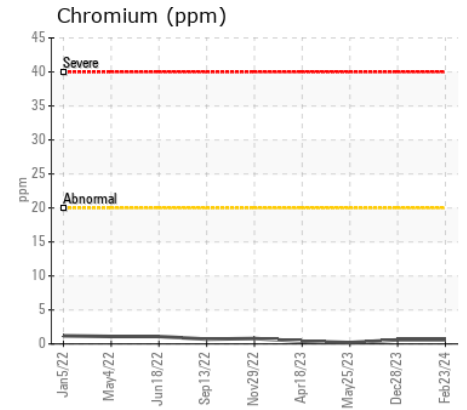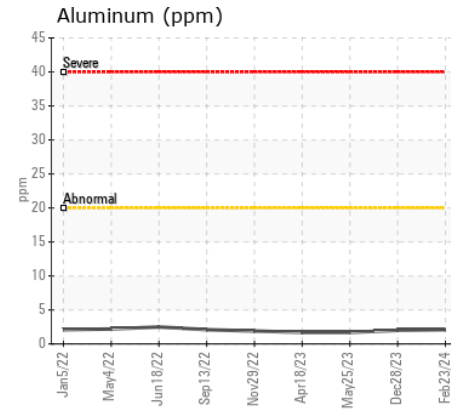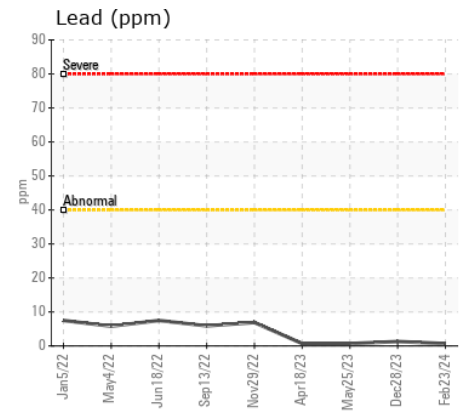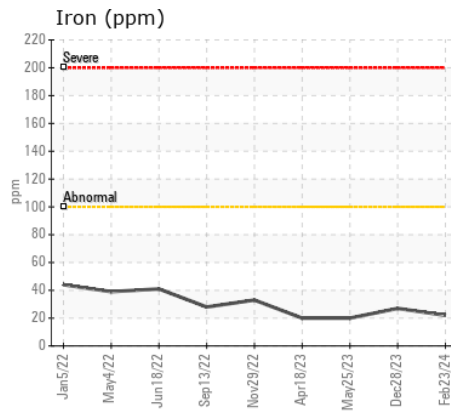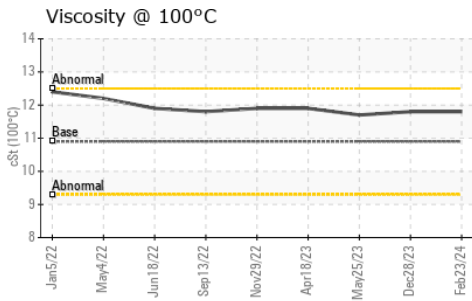

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0100859
Lab Number : 02619870
Unique Number : 5736980
Test Package : MOB 1

GFL Environmental - 520 - Winterburn
 20204 - 113 Avenue,
 Edmonton, AB
 CA T5S 0G3
 Contact: Jaekyung Ko
 jko@gflenv.com
 T: (780)444-8805
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.