



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
510010
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 10W30 (40 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0100860	GFL0100865	GFL0085790
Sample Date		Client Info		12 Feb 2024	21 Nov 2023	18 Sep 2023
Machine Age	kms	Client Info		347760	325934	6021
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	7	7	10
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	2	3
Lead	ppm	ASTM D5185(m)	>40	1	1	1
Copper	ppm	ASTM D5185(m)	>330	4	2	4
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	4	5
Potassium	ppm	ASTM D5185(m)	>20	2	<1	4
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.1	0.2	0.4
Nitration	Abs/cm	ASTM D7624*	>20	7.9	8.6	9.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.9	19.3	20.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	2	2
Boron	ppm	ASTM D5185(m)	2	1	6	2
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	50	60	56	63
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	950	985	905	1029
Calcium	ppm	ASTM D5185(m)	1050	1072	991	1122
Phosphorus	ppm	ASTM D5185(m)	995	1037	933	1035
Zinc	ppm	ASTM D5185(m)	1180	1204	1120	1271
Sulfur	ppm	ASTM D5185(m)	2600	2735	2419	2488
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.5	15.8	16.7
Visc @ 100°C	cSt	ASTM D7279(m)	12.00	11.5	12.0	11.4

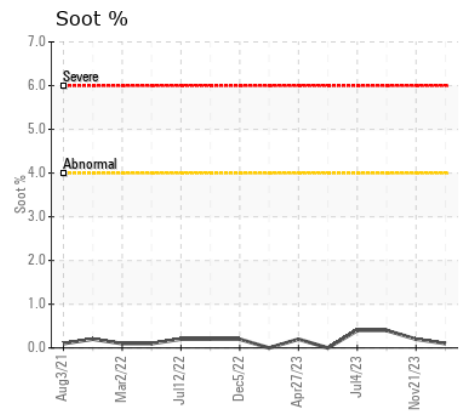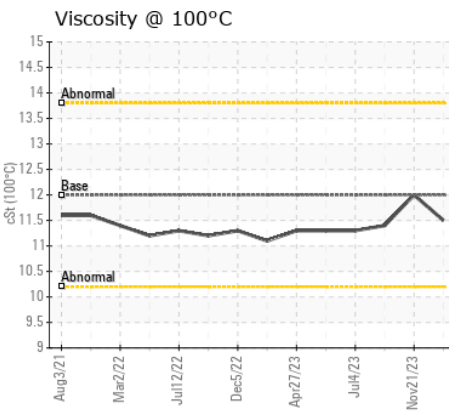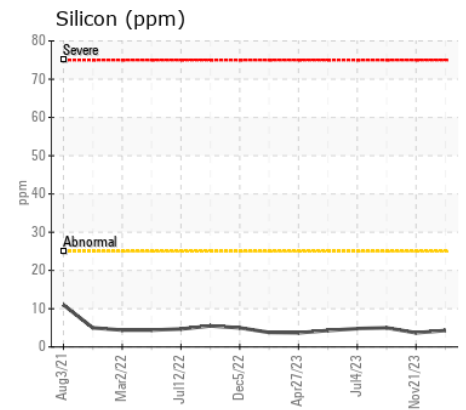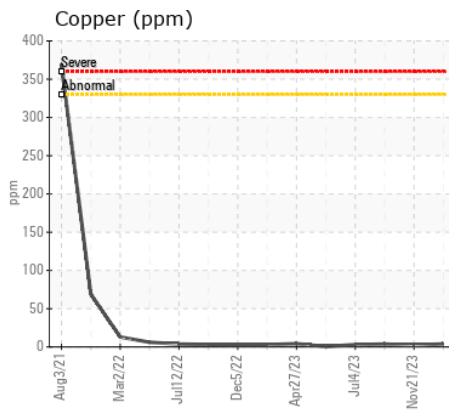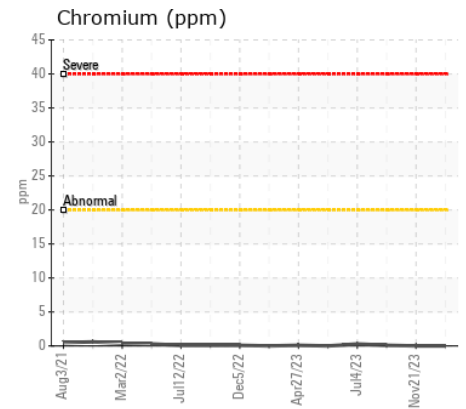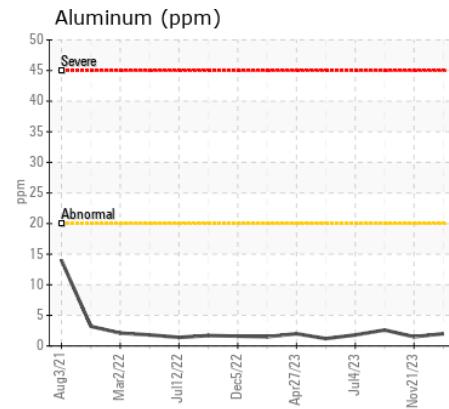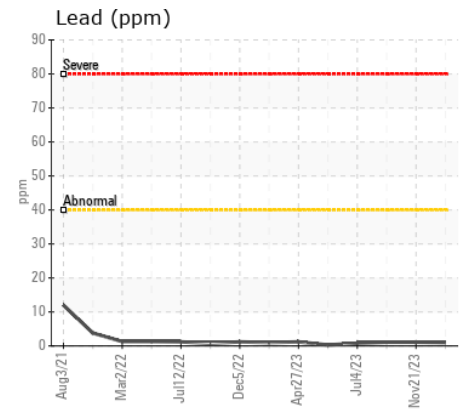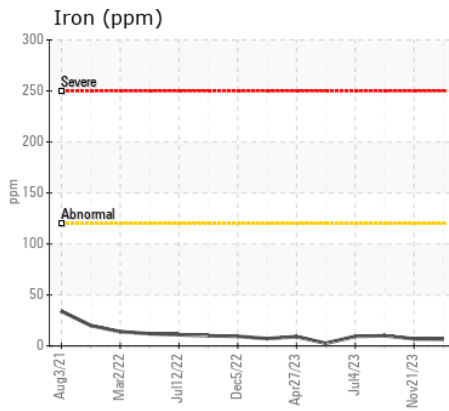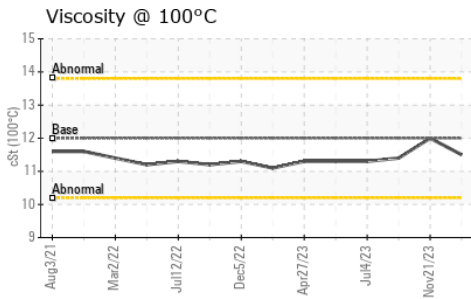

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0100860
Lab Number : 02619871
Unique Number : 5736981
Test Package : MOB 1

GFL Environmental - 520 - Winterburn
 20204 - 113 Avenue,
 Edmonton, AB
 CA T5S 0G3
 Contact: Jaekyung Ko
 jko@gflenv.com
 T: (780)444-8805
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.