



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[600286]
Machine Id
LIEBHERR HS895HD 188227
Component
Left Track Drive
Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0286560	LH0270138	---
Sample Date		Client Info		01 Mar 2024	13 Oct 2023	---
Machine Age	hrs	Client Info		26121	25204	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>1000	16	7	---
Chromium	ppm	ASTM D5185(m)	>30	0	0	---
Nickel	ppm	ASTM D5185(m)	>7	<1	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	<1	---
Aluminum	ppm	ASTM D5185(m)	>25	3	0	---
Lead	ppm	ASTM D5185(m)	>50	0	<1	---
Copper	ppm	ASTM D5185(m)	>100	4	9	---
Tin	ppm	ASTM D5185(m)	>5	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>150	9	2	---
Potassium	ppm	ASTM D5185(m)	>20	2	<1	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	1	---
Boron	ppm	ASTM D5185(m)	328	26	255	---
Barium	ppm	ASTM D5185(m)	1	<1	<1	---
Molybdenum	ppm	ASTM D5185(m)		4	1	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)	1	64	24	---
Calcium	ppm	ASTM D5185(m)	7	123	70	---
Phosphorus	ppm	ASTM D5185(m)	1145	683	1103	---
Zinc	ppm	ASTM D5185(m)	3	176	130	---
Sulfur	ppm	ASTM D5185(m)	17909	15112	17023	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	73.3	87.7	---

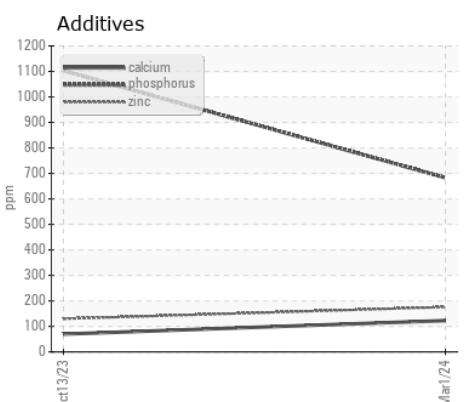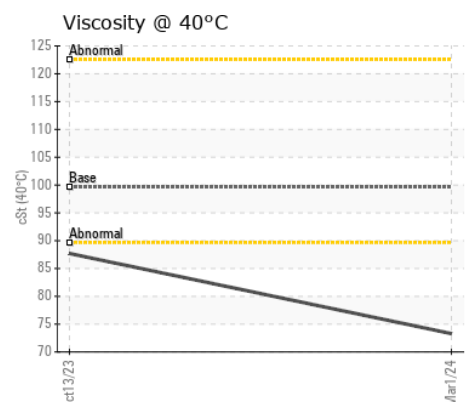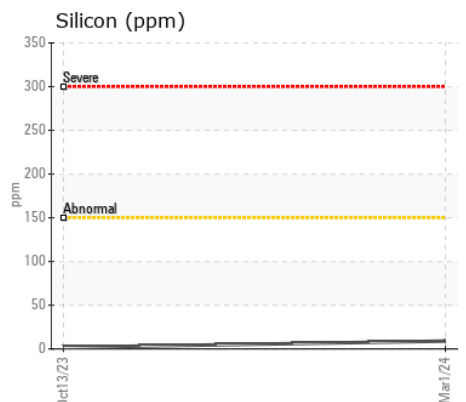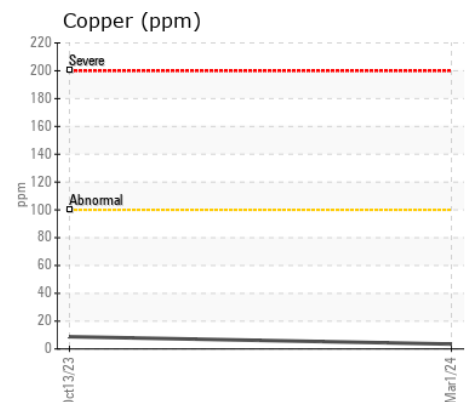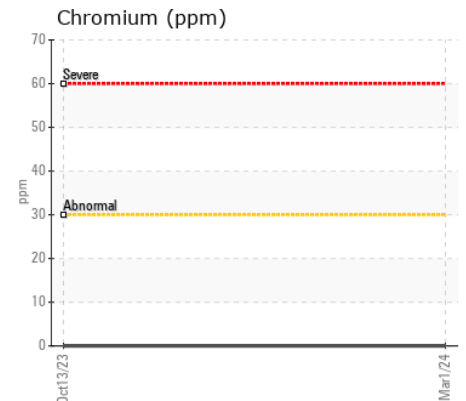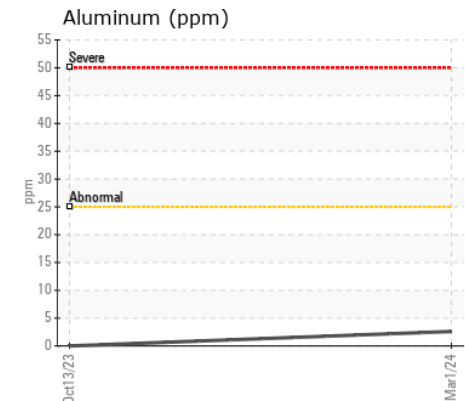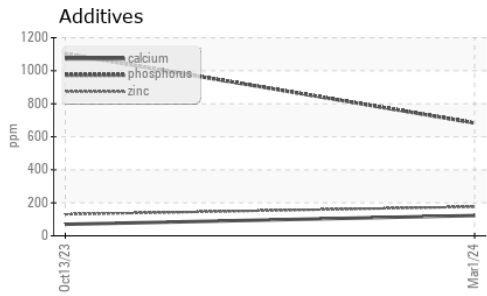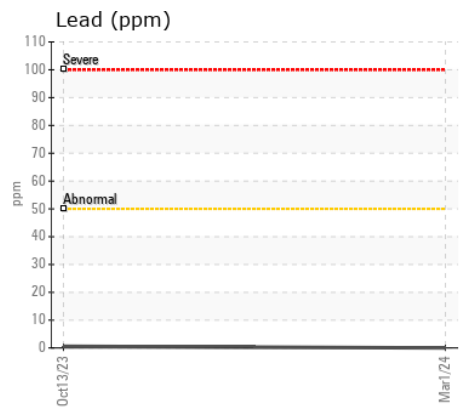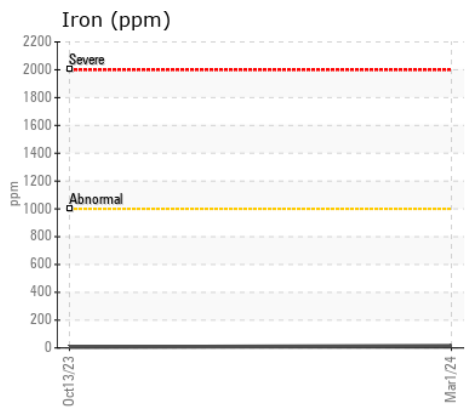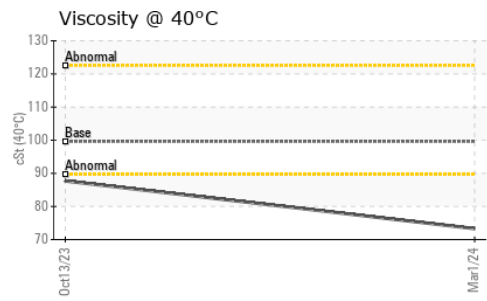

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0286560
Lab Number : 02619964
Unique Number : 5737074
Test Package : MOB 1
Received : 05 Mar 2024
Tested : 05 Mar 2024
Diagnosed : 05 Mar 2024 - Wes Davis

HIGGS & HIGGS
 RR # 4
 ST THOMAS, ON
 CA N5P 3S8
 Contact: Bernie Higgs

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (519)631-4095
 F: (519)631-2745