



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**OR877**

Component  
**Left Planetary**

Fluid  
**GEAR OIL SAE 80W90 (--- GAL)**

**RECOMMENDATION**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0089239</b>	GFL0061627	GFL0026146
Sample Date		Client Info		<b>29 Feb 2024</b>	22 Jun 2023	02 Nov 2021
Machine Age	hrs	Client Info		<b>8249</b>	7315	5289
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Filter Changed		Client Info		<b>N/A</b>	N/A	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>500	<b>25</b>	54	21
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	0	<1
Copper	ppm	ASTM D5185(m)	>75	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>75	<b>1</b>	2	<1
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)	>170	<b>2</b>	2	2
Boron	ppm	ASTM D5185(m)	400	<b>3</b>	15	12
Barium	ppm	ASTM D5185(m)	200	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	12	<b>0</b>	0	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)	12	<b>&lt;1</b>	1	<1
Calcium	ppm	ASTM D5185(m)	150	<b>4</b>	10	10
Phosphorus	ppm	ASTM D5185(m)	1650	<b>2311</b>	2273	2471
Zinc	ppm	ASTM D5185(m)	125	<b>3</b>	21	4
Sulfur	ppm	ASTM D5185(m)	22500	<b>24982</b>	24569	34873
Visc @ 40°C	cSt	ASTM D7279(m)	143	<b>187</b>	171	177

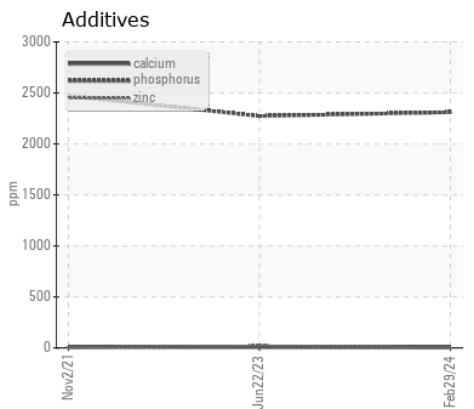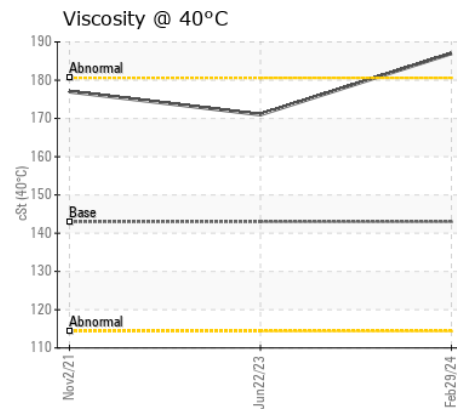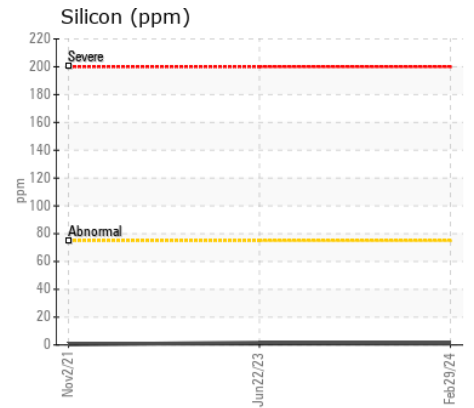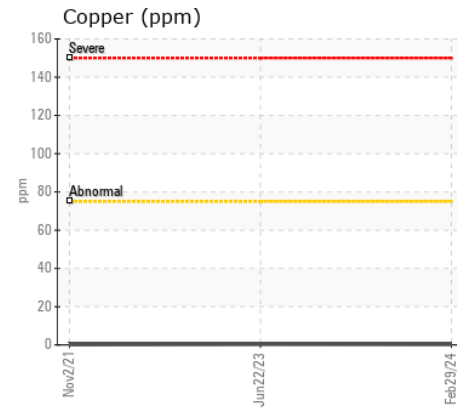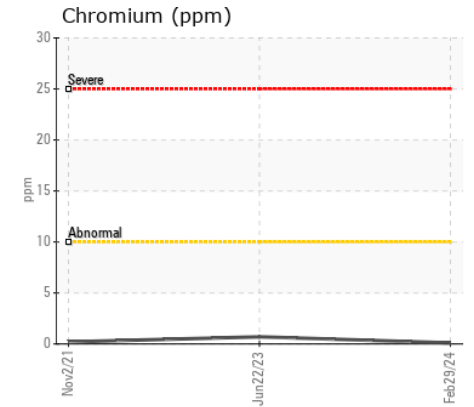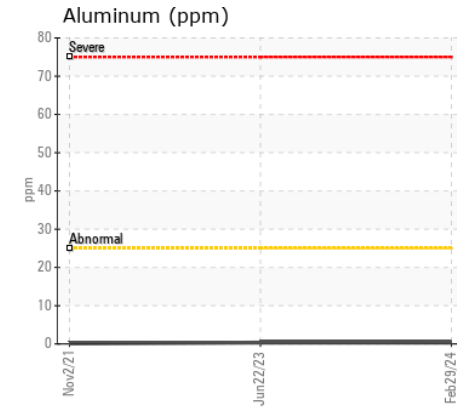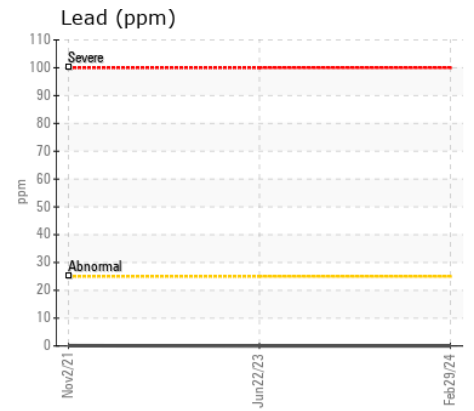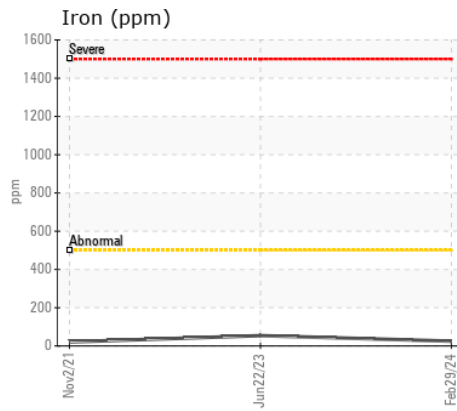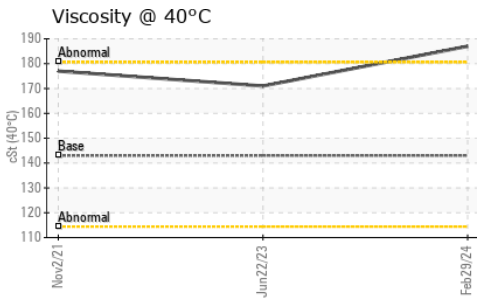

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0089239  
**Lab Number** : 02619979  
**Unique Number** : 5737089  
**Test Package** : MOB 1

**GFL Environmental - 784 - Saint-Hyacinthe**  
 3525 Boul. Laurier Est.,  
 Saint-Hyacinthe, QC  
 CA J2R 2B2  
 Contact: Nadine Authier  
 nauthier@matrec.ca  
 T: (450)773-9689  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.