



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area  
**[600286]**  
Machine Id  
**LIEBHERR HS895HD 188227**  
Component  
**Right Slewing Gearbox**  
Fluid  
**PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)**

### RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.  
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0286564</b>	LH0274762	---
Sample Date		Client Info		<b>01 Mar 2024</b>	13 Oct 2023	---
Machine Age	hrs	Client Info		<b>26121</b>	25204	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Filter Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed		Client Info		<b>N/A</b>	N/A	---
Filter Changed		Client Info		<b>N/A</b>	N/A	---
Sample Status				<b>NORMAL</b>	ABNORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	<b>11</b>	18	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185(m)		<b>&lt;1</b>	0	---
Lead	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	2	---
Copper	ppm	ASTM D5185(m)	>35	<b>41</b>	▲ 60	---
Tin	ppm	ASTM D5185(m)	>5	<b>2</b>	3	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	---

### CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>&lt;1</b>	2	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	0	---
Water		WC Method	>0.2	<b>NEG</b>	NEG	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	---

### FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of oil.  
The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	---
Boron	ppm	ASTM D5185(m)	328	<b>32</b>	307	---
Barium	ppm	ASTM D5185(m)	1	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	0	---
Magnesium	ppm	ASTM D5185(m)	1	<b>&lt;1</b>	1	---
Calcium	ppm	ASTM D5185(m)	7	<b>3</b>	10	---
Phosphorus	ppm	ASTM D5185(m)	1145	<b>783</b>	1219	---
Zinc	ppm	ASTM D5185(m)	3	<b>4</b>	10	---
Sulfur	ppm	ASTM D5185(m)	17909	<b>20700</b>	20378	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>89.0</b>	101	---

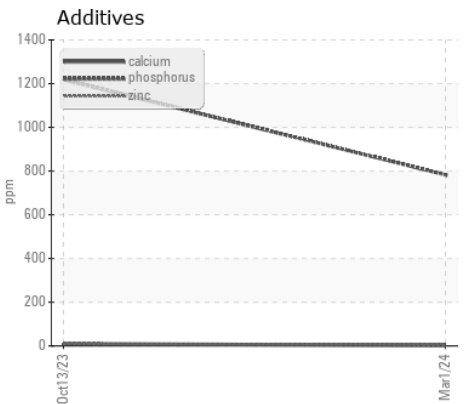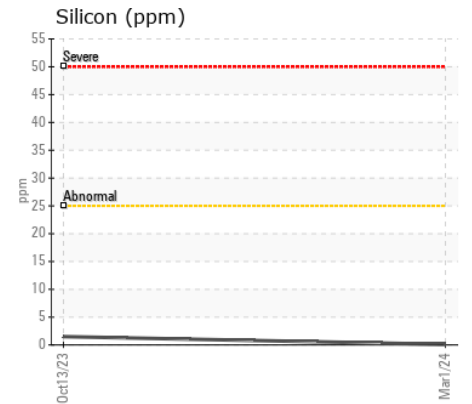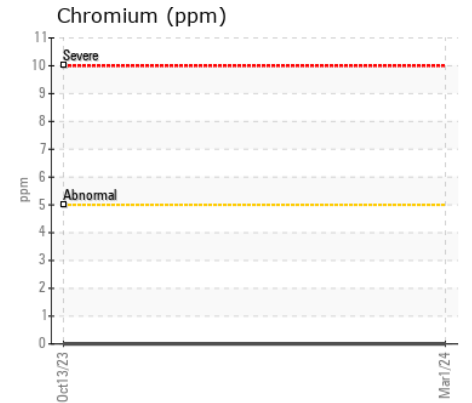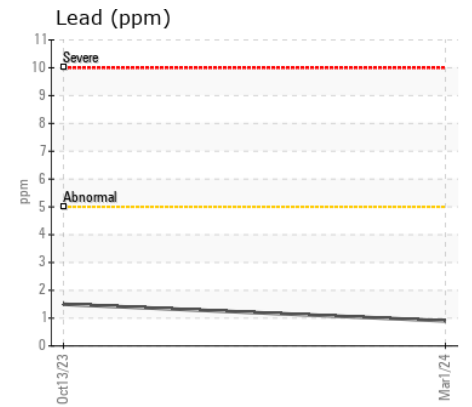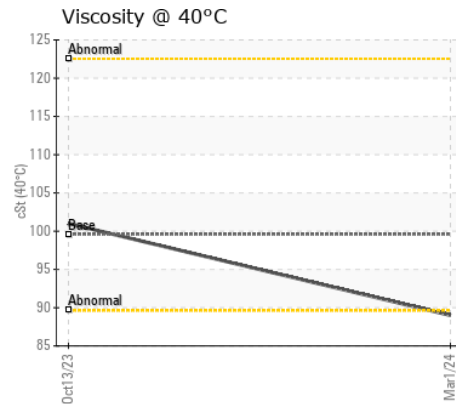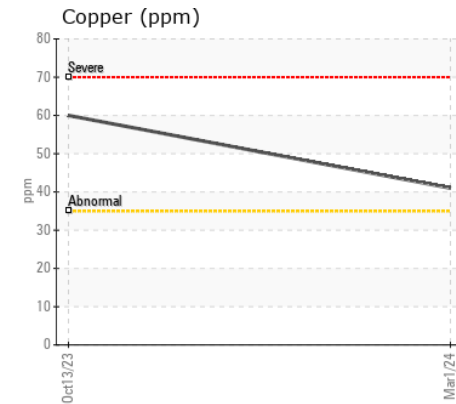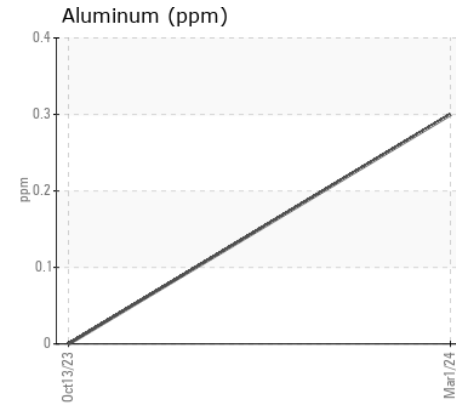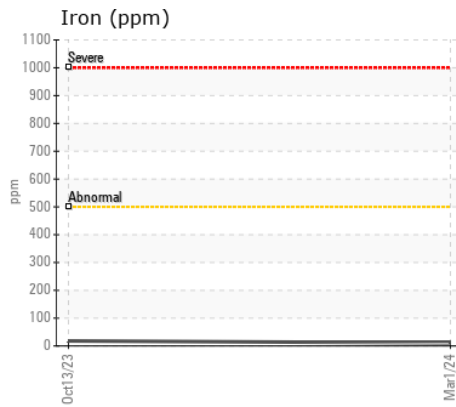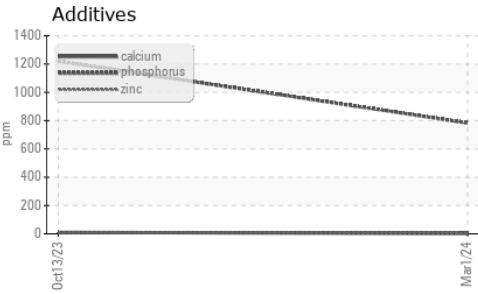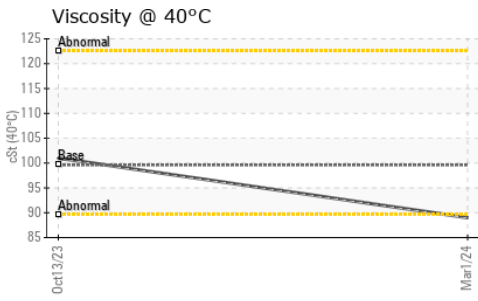

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0286564  
**Lab Number** : 02619984  
**Unique Number** : 5737094  
**Test Package** : MOB 1  
**Received** : 05 Mar 2024  
**Tested** : 05 Mar 2024  
**Diagnosed** : 06 Mar 2024 - Kevin Marson

**HIGGS & HIGGS**  
 RR # 4  
 ST THOMAS, ON  
 CA N5P 3S8  
 Contact: Bernie Higgs

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T: (519)631-4095  
 F: (519)631-2745