



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
KENWORTH 22-61
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON UHP 5W40 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0081765	PC0081760	PC0066977
Sample Date		Client Info		01 Mar 2024	01 Dec 2023	13 Sep 2023
Machine Age	kms	Client Info		549945	510855	460000
Oil Age	kms	Client Info		39908	41535	40000
Filter Age	kms	Client Info		39908	41535	40000
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	31	31	28
Chromium	ppm	ASTM D5185(m)	>20	2	2	1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	2	2
Lead	ppm	ASTM D5185(m)	>40	7	6	5
Copper	ppm	ASTM D5185(m)	>330	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	6	6	8
Potassium	ppm	ASTM D5185(m)	>20	2	<1	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>6	0.5	0.6	0.7
Nitration	Abs/cm	ASTM D7624*	>20	11.8	12.2	12.1
Sulfation	Abs/.1mm	ASTM D7415*	>30	28.0	28.3	27.6
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	5	5
Boron	ppm	ASTM D5185(m)	65	27	22	19
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	65	63	63	61
Manganese	ppm	ASTM D5185(m)	0	0	0	0
Magnesium	ppm	ASTM D5185(m)	1160	1221	1230	1177
Calcium	ppm	ASTM D5185(m)	820	954	909	916
Phosphorus	ppm	ASTM D5185(m)	1160	1083	1062	1030
Zinc	ppm	ASTM D5185(m)	1260	1306	1306	1284
Sulfur	ppm	ASTM D5185(m)	3000	2687	2545	2525
Oxidation	Abs/.1mm	ASTM D7414*	>25	28.4	28.3	27.1
Visc @ 40°C	cSt	ASTM D7279(m)	95.1	84.5	83.4	86.6
Visc @ 100°C	cSt	ASTM D7279(m)	14.3	13.1	12.9	13.3
Viscosity Index (VI)	Scale	ASTM D2270*	169	155	154	154

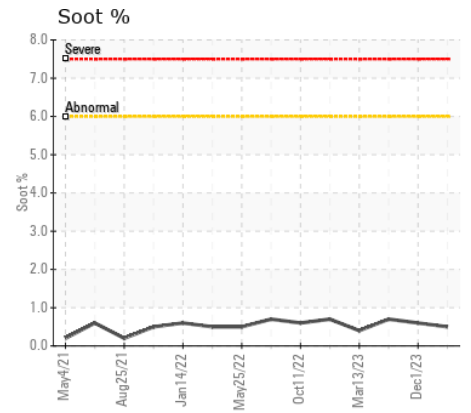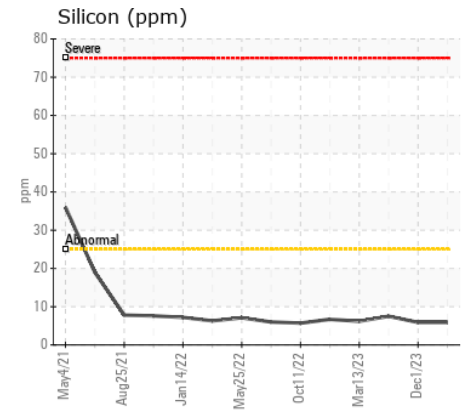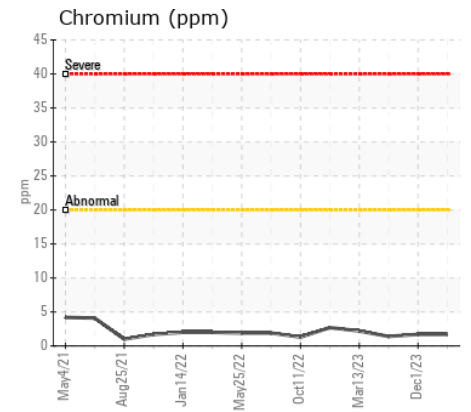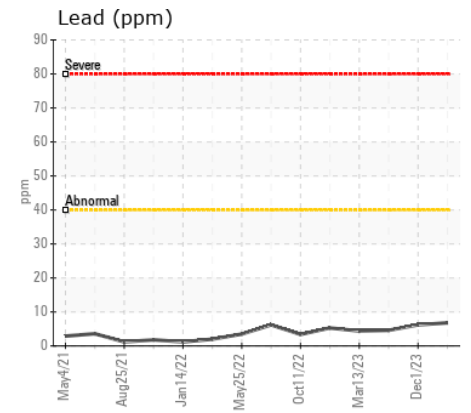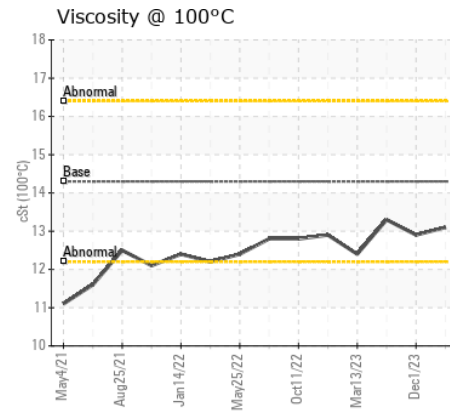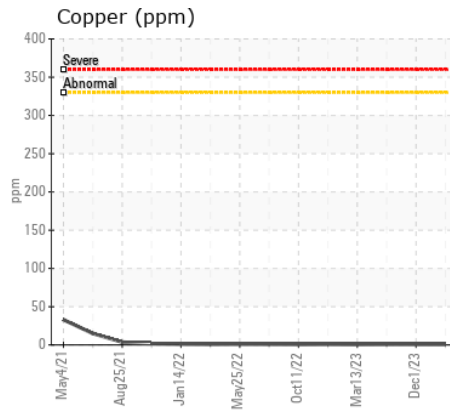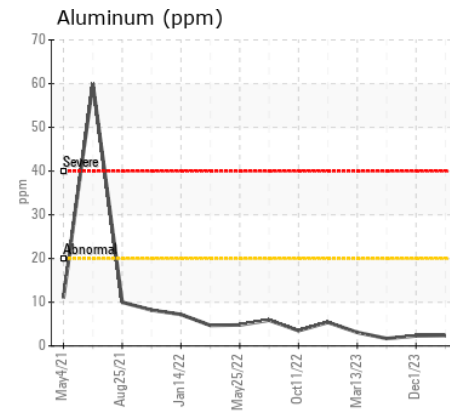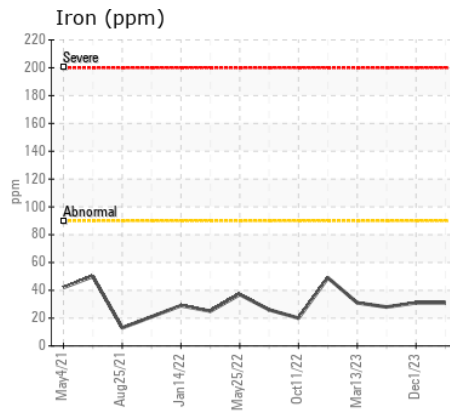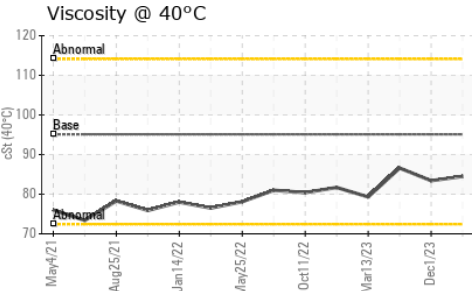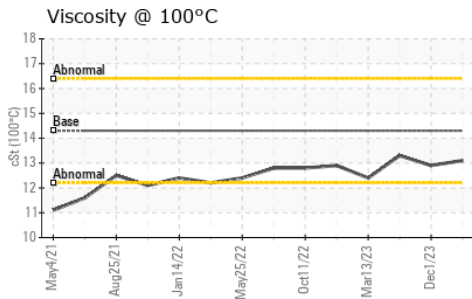

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0081765
Lab Number : 02620073
Unique Number : 5737183
Test Package : MOB 1 (Additional Tests: KV40, VI)

Received : 06 Mar 2024
Tested : 06 Mar 2024
Diagnosed : 06 Mar 2024 - Kevin Marson

B & A PETROLEUM
 2004 SOUTH SERVICE ROAD WEST, BOX 1583
 SWIFT CURRENT, SK
 CA S9H 5J5
 Contact: DARRYL MEYER
 dmeyer@bapetroleumltd.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (306)773-8890
 F: (306)773-8443