



OIL ANALYSIS REPORT

| | |
|-----------------|---------------|
| WEAR | NORMAL |
| CONTAMINATION | NORMAL |
| FLUID CONDITION | NORMAL |

Area
[103010]
 Machine Id
16VA006795
 Component
Diesel Engine
 Fluid
{not provided} (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

| Test | UOM | Method | Limit/Abn | Current | History1 | History2 |
|----------------|-----|-------------|-----------|--------------------|----------|----------|
| Sample Number | | Client Info | | CU0020727 | --- | --- |
| Sample Date | | Client Info | | 05 Mar 2024 | --- | --- |
| Machine Age | hrs | Client Info | | 1180 | --- | --- |
| Oil Age | hrs | Client Info | | 0 | --- | --- |
| Filter Age | hrs | Client Info | | 0 | --- | --- |
| Oil Changed | | Client Info | | N/A | --- | --- |
| Filter Changed | | Client Info | | N/A | --- | --- |
| Sample Status | | | | NORMAL | --- | --- |

WEAR

All component wear rates are normal.

| | | | | | | |
|----------|-----|---------------|------|--------------|-----|-----|
| Iron | ppm | ASTM D5185(m) | >200 | 3 | --- | --- |
| Chromium | ppm | ASTM D5185(m) | >20 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185(m) | >2 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185(m) | >2 | 0 | --- | --- |
| Silver | ppm | ASTM D5185(m) | >2 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185(m) | >30 | 1 | --- | --- |
| Lead | ppm | ASTM D5185(m) | >30 | <1 | --- | --- |
| Copper | ppm | ASTM D5185(m) | >30 | <1 | --- | --- |
| Tin | ppm | ASTM D5185(m) | >15 | 0 | --- | --- |
| Vanadium | ppm | ASTM D5185(m) | | 0 | --- | --- |

CONTAMINATION










There is no indication of any contamination in the oil.

| | | | | | | |
|------------------|----------|---------------|------|----------------|-----|-----|
| Silicon | ppm | ASTM D5185(m) | >30 | 5 | --- | --- |
| Potassium | ppm | ASTM D5185(m) | >20 | <1 | --- | --- |
| Fuel | | WC Method | >3.0 | <1.0 | --- | --- |
| Water | | WC Method | >0.2 | NEG | --- | --- |
| Glycol | | WC Method | | NEG | --- | --- |
| Soot % | % | ASTM D7844* | >3 | 0 | --- | --- |
| Nitration | Abs/cm | ASTM D7624* | >20 | 6.3 | --- | --- |
| Sulfation | Abs/.1mm | ASTM D7415* | >30 | 19.9 | --- | --- |
| Emulsified Water | scalar | Visual* | >0.2 | NEG | --- | --- |

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

| | | | | | | |
|--------------|----------|---------------|-----|-------------|-----|-----|
| Sodium | ppm | ASTM D5185(m) | | 3 | --- | --- |
| Boron | ppm | ASTM D5185(m) | | 43 | --- | --- |
| Barium | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Molybdenum | ppm | ASTM D5185(m) | | 47 | --- | --- |
| Manganese | ppm | ASTM D5185(m) | | 0 | --- | --- |
| Magnesium | ppm | ASTM D5185(m) | | 769 | --- | --- |
| Calcium | ppm | ASTM D5185(m) | | 1133 | --- | --- |
| Phosphorus | ppm | ASTM D5185(m) | | 691 | --- | --- |
| Zinc | ppm | ASTM D5185(m) | | 777 | --- | --- |
| Sulfur | ppm | ASTM D5185(m) | | 1983 | --- | --- |
| Oxidation | Abs/.1mm | ASTM D7414* | >25 | 16.9 | --- | --- |
| Visc @ 100°C | cSt | ASTM D7279(m) | | 14.0 | --- | --- |

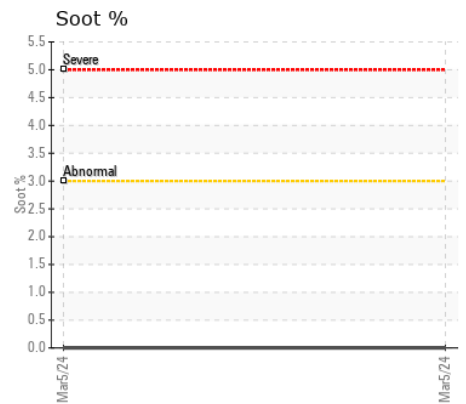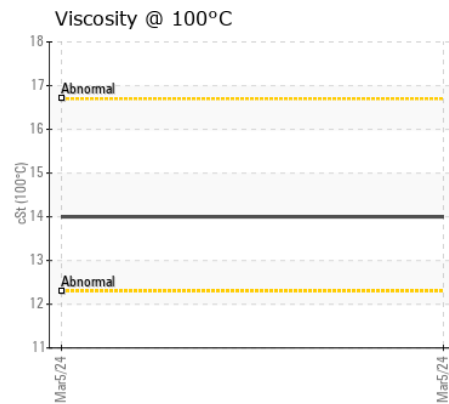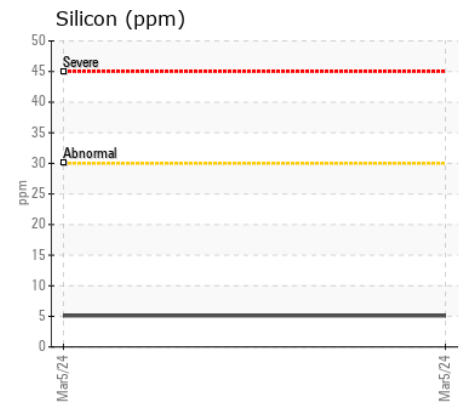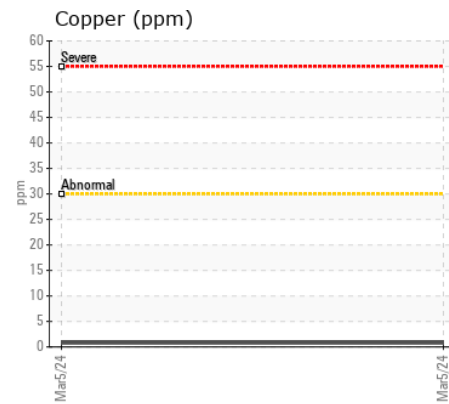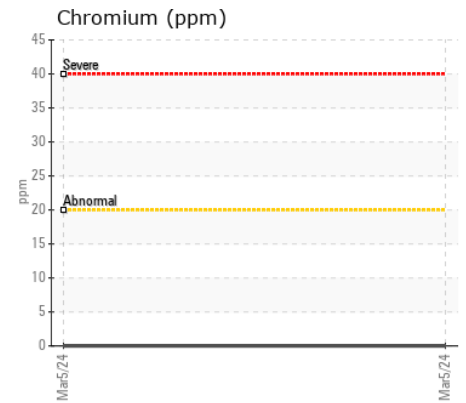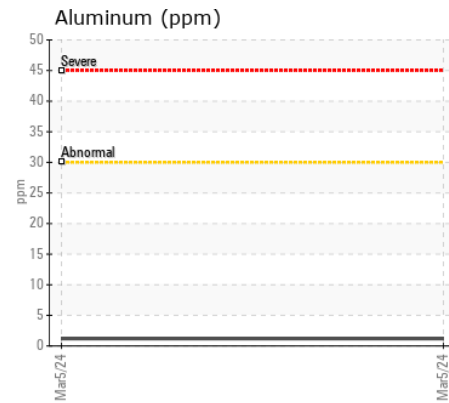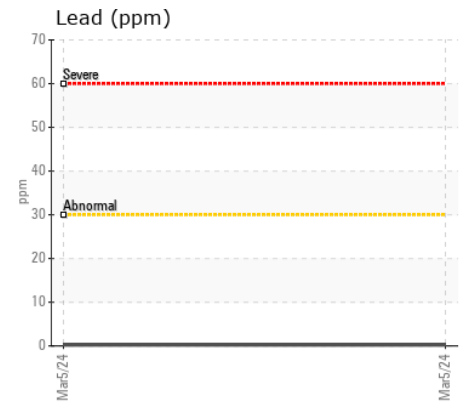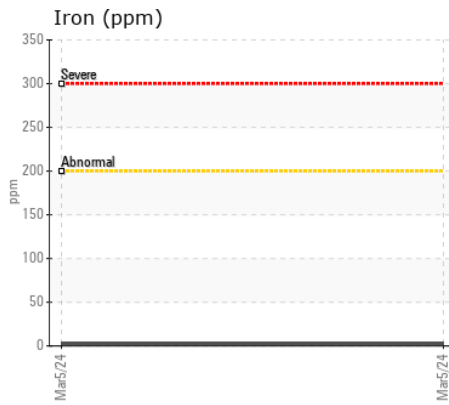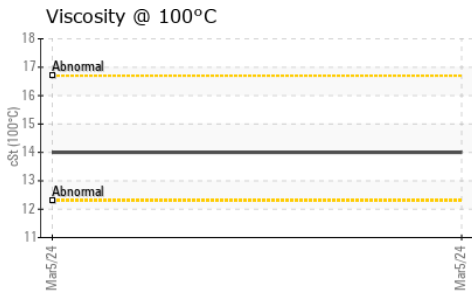

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : CU0020727
Lab Number : 02620098
Unique Number : 5737208
Test Package : MOB 1
Received : 06 Mar 2024
Tested : 06 Mar 2024
Diagnosed : 06 Mar 2024 - Kevin Marson

CUMMINS EASTERN CANADA LP
 3189 SWANSEA CRESCENT
 OTTAWA, ON
 CA K1G 3W5
 Contact: Cindy Harrison
 cindy.harrison@cummins.com
 T: (613)736-1146
 F: x:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.