



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
14168

Component
Front Diesel Engine

Fluid
CASTROL HYPURON ADVANCED FORMULA (40 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0071312	AP108374	AP108300
Sample Date		Client Info		05 Mar 2024	21 Jan 2019	05 Nov 2018
Machine Age	hrs	Client Info		0	6088	5275
Oil Age	hrs	Client Info		0	813	707
Filter Age	hrs	Client Info		0	813	707
Oil Changed		Client Info		N/A	Changed	Changed
Filter Changed		Client Info		N/A	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	8	9	10
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	4	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	<1	<1
Silver	ppm	ASTM D5185(m)	>2	0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	1	2	2
Lead	ppm	ASTM D5185(m)	>40	<1	1	2
Copper	ppm	ASTM D5185(m)	>330	2	4	3
Tin	ppm	ASTM D5185(m)	>15	<1	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	12	3	4
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0	0.2	0.1
Nitration	Abs/cm	ASTM D7624*	>20	6.1	9.6	9.9
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.6	21.8	22.8
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	8	10
Boron	ppm	ASTM D5185(m)		13	36	29
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		55	57	60
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		887	1040	1086
Calcium	ppm	ASTM D5185(m)		1023	918	954
Phosphorus	ppm	ASTM D5185(m)		969	929	951
Zinc	ppm	ASTM D5185(m)		1077	1182	1206
Sulfur	ppm	ASTM D5185(m)		2685	2600	2530
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.5	18.2	20.3
Visc @ 40°C	cSt	ASTM D7279(m)	82.7	73.4	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	12.1	11.3	11.2	11.4
Viscosity Index (VI)	Scale	ASTM D2270*	142	145	---	---

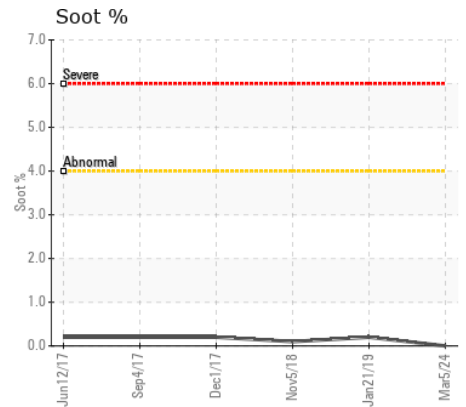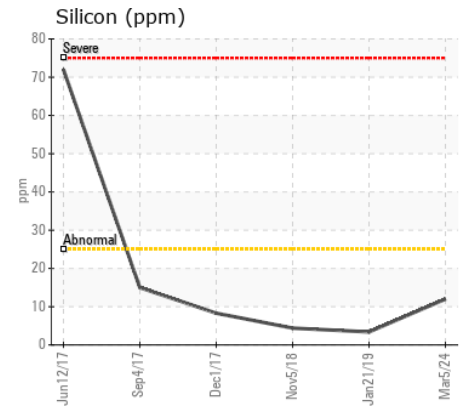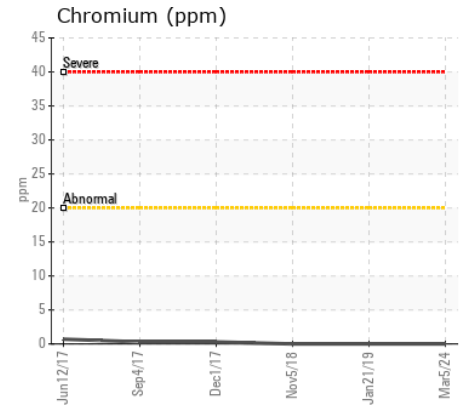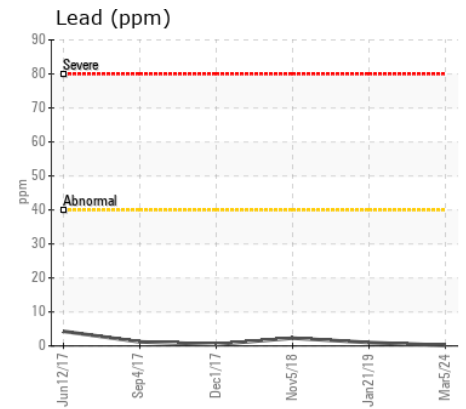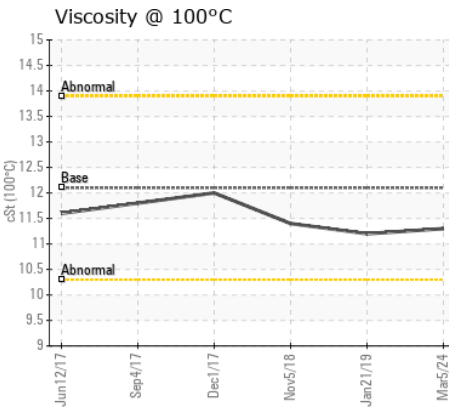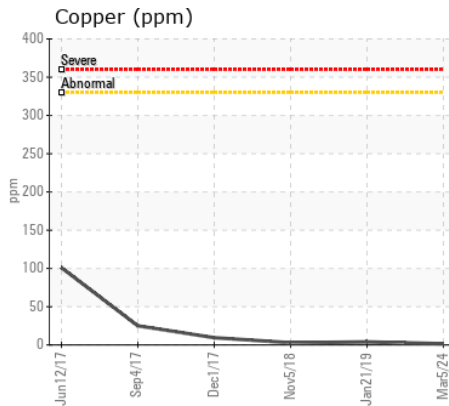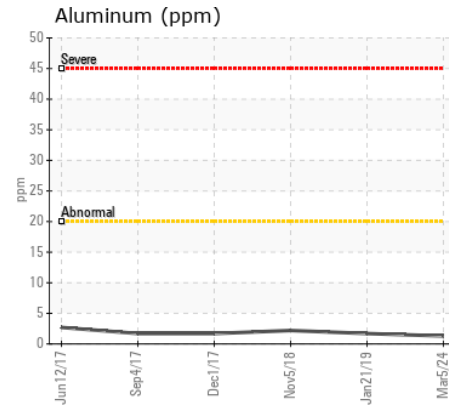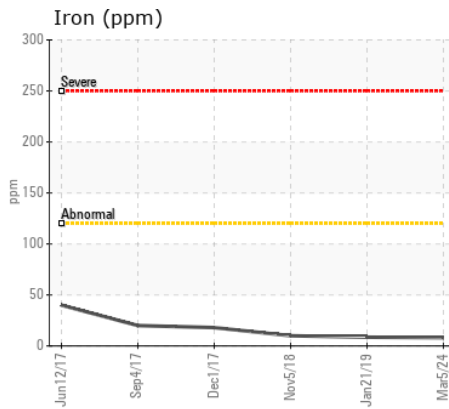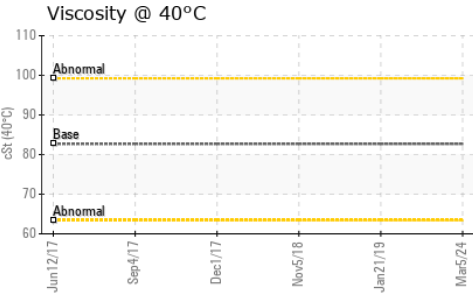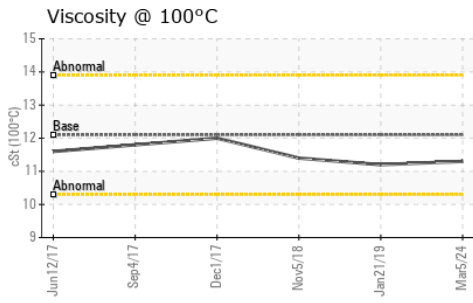

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0071312
Lab Number : 02620119
Unique Number : 5737229
Test Package : MOB 1 (Additional Tests: KV40, VI)

Received : 06 Mar 2024
Tested : 06 Mar 2024
Diagnosed : 06 Mar 2024 - Wes Davis

Wasteco
 161 Bridgeland Ave.
 Toronto, ON
 CA M6A 1Z1
 Contact: Steve Andrade
 sandrade@wasteco.com
 T: (416)787-5000
 F: (416)787-6210

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.