



VOLVO

OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[394678]

Machine Id
16-8009

Component
Transmission (Auto)

Fluid
VOLVO AUTOMATIC TRANSMISSION FLUID AT102 (--- GAL)

RECOMMENDATION

We recommend that you drain the fluid from the component if this has not already been done. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP393079	VCP394199	VCP380374
Sample Date		Client Info		09 Feb 2024	29 Oct 2023	23 Aug 2023
Machine Age	hrs	Client Info		10487	10000	9495
Oil Age	hrs	Client Info		2500	2000	1500
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Not Changed
Filter Changed		Client Info		Not Changed	Not Changed	Not Changed
Sample Status				ABNORMAL	ABNORMAL	ABNORMAL

WEAR

Iron ppm levels are abnormal. The low ferrous density (PQ) index indicates the wear metal levels are due to corrosion.

PQ		ASTM D8184*	>60	7	10	0
Iron	ppm	ASTM D5185(m)	>140	▲ 221	▲ 192	▲ 154
Chromium	ppm	ASTM D5185(m)	>2	<1	<1	<1
Nickel	ppm	ASTM D5185(m)	>2	<1	<1	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>10	3	2	3
Lead	ppm	ASTM D5185(m)	>20	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>100	8	8	8
Tin	ppm	ASTM D5185(m)	>2	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION

There is no indication of any contamination in the fluid.


Silicon	ppm	ASTM D5185(m)	>20	8	8	8
Potassium	ppm	ASTM D5185(m)	>20	2	1	2
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION


Additive levels indicate the addition of a different brand, or type of fluid. The fluid is no longer serviceable as a result of the abnormal and/or severe wear.

Sodium	ppm	ASTM D5185(m)		4	3	4
Boron	ppm	ASTM D5185(m)	187	54	59	54
Barium	ppm	ASTM D5185(m)	0.0	3	4	3
Molybdenum	ppm	ASTM D5185(m)	0.0	0	0	0
Manganese	ppm	ASTM D5185(m)	0.0	8	7	6
Magnesium	ppm	ASTM D5185(m)	6.8	1	<1	1
Calcium	ppm	ASTM D5185(m)	215	69	67	90
Phosphorus	ppm	ASTM D5185(m)	445	175	176	191
Zinc	ppm	ASTM D5185(m)	56	16	15	25
Sulfur	ppm	ASTM D5185(m)	1336	1603	1551	1515
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	27.4	27.4	27.5


▲ Ferrous Alloys

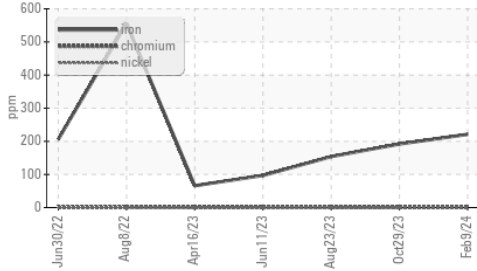


▲ Iron (ppm)

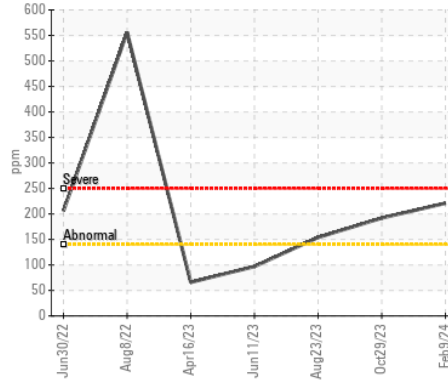


Lead (ppm)

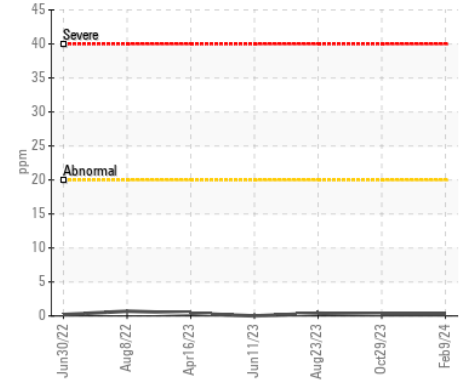


Viscosity @ 40°C

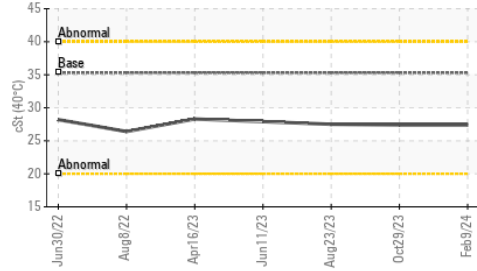


Aluminum (ppm)

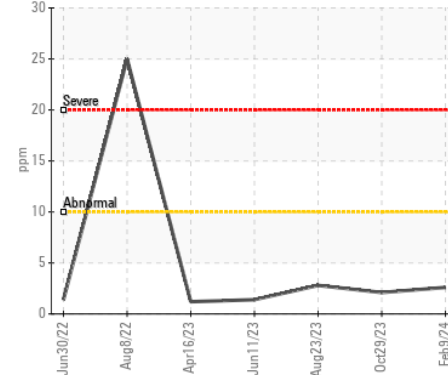


Chromium (ppm)

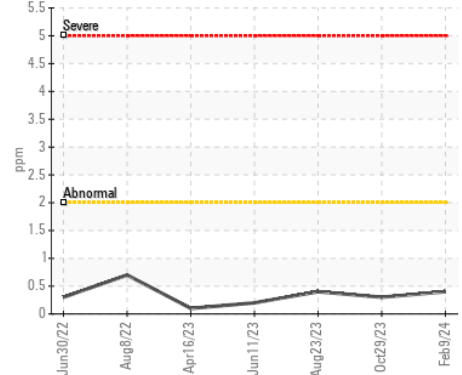


PQ

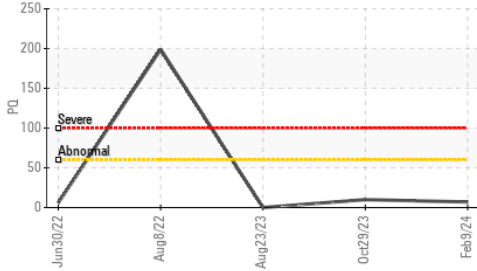


Copper (ppm)

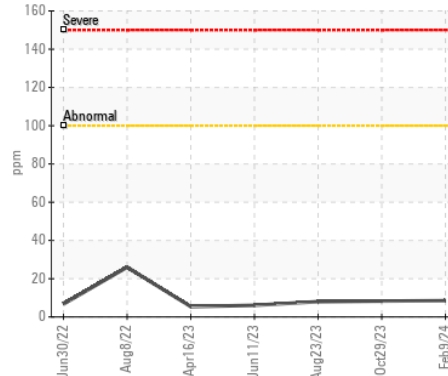


Silicon (ppm)

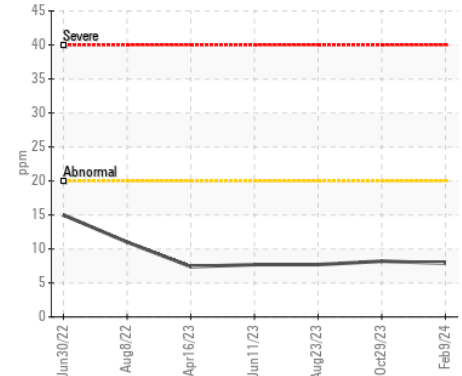


Additives

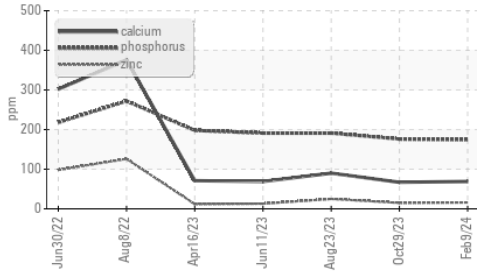

Viscosity @ 40°C

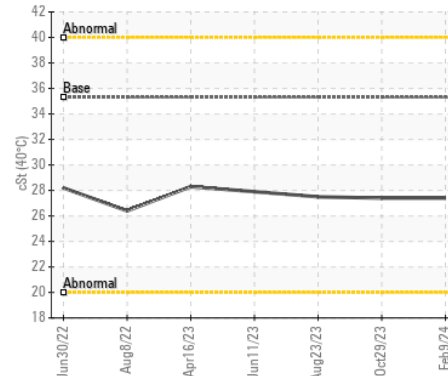

PQ

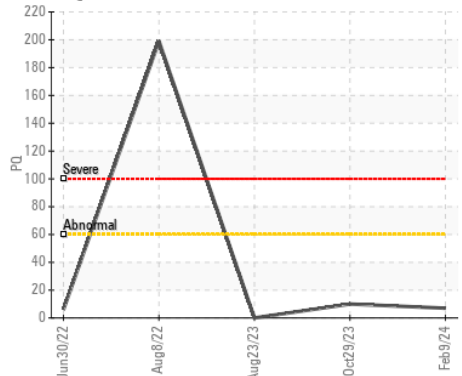

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP393079
Lab Number : 02620235
Unique Number : 5737345
Test Package : MOB 1 (Additional Tests: PQ)

Received : 06 Mar 2024
Tested : 06 Mar 2024
Diagnosed : 06 Mar 2024 - Kevin Marson

CRH CANADA GROUP INC.
 P.O. BOX 5400
 CONCORD, ON
 CA L4K 1B6
 Contact: Dan Brown
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: