

Machine Id
911054
Component
Transmission (Auto)
Fluid
DEXRON III (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqua que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer. Veuillez préciser la marque et le modèle du composant lors du prochain échantillon.

WEAR

Les taux d'usure de tous les composants sont normaux.










CONTAMINATION

Il n'y a aucun indice de contamination dans le fluide.

FLUID CONDITION

L'état de le fluide est acceptable pour la durée de service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0110476	GFL0097427	GFL0097413
Sample Date		Client Info		23 Feb 2024	04 Jan 2024	03 Oct 2023
Machine Age	hrs	Client Info		2110	1783	1287
Oil Age	hrs	Client Info		2110	1783	1287
Filter Age	hrs	Client Info		2110	1783	1287
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL
Iron	ppm	ASTM D5185(m)	>160	50	112	97
Chromium	ppm	ASTM D5185(m)	>5	0	<1	0
Nickel	ppm	ASTM D5185(m)	>5	<1	1	1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	<1
Aluminum	ppm	ASTM D5185(m)	>50	10	21	20
Lead	ppm	ASTM D5185(m)	>50	29	▲ 83	▲ 71
Copper	ppm	ASTM D5185(m)	>225	41	110	85
Tin	ppm	ASTM D5185(m)	>10	1	4	4
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Silicon	ppm	ASTM D5185(m)	>20	5	5	8
Potassium	ppm	ASTM D5185(m)	>20	2	7	5
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	VLITE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	VLITE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG
Sodium	ppm	ASTM D5185(m)		4	12	11
Boron	ppm	ASTM D5185(m)		102	153	165
Barium	ppm	ASTM D5185(m)		0	<1	<1
Molybdenum	ppm	ASTM D5185(m)		0	<1	<1
Manganese	ppm	ASTM D5185(m)		<1	1	1
Magnesium	ppm	ASTM D5185(m)		<1	1	<1
Calcium	ppm	ASTM D5185(m)		124	119	123
Phosphorus	ppm	ASTM D5185(m)		290	414	424
Zinc	ppm	ASTM D5185(m)		3	6	6
Sulfur	ppm	ASTM D5185(m)		1790	2057	2045
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	34.0	34.1	34.2

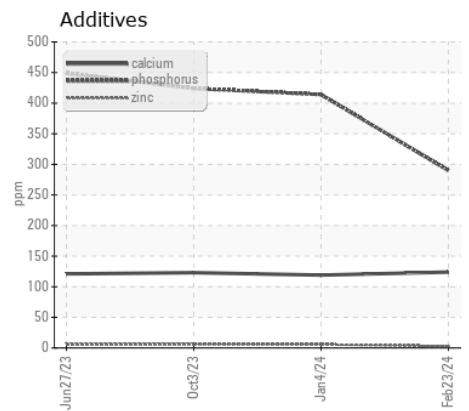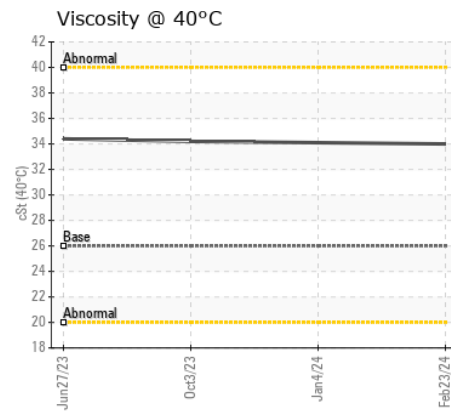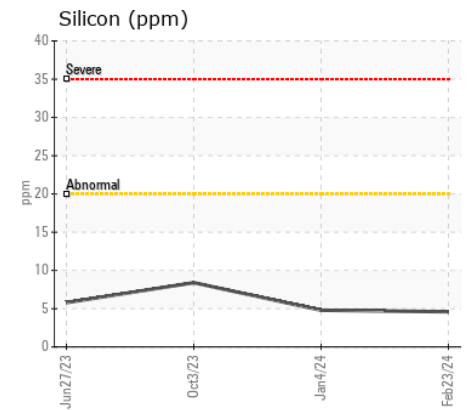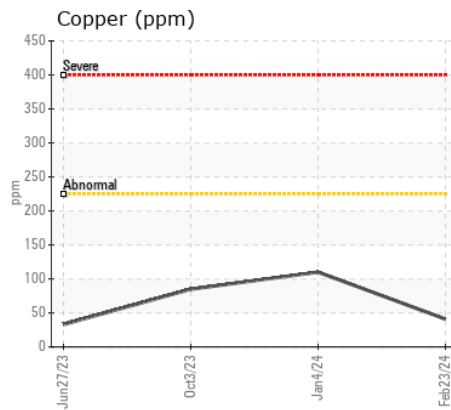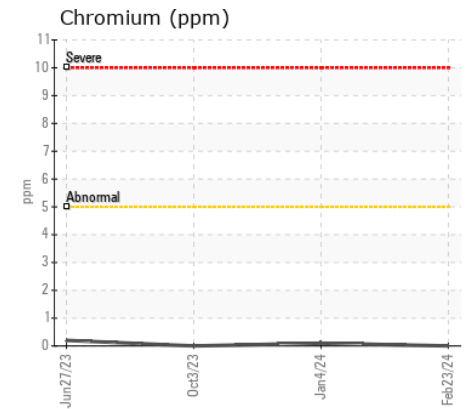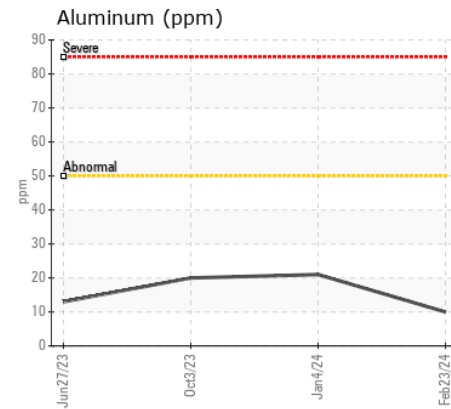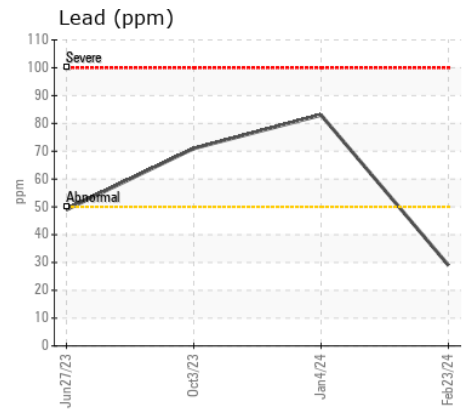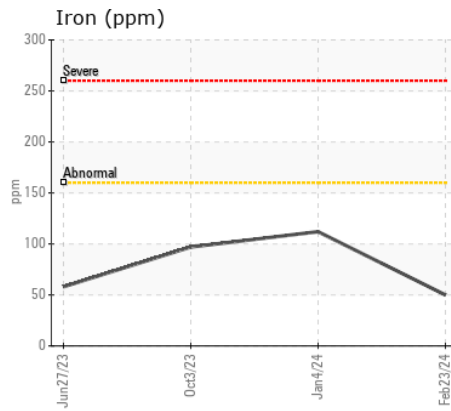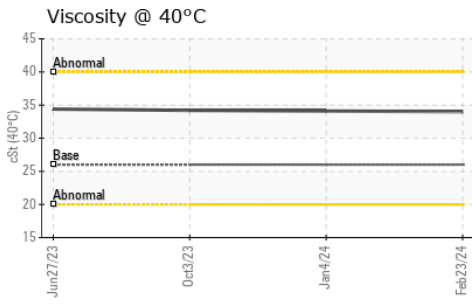

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0110476
Lab Number : 02620240
Unique Number : 5737350
Test Package : MOB 1
Received : 06 Mar 2024
Tested : 06 Mar 2024
Diagnosed : 06 Mar 2024 - Wes Davis

GFL Environmental - 732 - Beauce - Hauling - Solid Waste
 139, 181 Street,
 Beauceville, QC
 CA G5X 2S9
 Contact: Sandrine Duval
 sduval@matrec.ca
 T: (418)774-5275
 F: (418)774-5292

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.