



OIL ANALYSIS REPORT

WEAR	ABNORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
CASE 721D JEE136729
Component
Rear Axle
Fluid
{not provided} (--- GAL)

RECOMMENDATION

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition. Please specify the brand, type, and viscosity of the oil on your next sample.

WEAR

PQ levels are abnormal. Chromium and iron ppm levels are abnormal. Gear wear is indicated. The high ferrous density (PQ) index indicates that abnormal wear is occurring.













CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The oil is no longer serviceable as a result of the abnormal and/or severe wear.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0910050	---	---
Sample Date		Client Info		05 Mar 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				ABNORMAL	---	---
PQ		ASTM D8184*		▲ 976	---	---
Iron	ppm	ASTM D5185(m)	>500	▲ 2269	---	---
Chromium	ppm	ASTM D5185(m)	>10	▲ 17	---	---
Nickel	ppm	ASTM D5185(m)	>10	2	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	7	---	---
Lead	ppm	ASTM D5185(m)	>25	<1	---	---
Copper	ppm	ASTM D5185(m)	>50	22	---	---
Tin	ppm	ASTM D5185(m)	>10	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	LIGHT	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>75	40	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)		7	---	---
Boron	ppm	ASTM D5185(m)		12	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		28	---	---
Manganese	ppm	ASTM D5185(m)		20	---	---
Magnesium	ppm	ASTM D5185(m)		44	---	---
Calcium	ppm	ASTM D5185(m)		1414	---	---
Phosphorus	ppm	ASTM D5185(m)		919	---	---
Zinc	ppm	ASTM D5185(m)		665	---	---
Sulfur	ppm	ASTM D5185(m)		8485	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		1.23	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		171	---	---

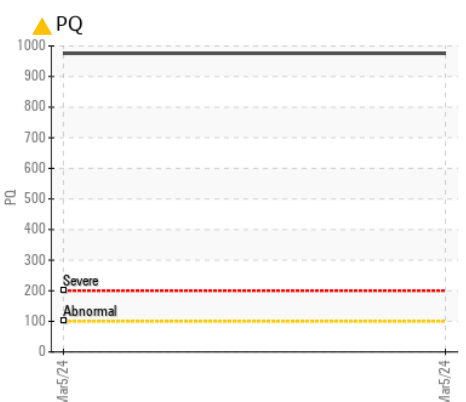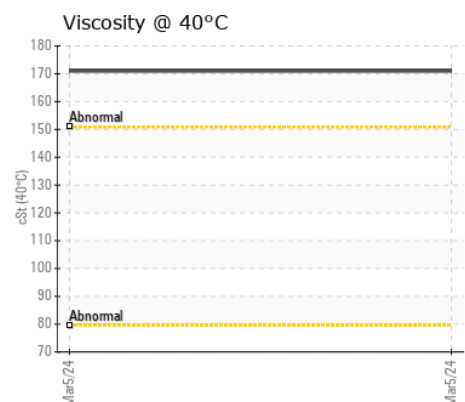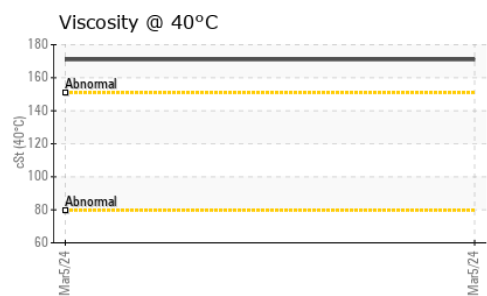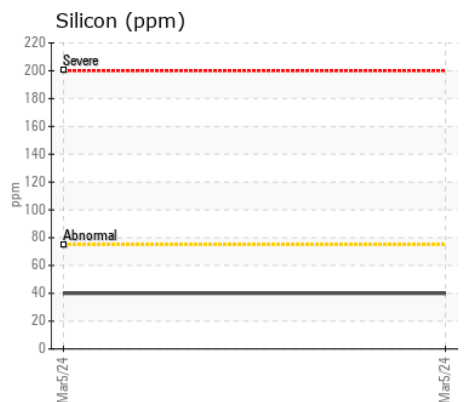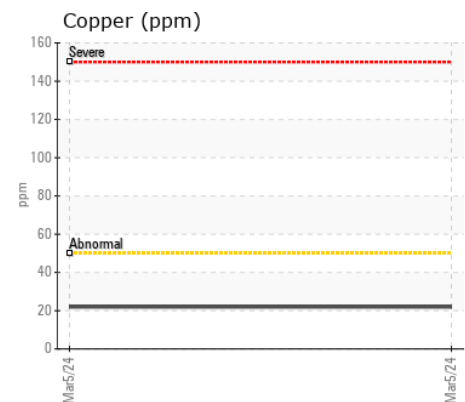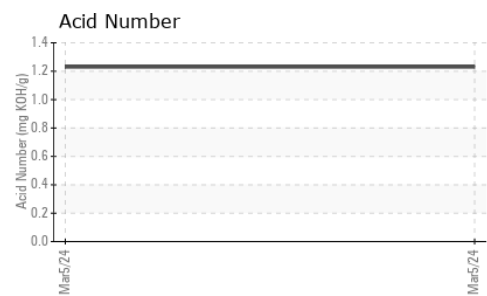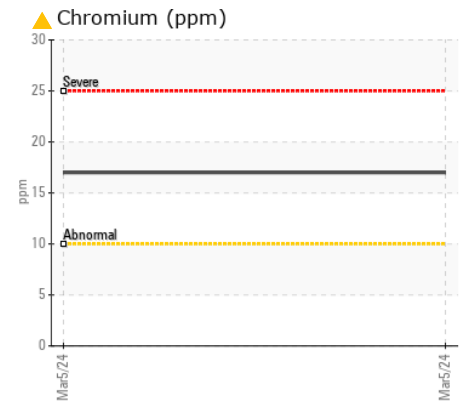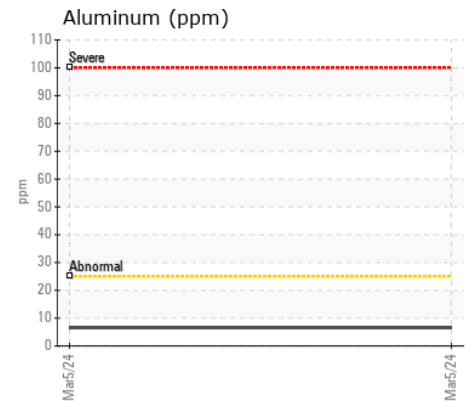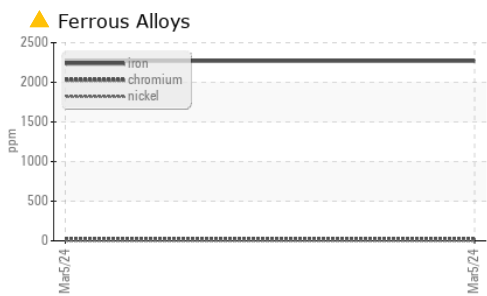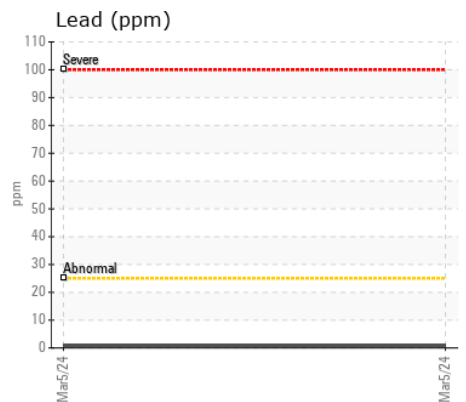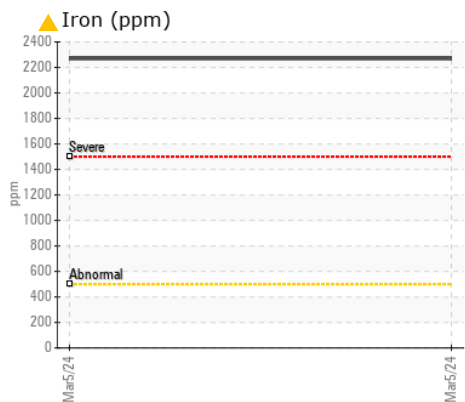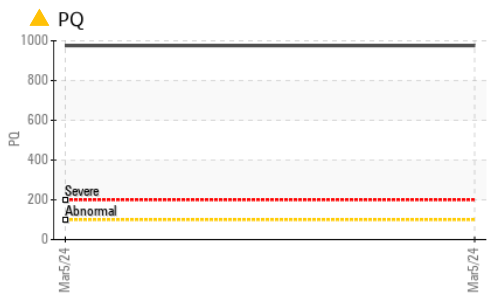

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0910050 **Received** : 06 Mar 2024
Lab Number : 02620246 **Tested** : 06 Mar 2024
Unique Number : 5737356 **Diagnosed** : 06 Mar 2024 - Kevin Marson
Test Package : MOB 2 (Additional Tests: PQ, TAN Man)

STRONGCO EQUIPMENT
 1075 CLARK BOULEVARD
 BRAMPTON, ON
 CA L6T 3W4
 Contact: Demitri Rjevskii
 drjevskii@strongco.com
 T: (647)218-3575
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.