



VOLVO PENTA

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[19624]
 Machine Id
3194008156
 Component
Port IPS
 Fluid
GEAR OIL SAE 75W90 (17 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 75W90. Please confirm.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VPA056523	---	---
Sample Date		Client Info		04 Mar 2024	---	---
Machine Age	hrs	Client Info		1900	---	---
Oil Age	hrs	Client Info		50	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

PQ		ASTM D8184*		0	---	---
Iron	ppm	ASTM D5185(m)	>200	83	---	---
Chromium	ppm	ASTM D5185(m)	>10	<1	---	---
Nickel	ppm	ASTM D5185(m)	>10	1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)		2	---	---
Lead	ppm	ASTM D5185(m)		<1	---	---
Copper	ppm	ASTM D5185(m)		4	---	---
Tin	ppm	ASTM D5185(m)		0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)		5	---	---
Potassium	ppm	ASTM D5185(m)	>20	1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		6	---	---
Boron	ppm	ASTM D5185(m)	400	272	---	---
Barium	ppm	ASTM D5185(m)	200	0	---	---
Molybdenum	ppm	ASTM D5185(m)	12	<1	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)	12	2	---	---
Calcium	ppm	ASTM D5185(m)	150	7	---	---
Phosphorus	ppm	ASTM D5185(m)	1650	1387	---	---
Zinc	ppm	ASTM D5185(m)	125	10	---	---
Sulfur	ppm	ASTM D5185(m)	22500	22841	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	109	105	---	---

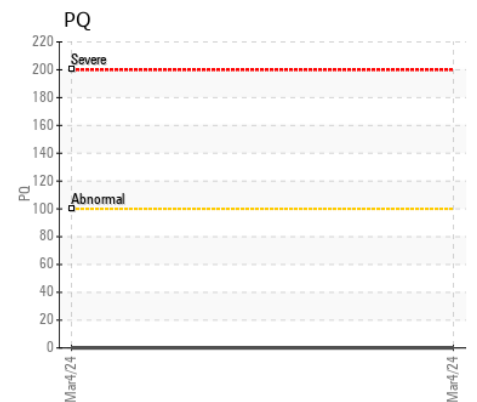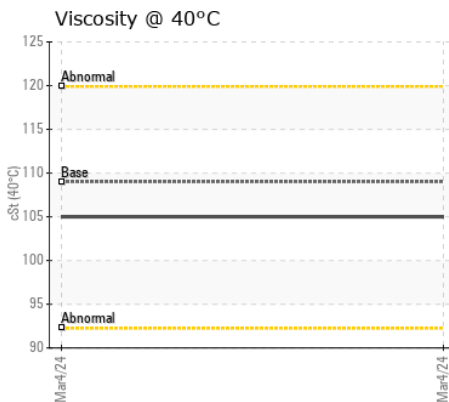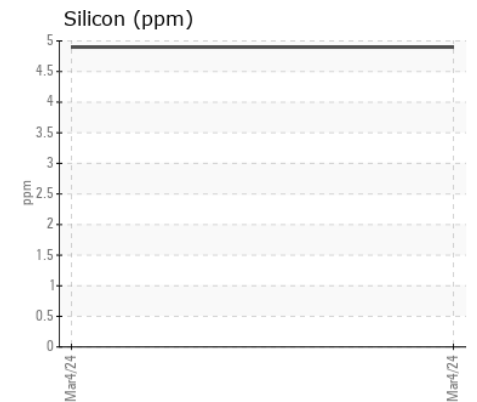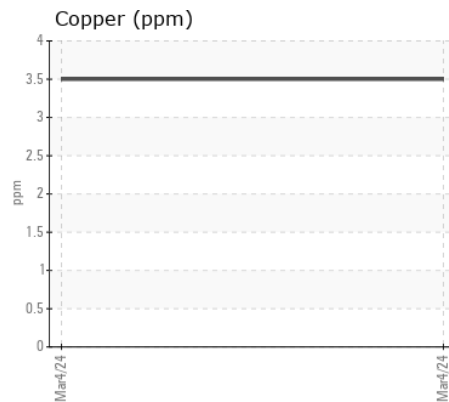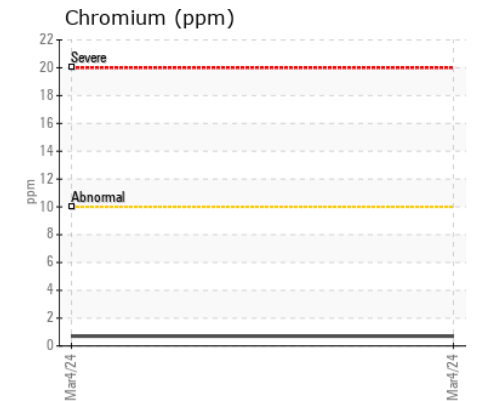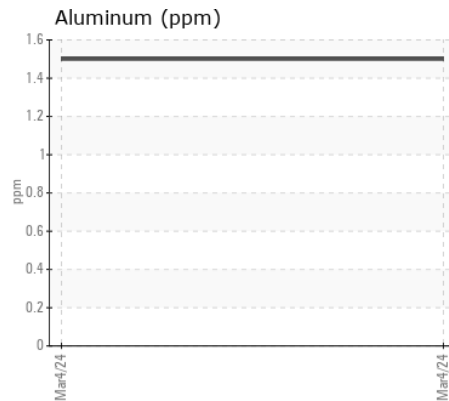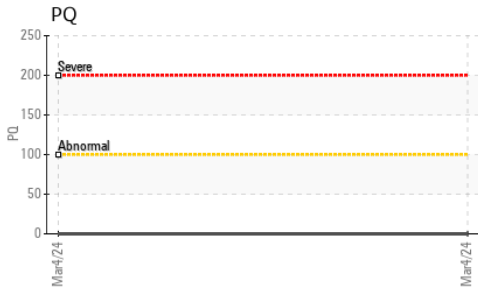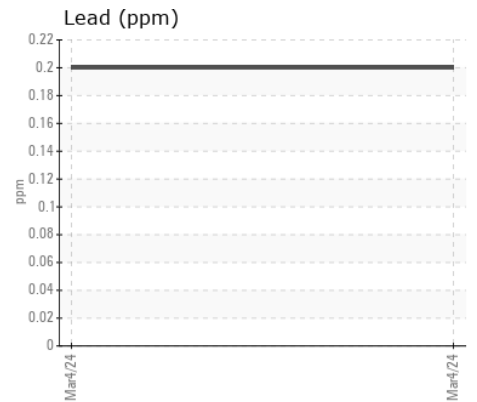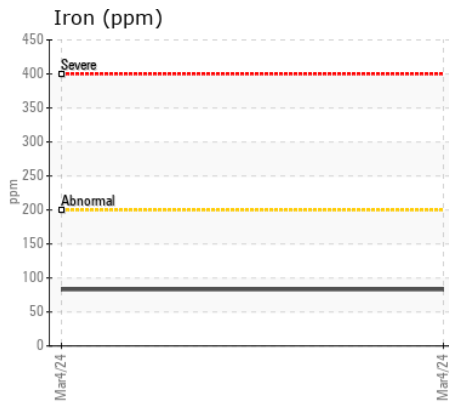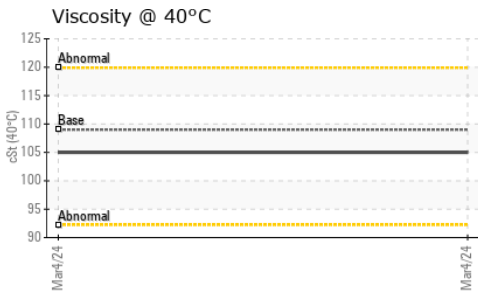

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VPA056523 **Received** : 06 Mar 2024
Lab Number : 02620248 **Tested** : 06 Mar 2024
Unique Number : 5737358 **Diagnosed** : 06 Mar 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: PQ)

Sea Power Ltd
 2077 Amelia Ave
 SIDNEY, BC
 CA V8L 3Z8
 Contact: Kayla Sousa
 service@seapower.ca
 T: (250)656-4341
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.