



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**[396610]**  
Machine Id  
**16-8020**  
Component  
**Rear Axle**  
Fluid  
**VOLVO WB 102 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP392834</b>	VCP353127	VCP353383
Sample Date		Client Info		<b>02 Mar 2024</b>	01 Aug 2023	09 Mar 2023
Machine Age	hrs	Client Info		<b>10000</b>	9019	7985
Oil Age	hrs	Client Info		<b>2000</b>	1000	4000
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Filter Changed		Client Info		<b>Not Chngd</b>	Not Chngd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	<b>39</b>	15	62
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	2
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)		<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>30	<b>2</b>	1	1
Lead	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185(m)	>120	<b>2</b>	<1	4
Tin	ppm	ASTM D5185(m)	>20	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	<b>16</b>	13	11
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	2
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>1</b>	2	9
Boron	ppm	ASTM D5185(m)		<b>113</b>	119	121
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	2
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185(m)		<b>14</b>	13	13
Calcium	ppm	ASTM D5185(m)		<b>3919</b>	4041	4295
Phosphorus	ppm	ASTM D5185(m)		<b>1258</b>	1391	1428
Zinc	ppm	ASTM D5185(m)		<b>1534</b>	1604	1690
Sulfur	ppm	ASTM D5185(m)		<b>3411</b>	3520	3964
Visc @ 40°C	cSt	ASTM D7279(m)		<b>41.4</b>	42.5	39.2

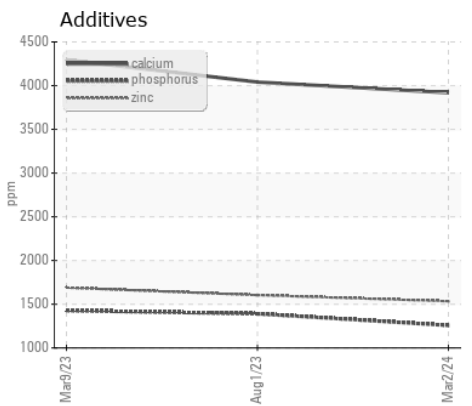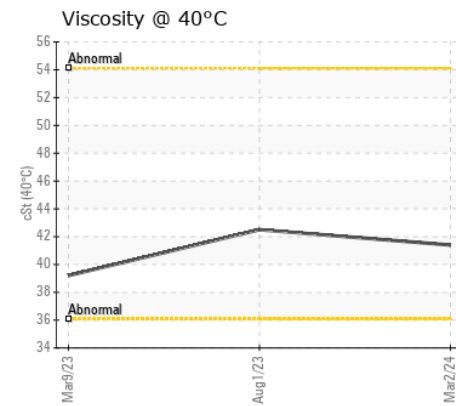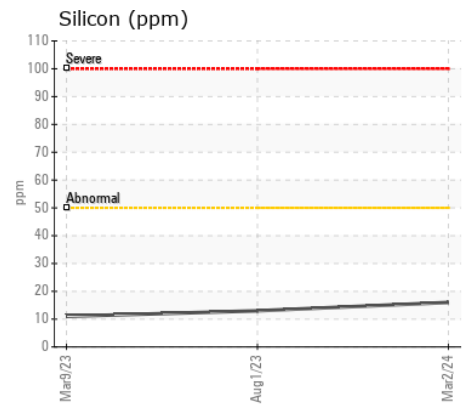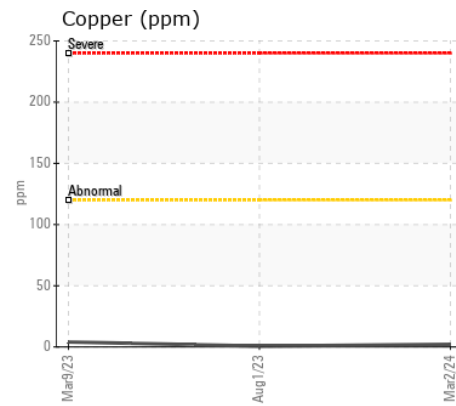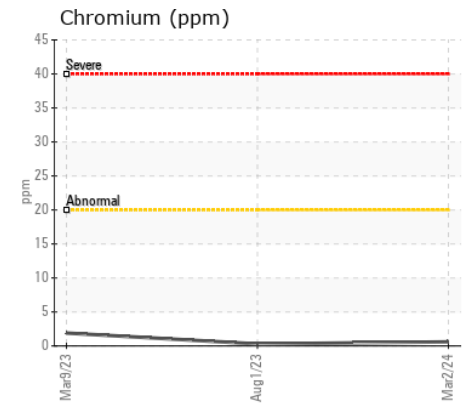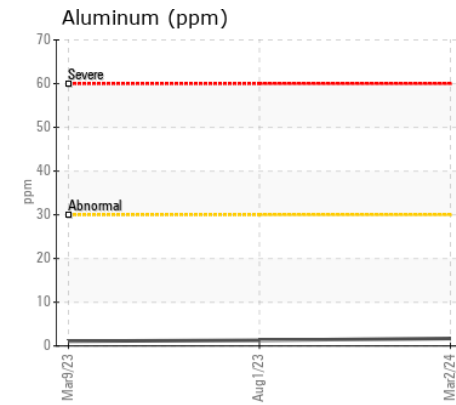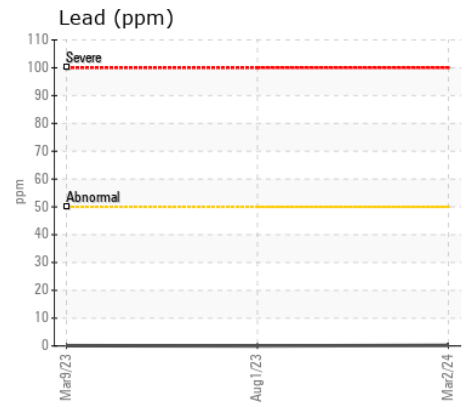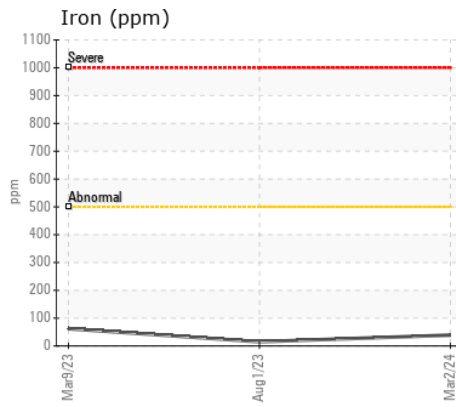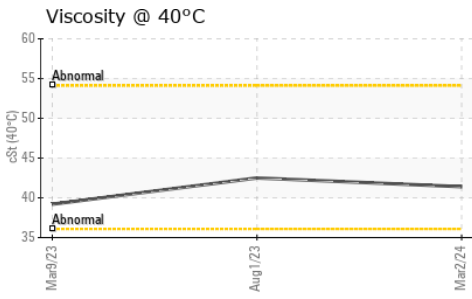

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP392834 **Received** : 06 Mar 2024  
**Lab Number** : 02620259 **Tested** : 06 Mar 2024  
**Unique Number** : 5737369 **Diagnosed** : 06 Mar 2024 - Wes Davis  
**Test Package** : MOB 1

**CRH CANADA GROUP INC.**  
 P.O. BOX 5400  
 CONCORD, ON  
 CA L4K 1B6  
 Contact: Dan Brown  
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: