

Machine Id **C-71** Component **Differential** Fluid **GEAR OIL SAE 80W90 (--- GAL)**

RECOMMENDATION

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) GEAR OIL SAE 80W90. Please confirm. Please specify the component make and model with your next sample.

WEAR

All component wear rates are normal.

CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Report Id: FRAORL [WCAMIS] 02620266 (Generated: 03/06/2024 16:40:31) Rev: 1

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		CU0021035		
Sample Date		Client Info		22 Feb 2024		
Machine Age	hrs	Client Info		5601		
Oil Age	hrs	Client Info		50		
Filter Age	hrs	Client Info		0		
Oil Changed		Client Info		Not Changd		
Filter Changed		Client Info		Not Changd		
Sample Status				NORMAL		
			500			
Iron	ppm	ASTM D5185(m)	>500	47		
Chromium	ppm	ASTM D5185(m)	>10	<1		
Nickel	ppm	ASTM D5185(m)	>10	<1		
Titanium	ppm	ASTM D5185(m)		0		
Silver	ppm	ASTM D5185(m)	05	0		
Aluminum	ppm	ASTM D5185(m)	>25	2		
Lead	ppm	ASTM D5185(m)	>25	<1		
Copper	ppm	ASTM D5185(m)	>100	<1		
Tin	ppm	ASTM D5185(m)	>10	0		
Vanadium	ppm	ASTM D5185(m)		0		
White Metal	scalar	Visual*	NONE	NONE		
Yellow Metal	scalar	Visual*	NONE	NONE		
Silicon	ppm	ASTM D5185(m)	>75	12		
Potassium	ppm	ASTM D5185(m)	>20	1		
Water	ppm	WC Method	>.2	NEG		
Silt	scalar	Visual*	NONE	NONE		
Debris	scalar	Visual*	NONE	NONE		
Sand/Dirt	scalar	Visual*	NONE	NONE		
Appearance	scalar	Visual*	NORMI	NORML		
Odor	scalar	Visual*	NORML	NORML		
Emulsified Water	scalar	Visual*	>.2	NEG		
Sodium	ppm	ASTM D5185(m)	>170	10		
Boron	ppm	ASTM D5185(m)	400	210		
Barium	ppm	ASTM D5185(m)	200	31		
Molybdenum	ppm	ASTM D5185(m)	12	0		
Manganese	ppm	ASTM D5185(m)		<1		
Magnesium	ppm	ASTM D5185(m)	12	2		
Calcium	ppm	ASTM D5185(m)	150	19		
Phosphorus	ppm	ASTM D5185(m)	1650	995		
Filosphorus						
Zinc	ppm	ASTM D5185(m)	125	14		
•	ppm ppm	ASTM D5185(m) ASTM D5185(m)	125 22500	14 19472		
Zinc						
Zinc Sulfur	ppm	ASTM D5185(m)	22500	19472		

WEAR

CONTAMINATION

FLUID CONDITION


NORMAL


NORMAL

NORMAL

102

Viscosity Index (VI) Scale ASTM D2270* 117



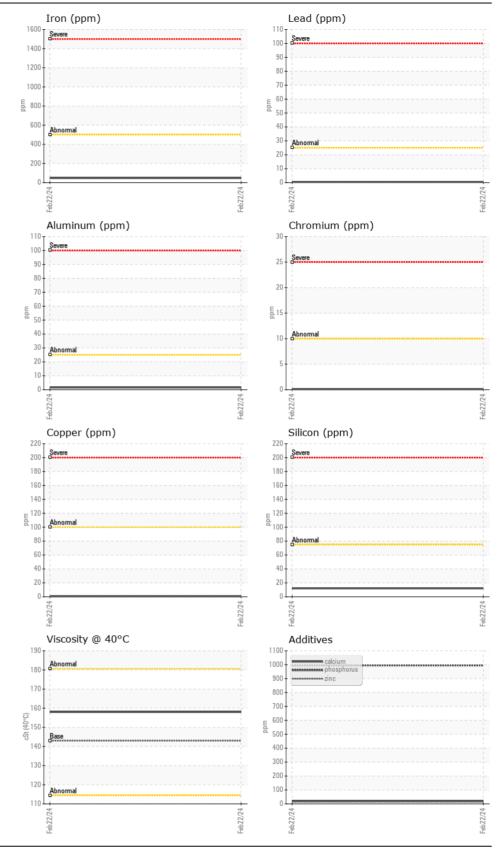

FRANCOIS JUNEAU Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 CALA Sample No. Received : 06 Mar 2024 6135 PL MONTPELIER : CU0021035 Lab Number : 02620266 Tested ORLEANS, ON :06 Mar 2024 ISO 17025:2017 Accredited : 06 Mar 2024 - Kevin Marson CA K1W 1J1 Unique Number : 5737376 Diagnosed Laboratory Test Package : MOB 1 (Additional Tests: KV100, VI) Contact: Francois Juneau To discuss this sample report, contact Customer Service at 1-800-268-2131. francoisjuneau@hotmail.com T: (613)619-1256 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab. F: Validity of results and interpretation are based on the sample and information as supplied.