



# VOLVO

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Area  
**OCEAN [8000397067]**

Machine Id  
**VOLVO L150H 7293**

Component  
**Diesel Engine**

Fluid  
**VOLVO ULTRA DIESEL ENGINE OIL 15W40 VDS-3 (--- GAL)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>VCP394215</b>	VCP449417	---
Sample Date		Client Info		<b>05 Mar 2024</b>	13 Dec 2023	---
Machine Age	hrs	Client Info		<b>1045</b>	535	---
Oil Age	hrs	Client Info		<b>500</b>	500	---
Filter Age	hrs	Client Info		<b>500</b>	0	---
Oil Changed		Client Info		<b>Changed</b>	N/A	---
Filter Changed		Client Info		<b>Changed</b>	N/A	---
Sample Status				<b>NORMAL</b>	NORMAL	---

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>6</b>	11	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185(m)	>10	<b>2</b>	3	---
Lead	ppm	ASTM D5185(m)	>20	<b>3</b>	12	---
Copper	ppm	ASTM D5185(m)	>15	<b>130</b>	452	---
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	2	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	---

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>20	<b>10</b>	26	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	4	---
Fuel		WC Method	>6.0	<b>&lt;1.0</b>	0.6	---
Water		WC Method	>0.1	<b>NEG</b>	NEG	---
Glycol		WC Method		<b>NEG</b>	NEG	---
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.8</b>	9.3	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>23.0</b>	19.1	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	---

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>2</b>	3	---
Boron	ppm	ASTM D5185(m)	2.5	<b>42</b>	44	---
Barium	ppm	ASTM D5185(m)	0.0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185(m)	0.7	<b>47</b>	83	---
Manganese	ppm	ASTM D5185(m)	0.0	<b>&lt;1</b>	2	---
Magnesium	ppm	ASTM D5185(m)	256	<b>403</b>	20	---
Calcium	ppm	ASTM D5185(m)	2057	<b>1803</b>	2221	---
Phosphorus	ppm	ASTM D5185(m)	935	<b>934</b>	999	---
Zinc	ppm	ASTM D5185(m)	1223	<b>1075</b>	1148	---
Sulfur	ppm	ASTM D5185(m)	4079	<b>2642</b>	3416	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>20.0</b>	14.7	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.0	<b>12.3</b>	11.1	---

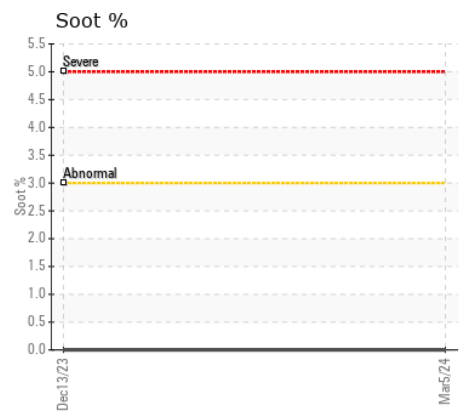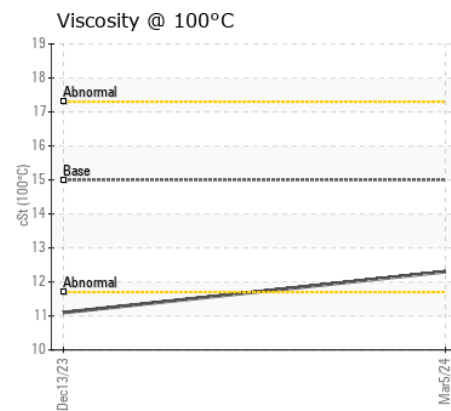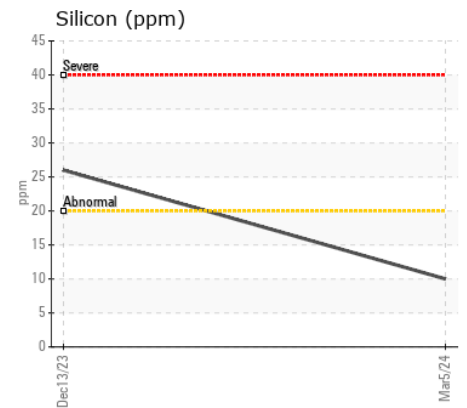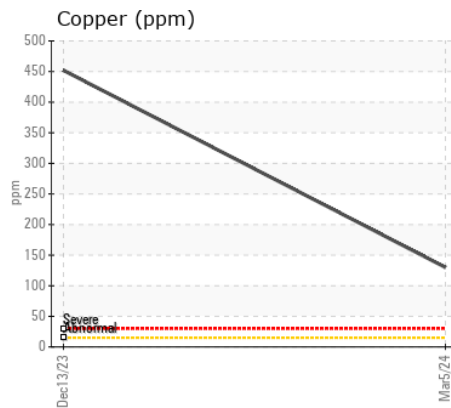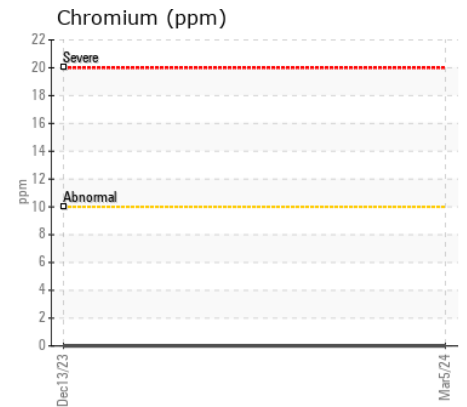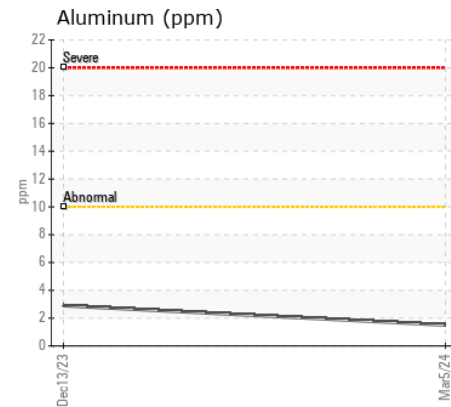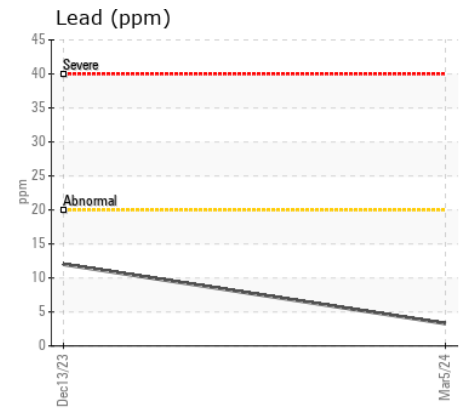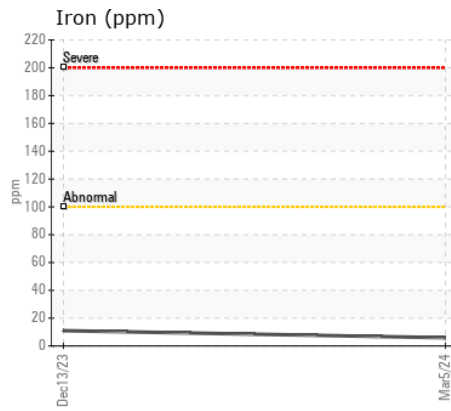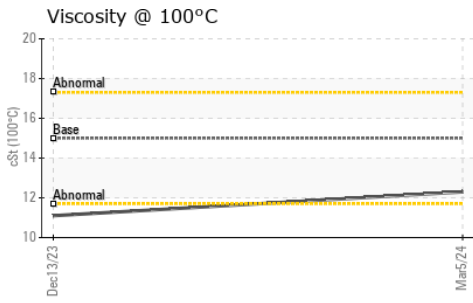

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : VCP394215 **Received** : 07 Mar 2024  
**Lab Number** : 02620410 **Tested** : 07 Mar 2024  
**Unique Number** : 5737520 **Diagnosed** : 07 Mar 2024 - Wes Davis  
**Test Package** : MOB 1

**STRONGCO EQUIPMENT INC.**  
 55 ISNOR DRIVE, BURNSIDE INDUSTRIAL PARK  
 DARTMOUTH, NS  
 CA B3B 1N6  
 Contact: Lindsay Downs  
 ldowns@strongco.com  
 T: (902)468-5010  
 F: (902)468-2468

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.