



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**731023**  
Component  
**Natural Gas Engine**  
Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

**RECOMMENDATION**

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0100723</b>	GFL0079575	GFL0041665
Sample Date		Client Info		<b>05 Mar 2024</b>	08 Aug 2023	10 Aug 2022
Machine Age	kms	Client Info		<b>99116</b>	99116	2268
Oil Age	kms	Client Info		<b>99116</b>	0	2268
Filter Age	kms	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>N/A</b>	Changed	N/A
Filter Changed		Client Info		<b>N/A</b>	Changed	N/A
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>50	<b>13</b>	28	23
Chromium	ppm	ASTM D5185(m)	>4	<b>2</b>	4	2
Nickel	ppm	ASTM D5185(m)	>2	<b>1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>9	<b>2</b>	2	2
Lead	ppm	ASTM D5185(m)	>30	<b>4</b>	1	1
Copper	ppm	ASTM D5185(m)	>35	<b>2</b>	3	2
Tin	ppm	ASTM D5185(m)	>4	<b>1</b>	1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**











There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>+100	<b>4</b>	14	5
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	10	<1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>---</b>	0.0	---
Soot %	%	ASTM D7844*		<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>12.6</b>	11.1	11.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>26.7</b>	24.5	25.9
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

Additive levels indicate the addition of a different brand, or type of oil. The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>4</b>	4	4
Boron	ppm	ASTM D5185(m)	0	<b>9</b>	8	10
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>55</b>	54	58
Manganese	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	4	1
Magnesium	ppm	ASTM D5185(m)	1010	<b>563</b>	556	625
Calcium	ppm	ASTM D5185(m)	1070	<b>1741</b>	1534	1678
Phosphorus	ppm	ASTM D5185(m)	1150	<b>756</b>	718	805
Zinc	ppm	ASTM D5185(m)	1270	<b>952</b>	918	1006
Sulfur	ppm	ASTM D5185(m)	2060	<b>2157</b>	1984	2154
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>21.6</b>	19.5	21.0
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>14.8</b>	14.5	14.6

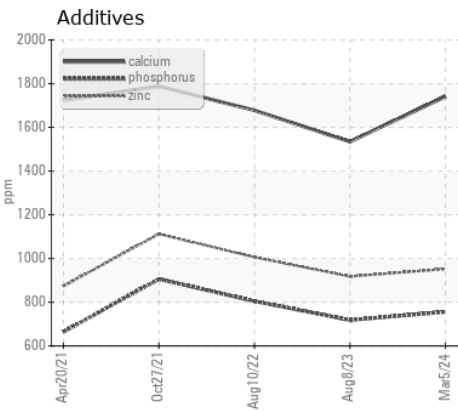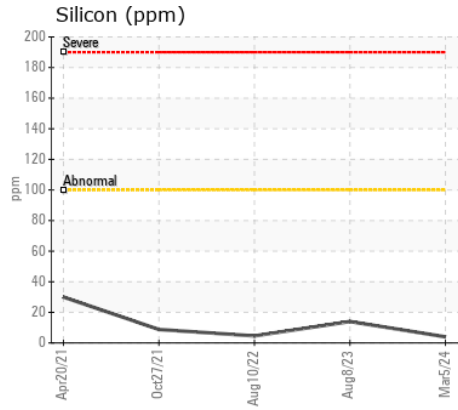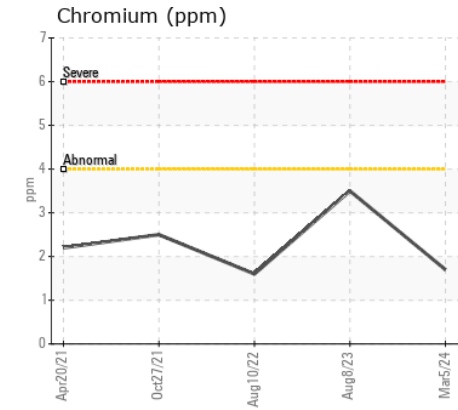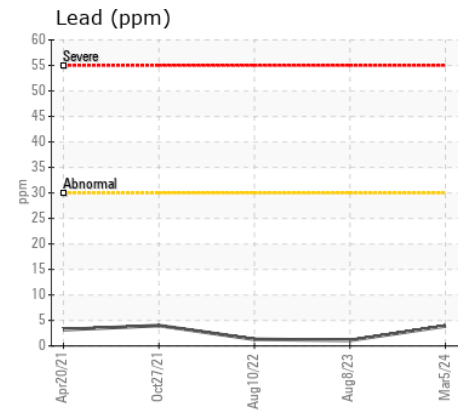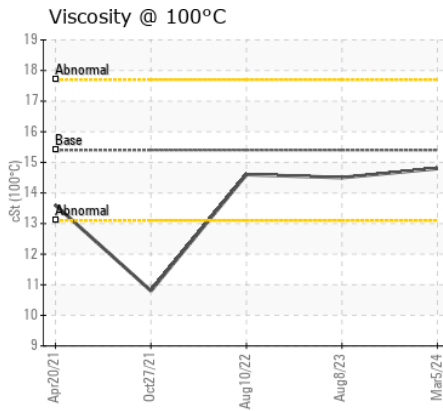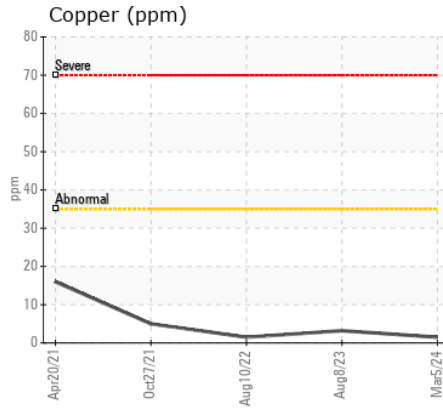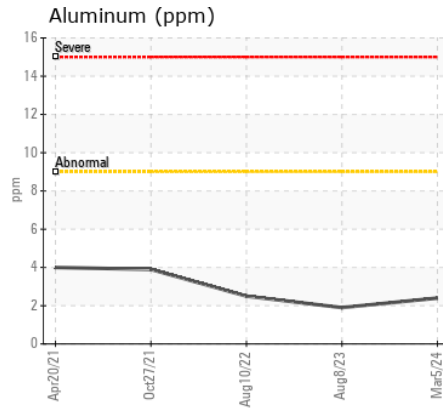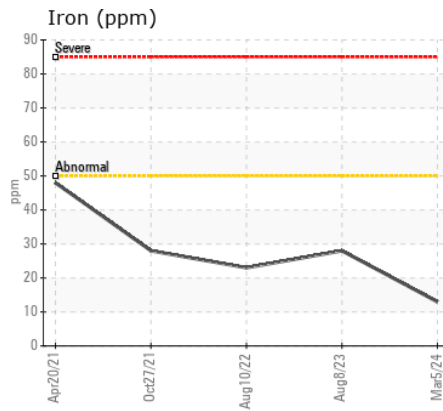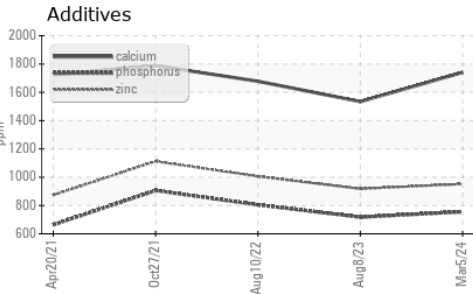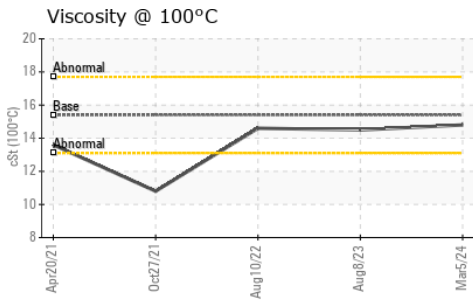

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0100723  
**Lab Number** : 02620429  
**Unique Number** : 5737539  
**Test Package** : MOB 1

**GFL Environmental - 277 - Niagara Regional**  
 C/O Metro Truck Niagara Inc., 411 Glendale Avenue  
 St. Catharines, ON  
 CA L2P 3Y1  
 Contact: Kelly Bremner  
 kbremner@gflenv.com  
 T: (437)235-6849  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.