



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
213 HARRY WALKER PKW PE6068T157100 PE6068T157100

Component
Rear Diesel Engine

Fluid
ESSO XD-3 EXTRA 15W40 (20 GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PN0005790	PN0002258	PN0000917
Sample Date		Client Info		04 Mar 2024	04 Mar 2021	06 Mar 2020
Machine Age	hrs	Client Info		265	191	163
Oil Age	hrs	Client Info		25	27	0
Filter Age	hrs	Client Info		25	27	0
Oil Changed		Client Info		Changed	Changed	Not Changd
Filter Changed		Client Info		Changed	Changed	Not Changd
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>51	2	3	6
Chromium	ppm	ASTM D5185(m)	>11	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	1
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>31	<1	2	3
Lead	ppm	ASTM D5185(m)	>26	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>26	<1	<1	1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	<1	<1

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>22	3	6	7
Potassium	ppm	ASTM D5185(m)	>20	<1	0	1
Fuel		WC Method	>2.1	<1.0	<1.0	<1.0
Water		WC Method	>0.21	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	5.0	7.0	7.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	17.6	17.8	23.9
Emulsified Water	scalar	Visual*	>0.21	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>192	1	3	2
Boron	ppm	ASTM D5185(m)		13	75	241
Barium	ppm	ASTM D5185(m)		0	0	<1
Molybdenum	ppm	ASTM D5185(m)		56	78	245
Manganese	ppm	ASTM D5185(m)		0	<1	<1
Magnesium	ppm	ASTM D5185(m)		821	130	828
Calcium	ppm	ASTM D5185(m)	3780	1163	1984	1367
Phosphorus	ppm	ASTM D5185(m)	1370	1018	928	884
Zinc	ppm	ASTM D5185(m)	1500	1148	1137	1010
Sulfur	ppm	ASTM D5185(m)	3800	2858	3239	2674
Oxidation	Abs/.1mm	ASTM D7414*	>25	13.1	12.9	16.2
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	14.2	14.1	14.7

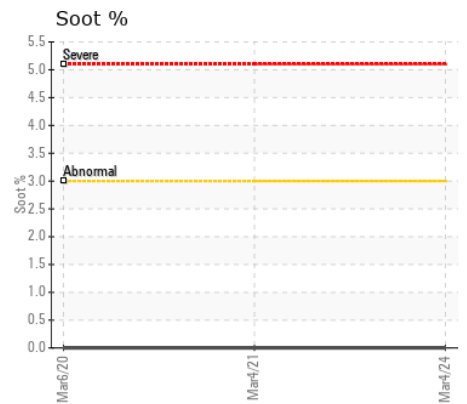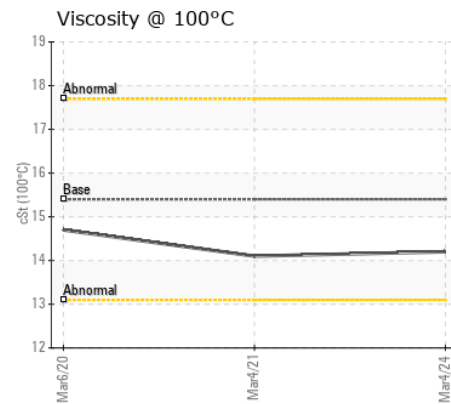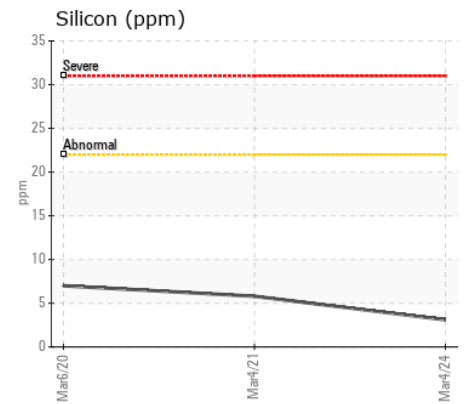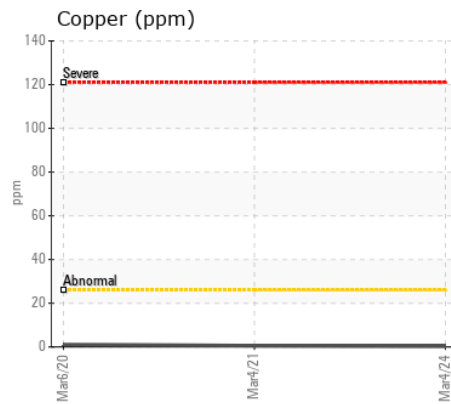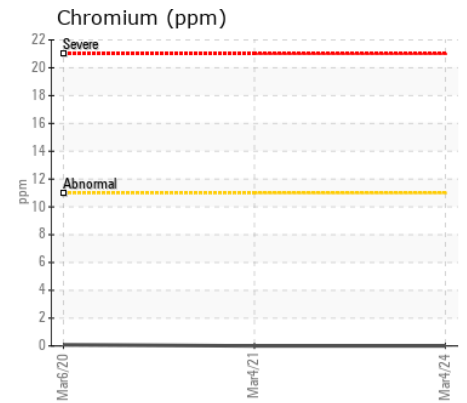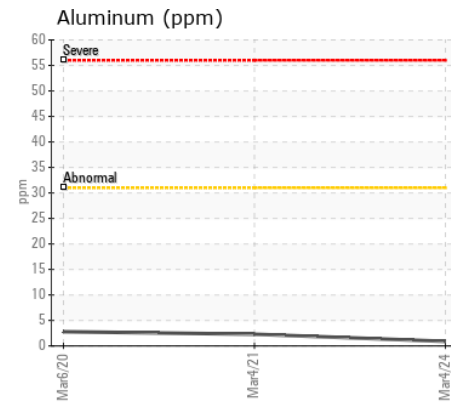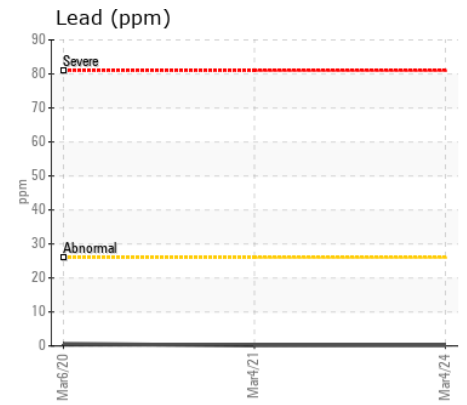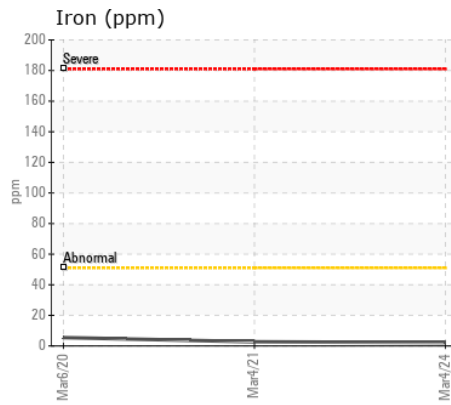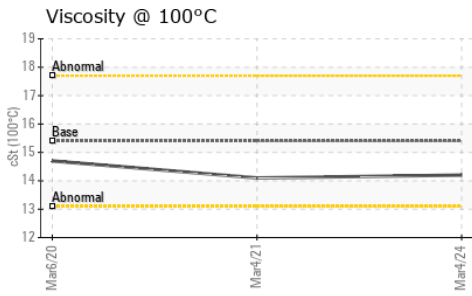

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PN0005790 **Received** : 07 Mar 2024
Lab Number : 02620453 **Tested** : 07 Mar 2024
Unique Number : 5737563 **Diagnosed** : 07 Mar 2024 - Wes Davis
Test Package : MOB 1

POWER STATION INC.
 1050 JAYSON COURT
 MISSISSAUGA, ON
 CA L4W 2V5
 Contact: Brett Kinkley
 Bkinkley@pwrstn.com
 T:
 F: (905)565-8544

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.