



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**317 MILL ST BEAVERTOWN, MOB 64-20131 NEXACOR U502977H**

Component  
**Rear Diesel Engine**

Fluid  
**ESSO XD-3 EXTRA 15W40 (8 LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PN0005792</b>	PN0004567	PN0295578
Sample Date		Client Info		<b>28 Feb 2024</b>	30 Jan 2023	04 Jun 2018
Machine Age	hrs	Client Info		<b>455</b>	351	326
Oil Age	hrs	Client Info		<b>4</b>	0	0
Filter Age	hrs	Client Info		<b>4</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

**WEAR**

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>250	<b>3</b>	2	3
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>35	<b>3</b>	2	<1
Lead	ppm	ASTM D5185(m)	>100	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185(m)	>60	<b>2</b>	<1	1
Tin	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>35	<b>6</b>	3	6
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1
Fuel		WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0</b>	0	0
Nitration	Abs/cm	ASTM D7624*	>20	<b>7.7</b>	6.5	5.8
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>17.3</b>	18.1	20.4
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>192	<b>2</b>	2	2
Boron	ppm	ASTM D5185(m)		<b>70</b>	72	43
Barium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>86</b>	13	42
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185(m)		<b>44</b>	73	564
Calcium	ppm	ASTM D5185(m)	3780	<b>2149</b>	2118	1488
Phosphorus	ppm	ASTM D5185(m)	1370	<b>1005</b>	1042	781
Zinc	ppm	ASTM D5185(m)	1500	<b>1128</b>	1084	928
Sulfur	ppm	ASTM D5185(m)	3800	<b>3302</b>	3451	2293
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>13.4</b>	12.3	18.0
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	<b>14.3</b>	14.2	13.4

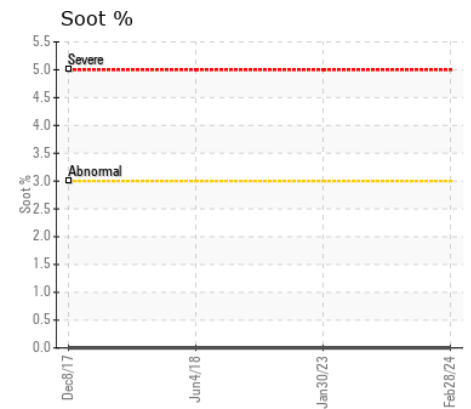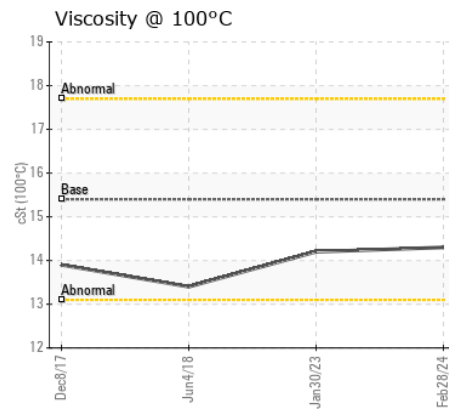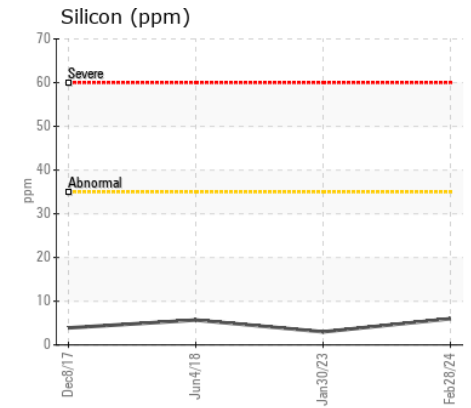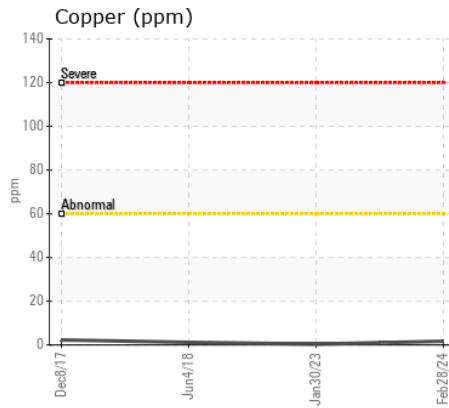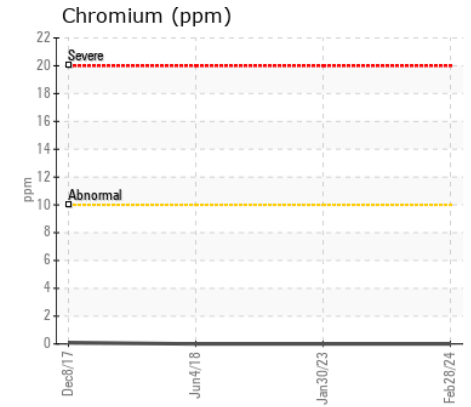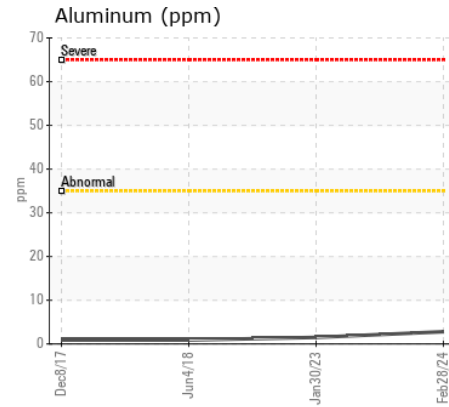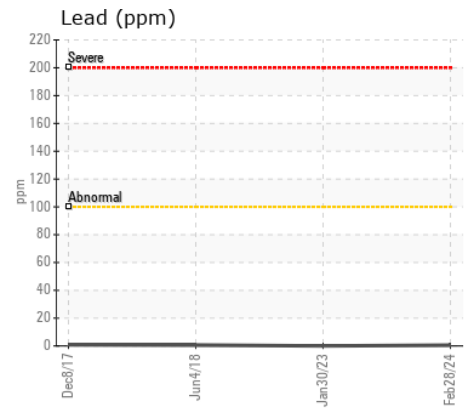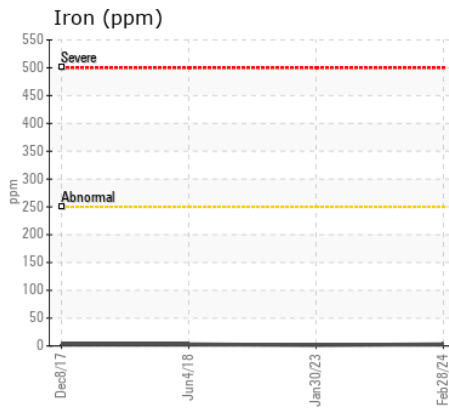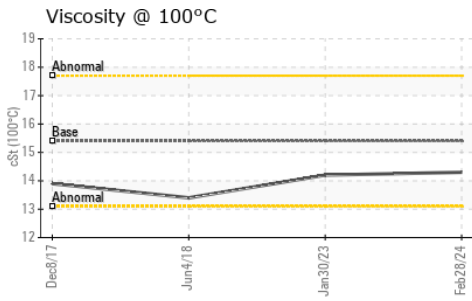

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PN0005792  
**Lab Number** : 02620488  
**Unique Number** : 5737598  
**Test Package** : MOB 1  
**Received** : 07 Mar 2024  
**Tested** : 07 Mar 2024  
**Diagnosed** : 07 Mar 2024 - Kevin Marson

**POWER STATION INC.**  
 1050 JAYSON COURT  
 MISSISSAUGA, ON  
 CA L4W 2V5  
 Contact: Ryan Udall  
 rudall@pwrstn.com  
 T: (905)565-1621  
 F: (905)629-1499

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.