



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**103 ERNEST AVE TORONTO BASEMENT-UNIT#2 BELL CANADA 12VF003685**

Component  
**Right Gasoline Engine**

Fluid  
**ESSO XD-3 EXTRA SAE 30 (40 LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>PN0005798</b>	---	---
Sample Date		Client Info		<b>05 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>955</b>	---	---
Oil Age	hrs	Client Info		<b>39</b>	---	---
Filter Age	hrs	Client Info		<b>39</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>150	<b>4</b>	---	---
Chromium	ppm	ASTM D5185(m)	>20	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>40	<b>&lt;1</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>2</b>	---	---
Copper	ppm	ASTM D5185(m)	>155	<b>1</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Fuel		WC Method	>4.0	<b>&lt;1.0</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Glycol		WC Method		<b>NEG</b>	---	---
Soot %	%	ASTM D7844*		<b>0</b>	---	---
Nitration	Abs/cm	ASTM D7624*	>20	<b>3.3</b>	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>13.0</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>16	<b>2</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>4</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>4</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>644</b>	---	---
Calcium	ppm	ASTM D5185(m)	2550	<b>1623</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1000	<b>952</b>	---	---
Zinc	ppm	ASTM D5185(m)	1120	<b>1038</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>2586</b>	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>6.0</b>	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	12.0	<b>12.3</b>	---	---

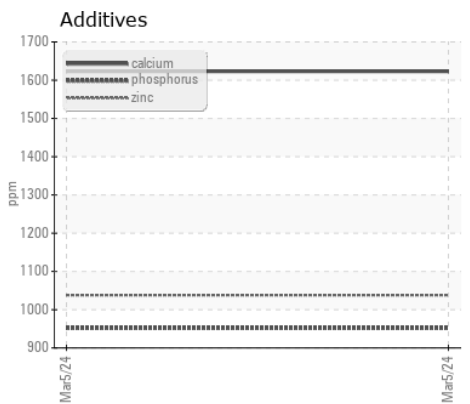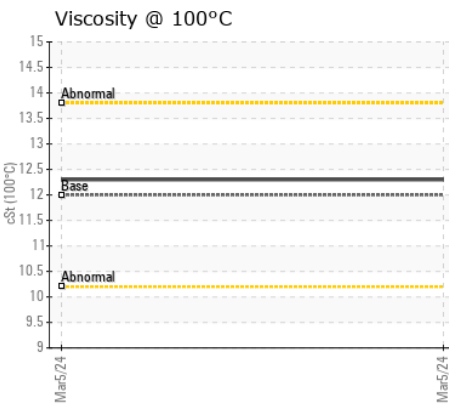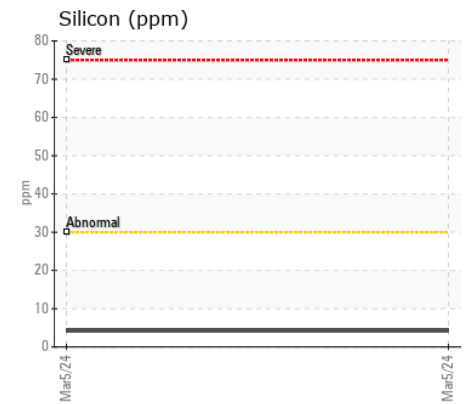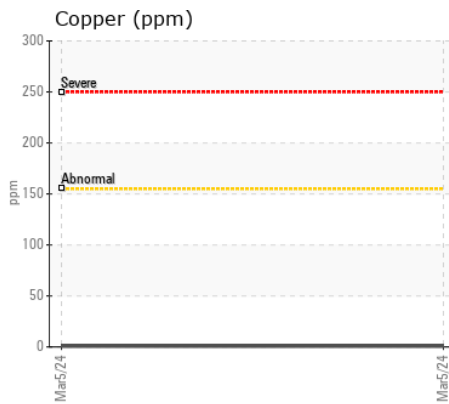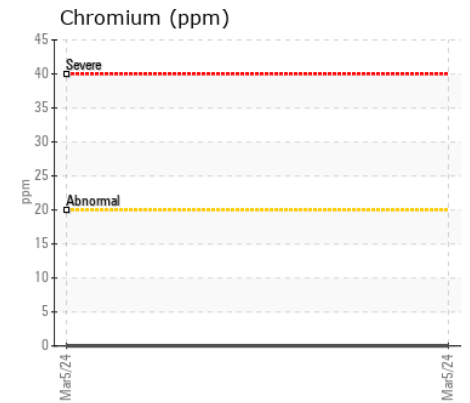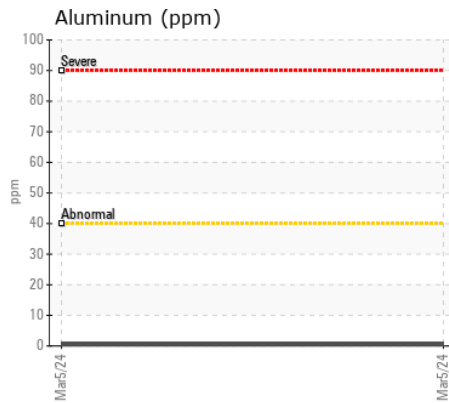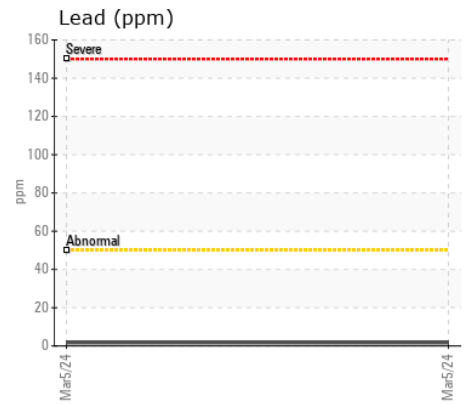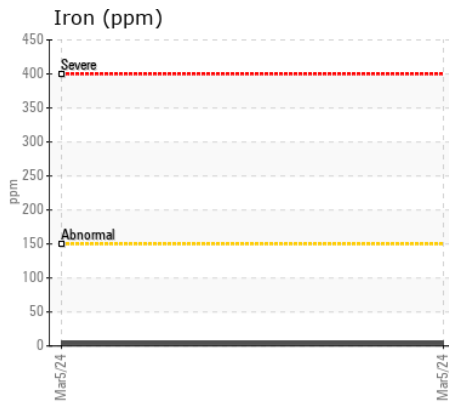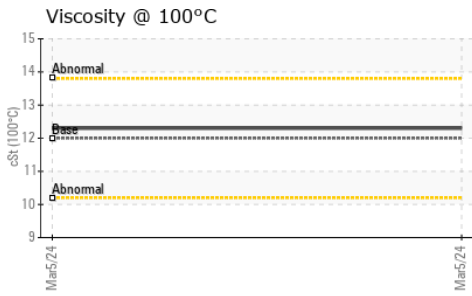

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PN0005798  
**Lab Number** : 02620519  
**Unique Number** : 5737629  
**Test Package** : MOB 1  
**Received** : 07 Mar 2024  
**Tested** : 07 Mar 2024  
**Diagnosed** : 07 Mar 2024 - Wes Davis

**POWER STATION INC.**  
 1050 JAYSON COURT  
 MISSISSAUGA, ON  
 CA L4W 2V5  
 Contact: Brett Kinkley  
 Bkinkley@pwrstn.com  
 T:  
 F: (905)565-8544

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.