



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
(C-FNDO)
Machine Id
[C-FNDO] CESSNA C172 L-35531-51E
Component
Center Piston Aircraft Engine
Fluid
SHELL AEROSHELL W 15W50 MGR (8 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0854761	WC0699229	WC0699231
Sample Date		Client Info		28 Feb 2024	19 Jul 2023	10 Mar 2023
TSN	hrs	Client Info		0	4691	0
TSO	hrs	Client Info		432	237	43
Oil Age	hrs	Client Info		49	49	43
Filter Age	hrs	Client Info		49	49	43
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>90	26	19	46
Chromium	ppm	ASTM D5185(m)	>20	5	5	9
Nickel	ppm	ASTM D5185(m)	>15	2	2	3
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>5	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	7	6	6
Lead	ppm	ASTM D5185(m)	>20000	5690	4594	3425
Copper	ppm	ASTM D5185(m)	>25	9	12	46
Tin	ppm	ASTM D5185(m)	>30	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	VLITE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION





There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>15	6	6	40
Potassium	ppm	ASTM D5185(m)	>20	<1	0	<1
Fuel		WC Method	>4.0	<1.0	<1.0	0.7
Water		WC Method	>0.1	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Silt	scalar	Visual*	NONE	VLITE	VLITE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	<1	3
Boron	ppm	ASTM D5185(m)		0	<1	2
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)	5	0	0	<1
Manganese	ppm	ASTM D5185(m)		0	0	<1
Magnesium	ppm	ASTM D5185(m)	10	<1	<1	2
Calcium	ppm	ASTM D5185(m)	10	1	2	9
Phosphorus	ppm	ASTM D5185(m)	1280	1140	1142	2
Zinc	ppm	ASTM D5185(m)	10	22	10	40
Sulfur	ppm	ASTM D5185(m)	1800	1572	3006	776
Visc @ 100°C	cSt	ASTM D7279(m)	18.2	16.2	20.5	15.1

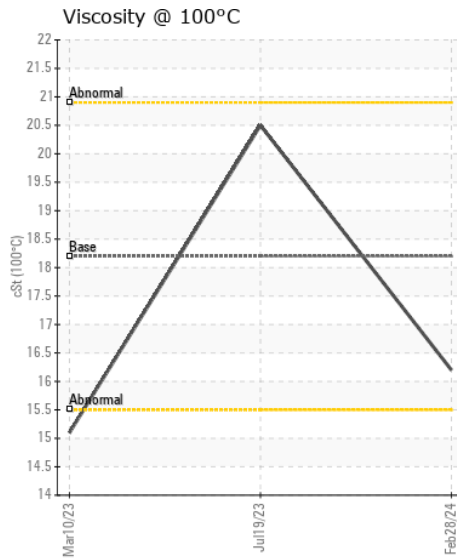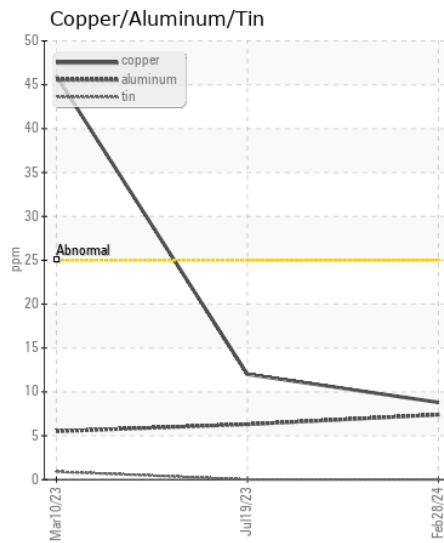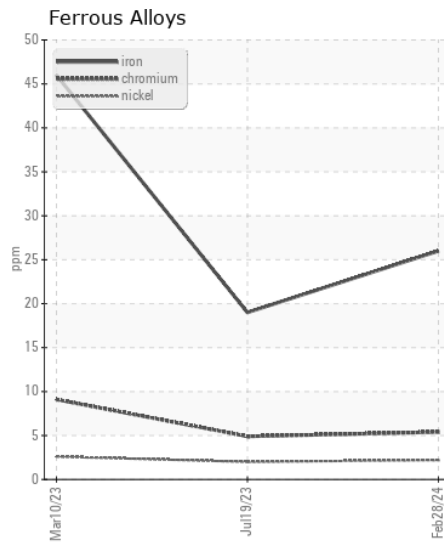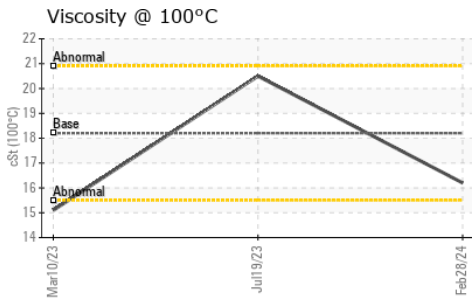

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0854761
Lab Number : 02620533
Unique Number : 5737643
Test Package : AVI 1 (Additional Tests: FT-IR)

First Nations Technical Institute
 314 Airport Road, Tyendinaga Mohawk Territory
 Deseronto, ON
 CA K0K 1X0
 Contact: Doug Leadbeater
 doug@fnti.net
 T: (613)396-5146
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.