



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**7244**  
Component  
**Transmission (Auto)**  
Fluid  
**DEXRON III (--- GAL)**

**RECOMMENDATION**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition. Le fluide n'était pas spécifié, toutefois, une comparaison avec d'autres fluides indiqu que ce fluide est du (GENERIC) DEXRON III. Veuillez confirmer.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0114872</b>	GFL0084451	GFL0073475
Sample Date		Client Info		<b>04 Mar 2024</b>	20 Sep 2023	23 Mar 2023
Machine Age	kms	Client Info		<b>13987</b>	269054	13031
Oil Age	kms	Client Info		<b>0</b>	0	1200
Filter Age	kms	Client Info		<b>0</b>	0	1200
Oil Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Filter Changed		Client Info		<b>Not Changd</b>	Not Changd	Changed
Sample Status				<b>NORMAL</b>	NORMAL	ABNORMAL

**WEAR**

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>300	<b>140</b>	113	▲ 252
Chromium	ppm	ASTM D5185(m)	>2	<b>&lt;1</b>	0	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185(m)	>3	<b>0</b>	0	<1
Silver	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	0
Aluminum	ppm	ASTM D5185(m)	>70	<b>12</b>	12	31
Lead	ppm	ASTM D5185(m)	>85	<b>2</b>	3	11
Copper	ppm	ASTM D5185(m)	>90	<b>15</b>	19	35
Tin	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	<1	3
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

**CONTAMINATION**










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>20	<b>18</b>	11	17
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	2	4
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	VLITE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

**FLUID CONDITION**

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<b>8</b>	9	26
Boron	ppm	ASTM D5185(m)		<b>57</b>	56	78
Barium	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	0	<1
Manganese	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185(m)		<b>5</b>	6	3
Calcium	ppm	ASTM D5185(m)		<b>122</b>	122	104
Phosphorus	ppm	ASTM D5185(m)		<b>215</b>	210	267
Zinc	ppm	ASTM D5185(m)		<b>8</b>	10	10
Sulfur	ppm	ASTM D5185(m)		<b>1459</b>	1385	1194
Visc @ 40°C	cSt	ASTM D7279(m)	26.0	<b>33.6</b>	33.9	34.5

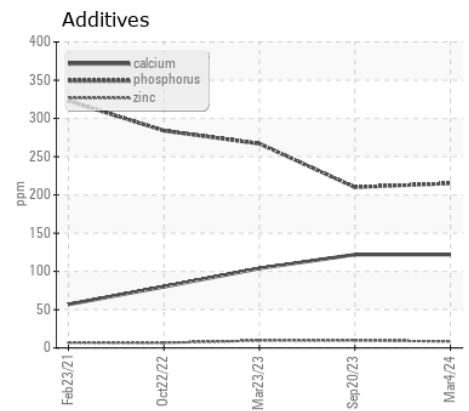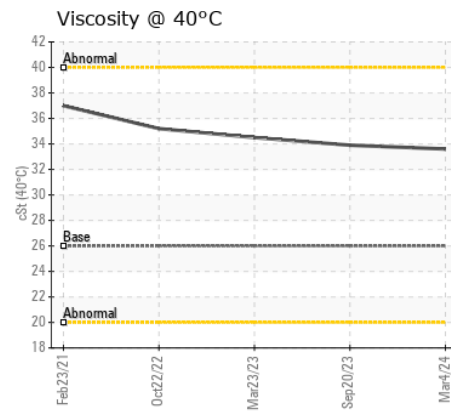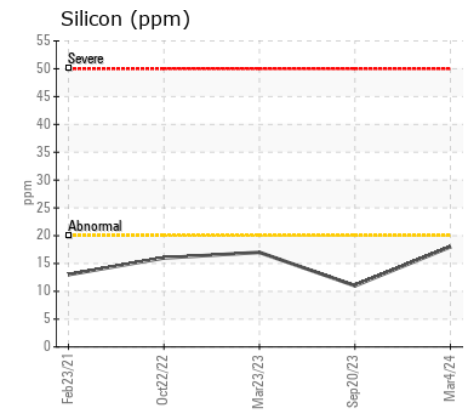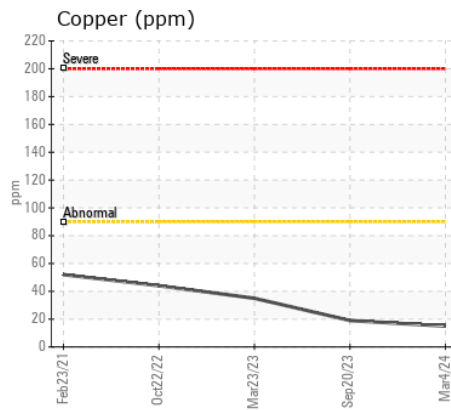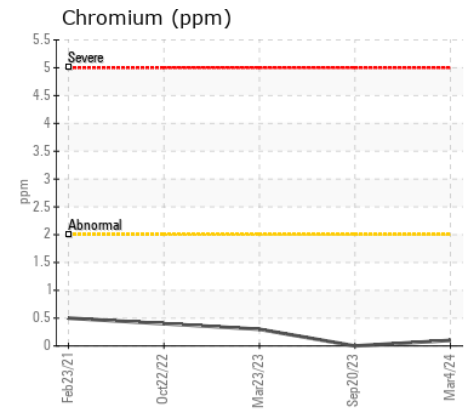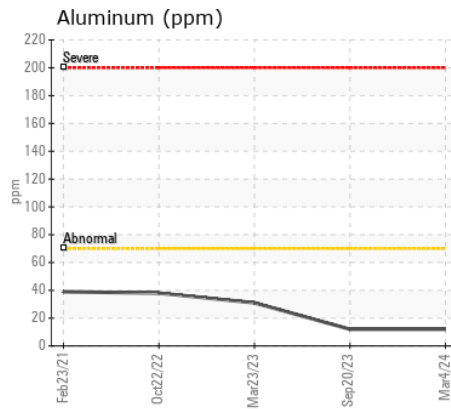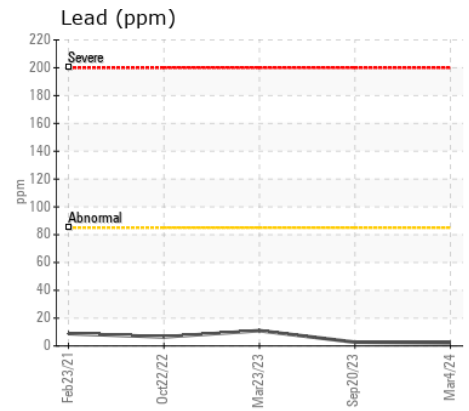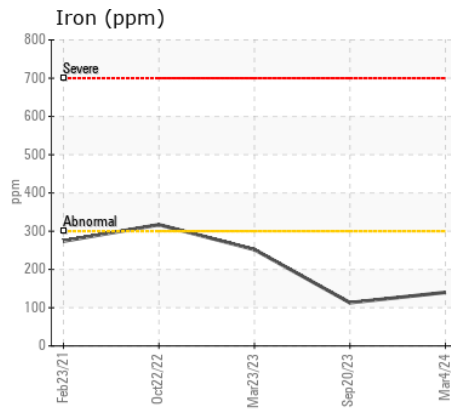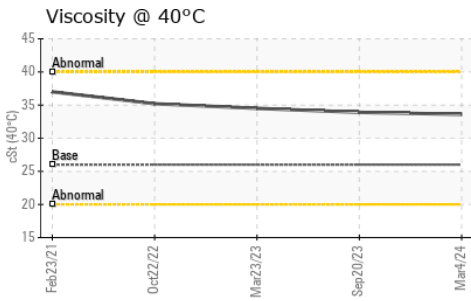

ISO 17025:2017  
Accredited  
Laboratory

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0114872  
**Lab Number** : 02620610  
**Unique Number** : 5737720  
**Test Package** : MOB 1

**Received** : 07 Mar 2024  
**Tested** : 07 Mar 2024  
**Diagnosed** : 07 Mar 2024 - Wes Davis

**GFL Environmental - 780 - GMA - ICI - Solid Waste**  
 4365 boul. St-Elzear Ouest,  
 Laval, QC  
 CA H7P 4J3  
 Contact: Pieces Laval  
 pieces.laval@gflenv.com  
 T: (450)687-3838  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.