



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
ENVIRO CONNEXION
Machine Id
VOLVO A25E 73275
Component
Transmission (Auto)
Fluid
VOLVO AT 102 (--- GAL)

RECOMMENDATION

Confirm the source of the lubricant being utilized for top-up/fill.
Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP	---	---
Sample Date		Client Info		04 Mar 2024	---	---
Machine Age	hrs	Client Info		11748	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>160	11	---	---
Chromium	ppm	ASTM D5185(m)	>5	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>5	0	---	---
Aluminum	ppm	ASTM D5185(m)	>50	5	---	---
Lead	ppm	ASTM D5185(m)	>50	<1	---	---
Copper	ppm	ASTM D5185(m)	>225	17	---	---
Tin	ppm	ASTM D5185(m)	>10	1	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>20	7	---	---
Potassium	ppm	ASTM D5185(m)	>20	9	---	---
Water		WC Method	>0.1	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.1	NEG	---	---

FLUID CONDITION

Additive levels indicate the addition of a different brand, or type of fluid.
The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	---	---
Boron	ppm	ASTM D5185(m)	187	67	---	---
Barium	ppm	ASTM D5185(m)	0.0	1	---	---
Molybdenum	ppm	ASTM D5185(m)	0.0	0	---	---
Manganese	ppm	ASTM D5185(m)	0.0	<1	---	---
Magnesium	ppm	ASTM D5185(m)	6.8	2	---	---
Calcium	ppm	ASTM D5185(m)	215	74	---	---
Phosphorus	ppm	ASTM D5185(m)	445	197	---	---
Zinc	ppm	ASTM D5185(m)	56	10	---	---
Sulfur	ppm	ASTM D5185(m)	1336	1769	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	35.3	28.4	---	---

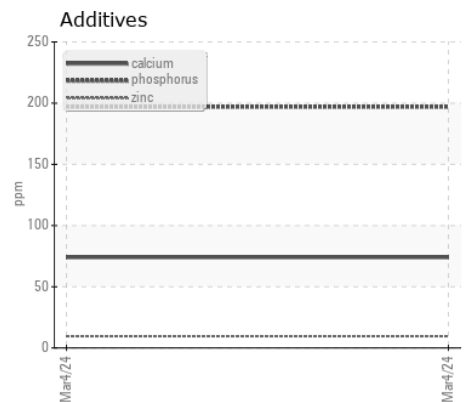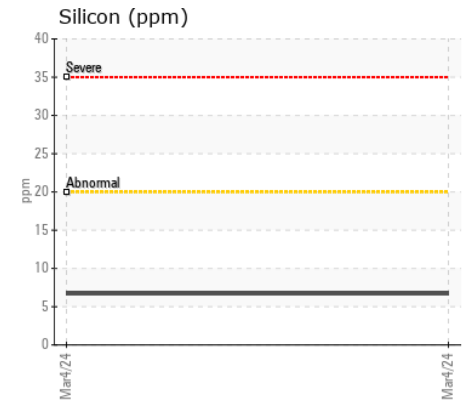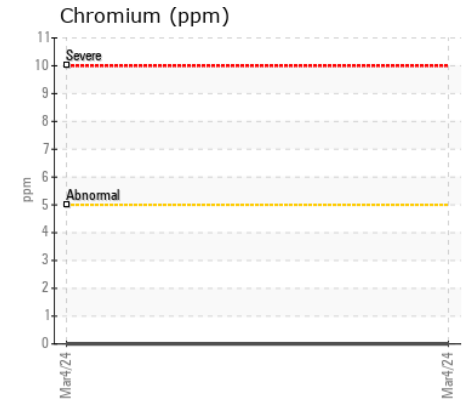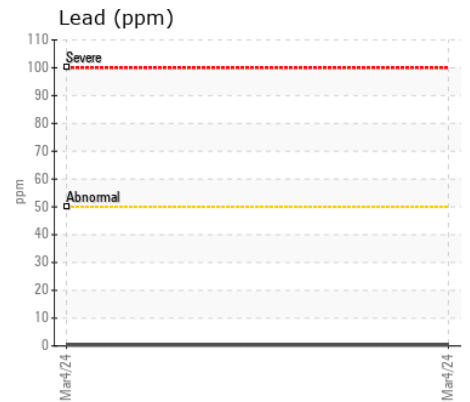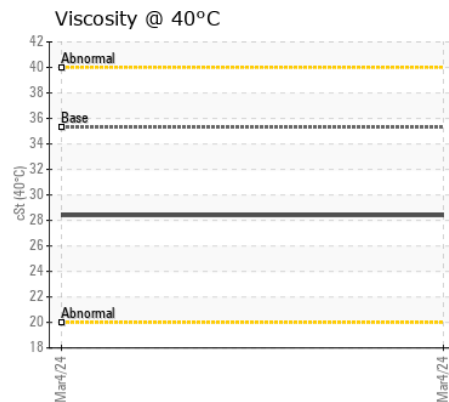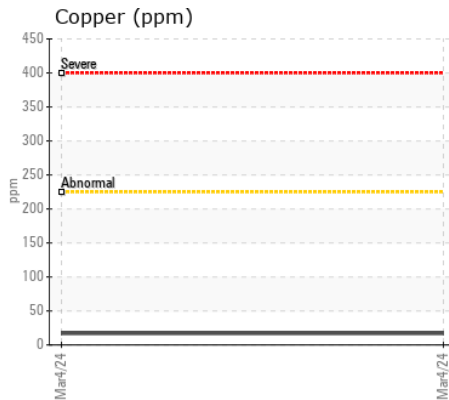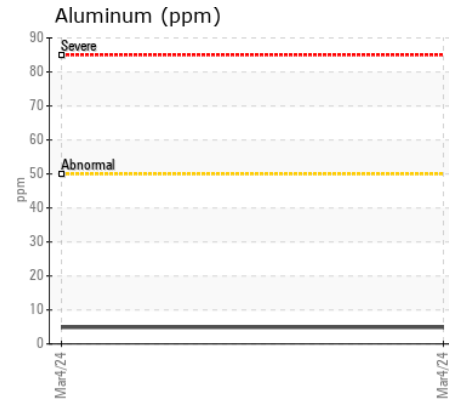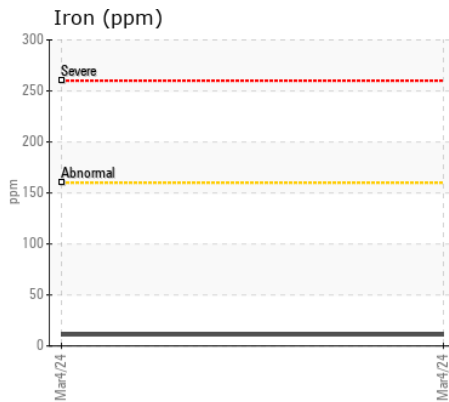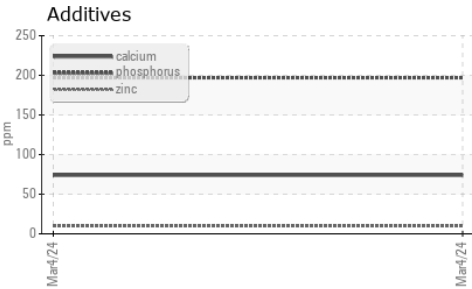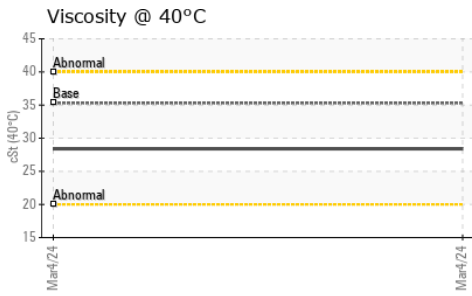

ISO 17025:2017
Accredited
Laboratory

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP
Lab Number : 02620620
Unique Number : 5737730
Test Package : MOB 1
Received : 07 Mar 2024
Tested : 08 Mar 2024
Diagnosed : 08 Mar 2024 - Kevin Marson

STRONGCO EQUIPMENT
 4535 LOUIS B MAYER
 LAVAL, QC
 CA H7P 6B5
 Contact: Marco Castura
 mcastura@strongco.com
 T:
 F: (450)686-0703

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.