



VOLVO

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
[395920]
 Machine Id
633129
 Component
Front Axle
 Fluid
VOLVO WB 102 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		VCP391621	VCP429744	VCE245584
Sample Date		Client Info		04 Mar 2024	25 Sep 2023	30 Jan 2023
Machine Age	hrs	Client Info		2533	2000	1060
Oil Age	hrs	Client Info		500	2000	0
Filter Age	hrs	Client Info		500	0	0
Oil Changed		Client Info		Not Changed	Not Changed	Changed
Filter Changed		Client Info		Changed	Changed	Not Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	32	45	88
Chromium	ppm	ASTM D5185(m)	>20	<1	1	2
Nickel	ppm	ASTM D5185(m)	>10	0	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	<1
Silver	ppm	ASTM D5185(m)		0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>30	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>50	0	0	0
Copper	ppm	ASTM D5185(m)	>120	4	2	3
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>50	10	12	16
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.2	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	2	9
Boron	ppm	ASTM D5185(m)		113	123	111
Barium	ppm	ASTM D5185(m)		0	<1	0
Molybdenum	ppm	ASTM D5185(m)		1	1	4
Manganese	ppm	ASTM D5185(m)		1	2	5
Magnesium	ppm	ASTM D5185(m)		8	11	8
Calcium	ppm	ASTM D5185(m)		4117	4281	4020
Phosphorus	ppm	ASTM D5185(m)		1372	1357	1421
Zinc	ppm	ASTM D5185(m)		1632	1680	1636
Sulfur	ppm	ASTM D5185(m)		3507	3377	3651
Visc @ 40°C	cSt	ASTM D7279(m)		42.4	39.0	40.5

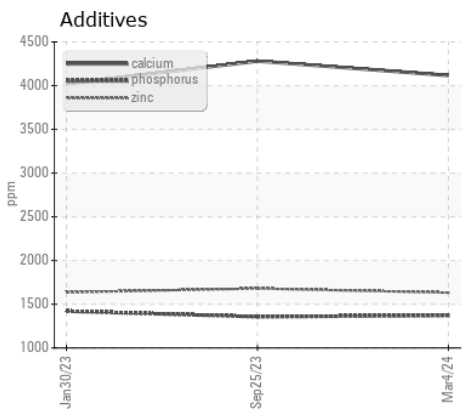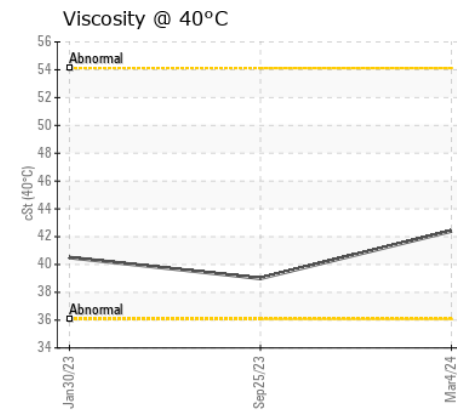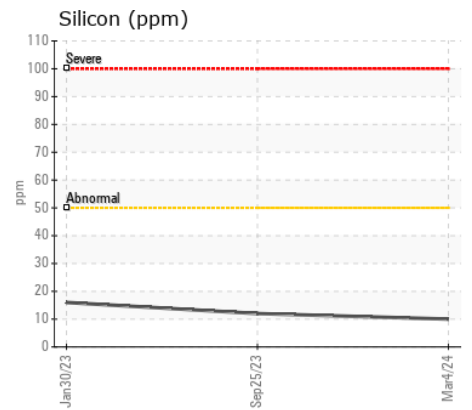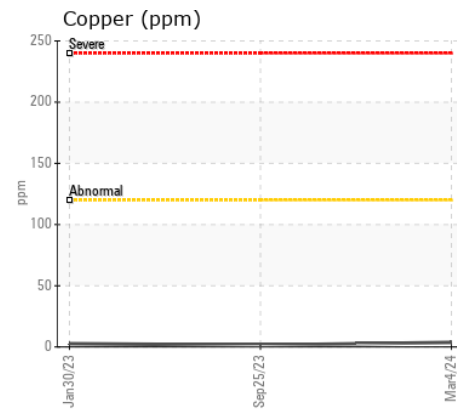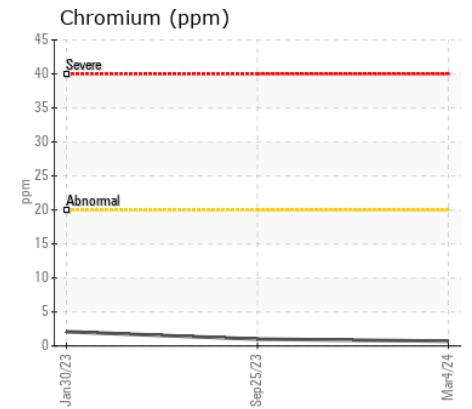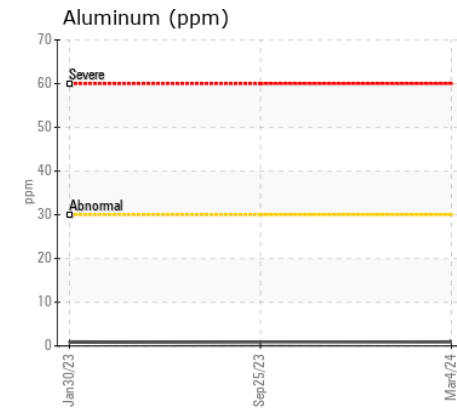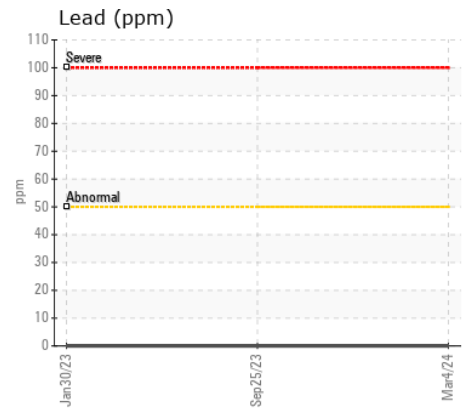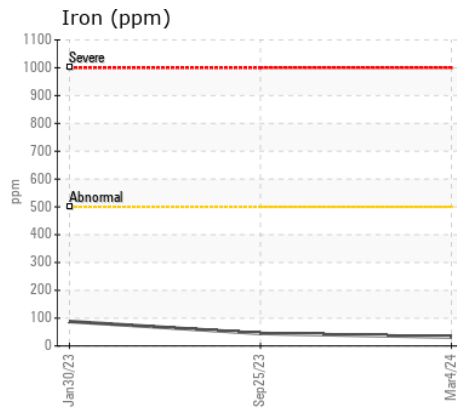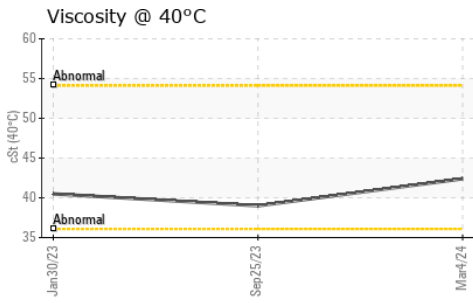

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : VCP391621 **Received** : 07 Mar 2024
Lab Number : 02620628 **Tested** : 07 Mar 2024
Unique Number : 5737738 **Diagnosed** : 07 Mar 2024 - Wes Davis
Test Package : MOB 1

CRH CANADA GROUP INC.
 P.O. BOX 5400
 CONCORD, ON
 CA L4K 1B6
 Contact: Dan Brown
 dan.brown@ca.crh.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: