



# LIEBHERR

## OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**LIEBHERR R944CEW 031629-793**

Component  
**Splitter Box**

Fluid  
**PETRO CANADA TRAXON SYNTHETIC 75W90 (10 LTR)**

### RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>LH0285003</b>	LH	LH
Sample Date		Client Info		<b>01 Mar 2024</b>	09 Jan 2022	07 Sep 2021
Machine Age	hrs	Client Info		<b>15574</b>	12577	12577
Oil Age	hrs	Client Info		<b>0</b>	0	0
Filter Age	hrs	Client Info		<b>0</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>None</b>	None	None
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

### WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>41</b>	12	10
Chromium	ppm	ASTM D5185(m)	>5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)		<b>&lt;1</b>	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Lead	ppm	ASTM D5185(m)	>30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185(m)	>20	<b>1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE

### CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<b>3</b>	1	1
Potassium	ppm	ASTM D5185(m)	>20	<b>6</b>	1	1
Water		WC Method	>0.1	<b>NEG</b>	NEG	NEG
Silt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Debris	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Odor	scalar	Visual*	NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	NEG	NEG

### FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<b>21</b>	<1	<1
Boron	ppm	ASTM D5185(m)	328	<b>263</b>	265	269
Barium	ppm	ASTM D5185(m)	1	<b>11</b>	0	0
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Manganese	ppm	ASTM D5185(m)		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185(m)	1	<b>3</b>	1	1
Calcium	ppm	ASTM D5185(m)	7	<b>18</b>	22	24
Phosphorus	ppm	ASTM D5185(m)	1145	<b>1181</b>	1210	1191
Zinc	ppm	ASTM D5185(m)	3	<b>55</b>	144	158
Sulfur	ppm	ASTM D5185(m)	17909	<b>17754</b>	18242	17766
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	<b>89.3</b>	81.1	78.4

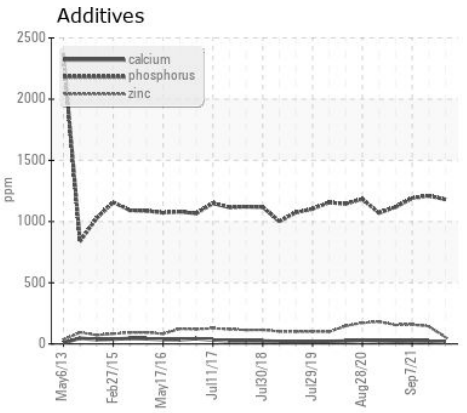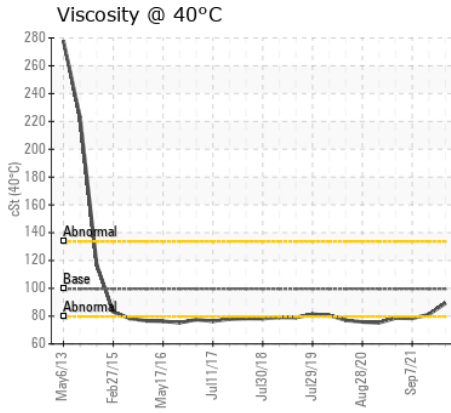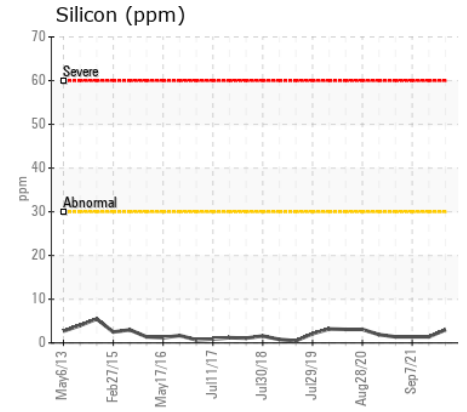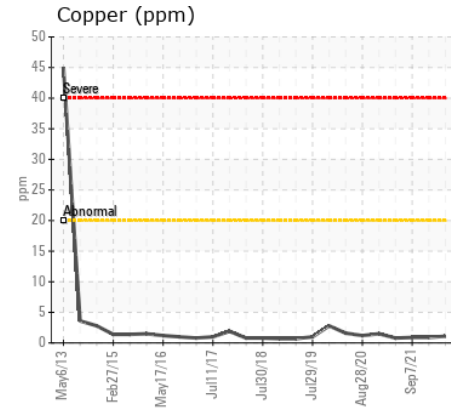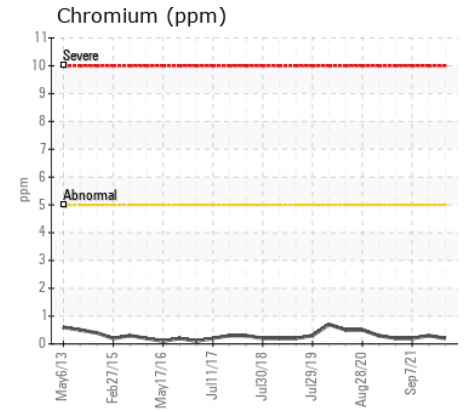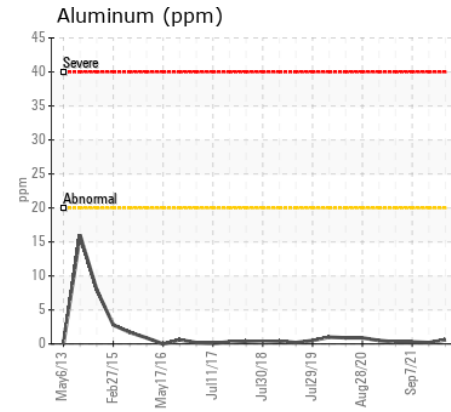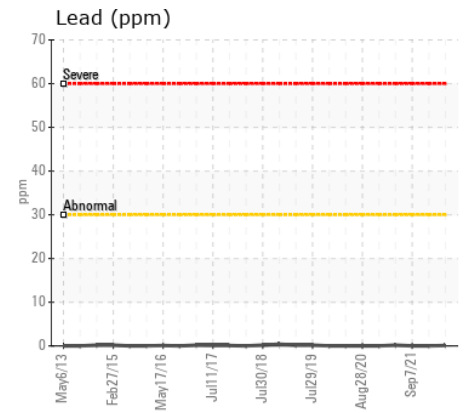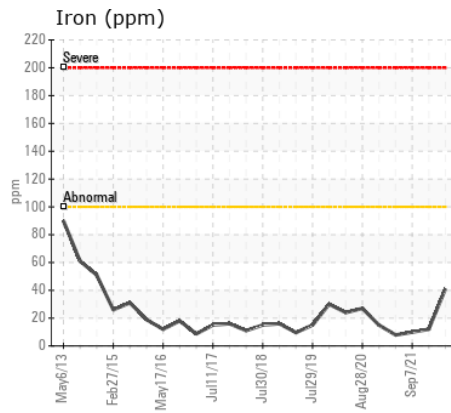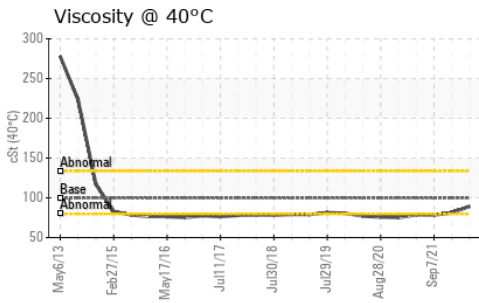

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : LH0285003 **Received** : 07 Mar 2024  
**Lab Number** : 02620665 **Tested** : 07 Mar 2024  
**Unique Number** : 5737775 **Diagnosed** : 07 Mar 2024 - Wes Davis  
**Test Package** : MOB 1

**GERDAU AMERISTEEL**  
 1 GERDAU COURT  
 WHITBY, ON  
 CA L1N 5T1  
 Contact: Tyson Young  
 tyoung@gerdauameristeel.com  
 T: (905)668-8811  
 F: (905)668-6469

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.