



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L586 059953-1334

Component
Splitter Box

Fluid
PETRO CANADA TRAXON 75W90 SYNTHETIC (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0270298	LH0284954	LH0203042
Sample Date		Client Info		05 Mar 2024	01 Feb 2024	27 Sep 2021
Machine Age	hrs	Client Info		7962	4939	1012
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>365	15	27	130
Chromium	ppm	ASTM D5185(m)	>6	0	<1	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	8
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>5	<1	2	2
Lead	ppm	ASTM D5185(m)	>5	<1	2	<1
Copper	ppm	ASTM D5185(m)	>20	<1	3	<1
Tin	ppm	ASTM D5185(m)	>4	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	VLITE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	2	3	2
Potassium	ppm	ASTM D5185(m)	>20	1	2	3
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	<1	<1	7
Boron	ppm	ASTM D5185(m)	328	72	57	5
Barium	ppm	ASTM D5185(m)	1	<1	0	17
Molybdenum	ppm	ASTM D5185(m)		3	0	1
Manganese	ppm	ASTM D5185(m)		0	0	6
Magnesium	ppm	ASTM D5185(m)	1	11	3	11
Calcium	ppm	ASTM D5185(m)	7	95	434	28
Phosphorus	ppm	ASTM D5185(m)	1145	891	1774	2273
Zinc	ppm	ASTM D5185(m)	3	43	239	86
Sulfur	ppm	ASTM D5185(m)	17909	20375	17173	25144
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	86.3	92.3	188

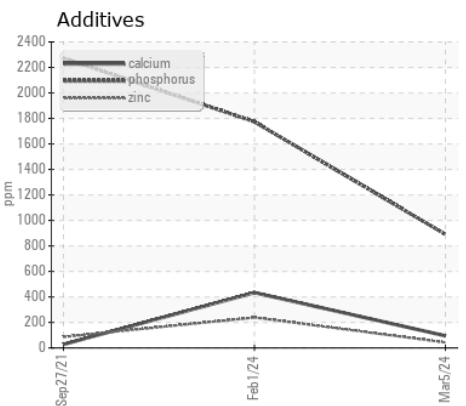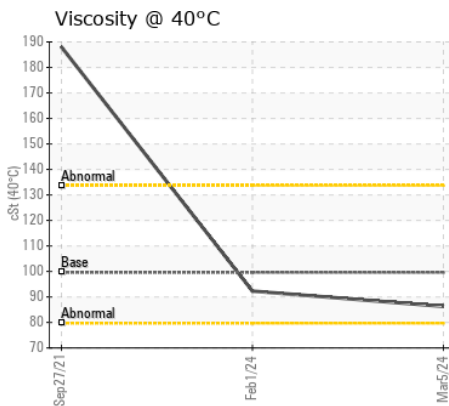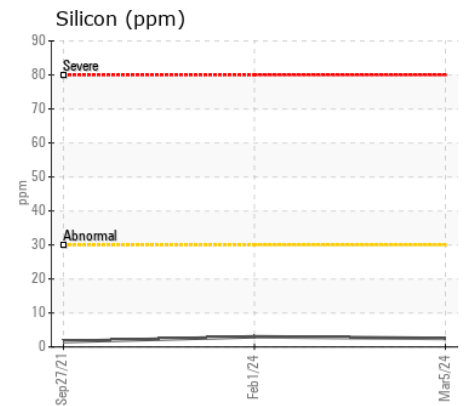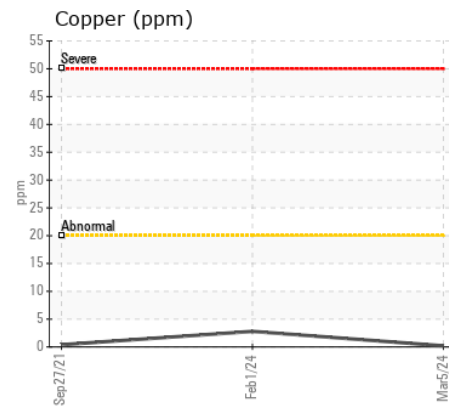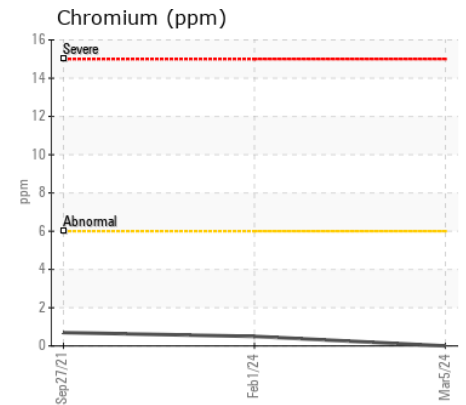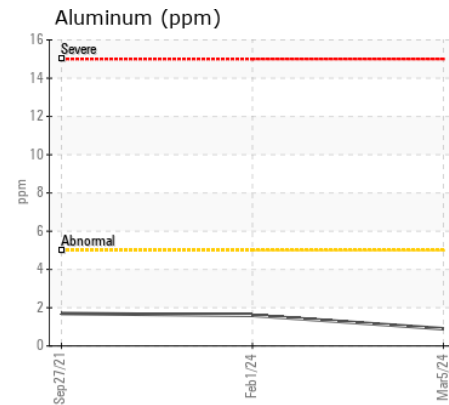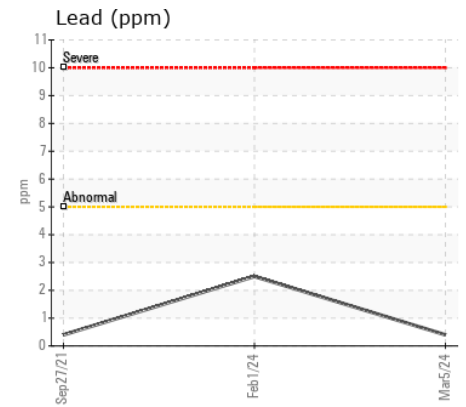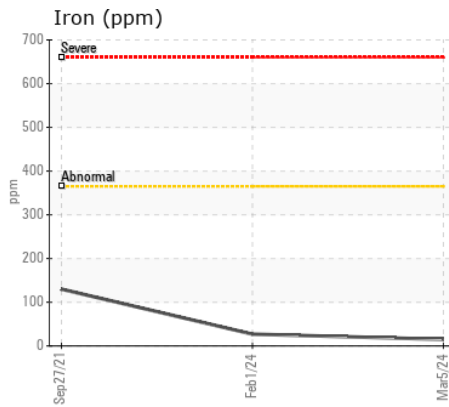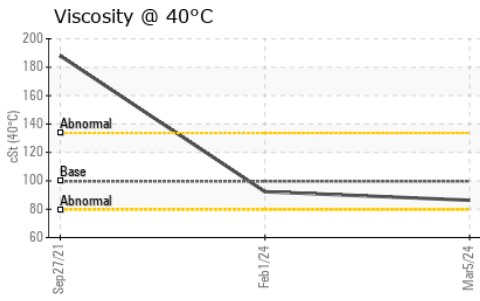

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0270298
Lab Number : 02620668
Unique Number : 5737778
Test Package : MOB 1
Received : 07 Mar 2024
Tested : 07 Mar 2024
Diagnosed : 07 Mar 2024 - Wes Davis

THOMAS CAVANAGH CONSTRUCTION LTD
 RR # 2, 9094 CAVANAGH ROAD
 ASHTON, ON
 CA K0A 1B0
 Contact: Keith

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (613)257-4995
 F: (613)253-0071