

Machine Id
JOHN DEERE 853MH
Component
Front Diesel Engine
Fluid
{not provided} (27 LTR)

RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC337987	---	---
Sample Date		Client Info		29 Feb 2024	---	---
Machine Age	hrs	Client Info		11197	---	---
Oil Age	hrs	Client Info		112	---	---
Filter Age	hrs	Client Info		112	---	---
Oil Changed		Client Info		Not Changd	---	---
Filter Changed		Client Info		Not Changd	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>51	16	---	---
Chromium	ppm	ASTM D5185(m)	>11	0	---	---
Nickel	ppm	ASTM D5185(m)	>5	<1	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>31	1	---	---
Lead	ppm	ASTM D5185(m)	>26	<1	---	---
Copper	ppm	ASTM D5185(m)	>26	<1	---	---
Tin	ppm	ASTM D5185(m)	>4	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION












There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>22	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	3	---	---
Fuel		WC Method	>2.1	<1.0	---	---
Water		WC Method	>0.21	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	7.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.3	---	---
Emulsified Water	scalar	Visual*	>0.21	NEG	---	---

FLUID CONDITION

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

Sodium	ppm	ASTM D5185(m)	>31	5	---	---
Boron	ppm	ASTM D5185(m)		26	---	---
Barium	ppm	ASTM D5185(m)		0	---	---
Molybdenum	ppm	ASTM D5185(m)		60	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		1074	---	---
Calcium	ppm	ASTM D5185(m)		842	---	---
Phosphorus	ppm	ASTM D5185(m)		1015	---	---
Zinc	ppm	ASTM D5185(m)		1175	---	---
Sulfur	ppm	ASTM D5185(m)		2893	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.7	---	---
Base Number (BN)	mg KOH/g	ASTM D2896*		10.49	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		89.6	---	---
Visc @ 100°C	cSt	ASTM D7279(m)		14.5	---	---
Viscosity Index (VI)	Scale	ASTM D2270*		168	---	---

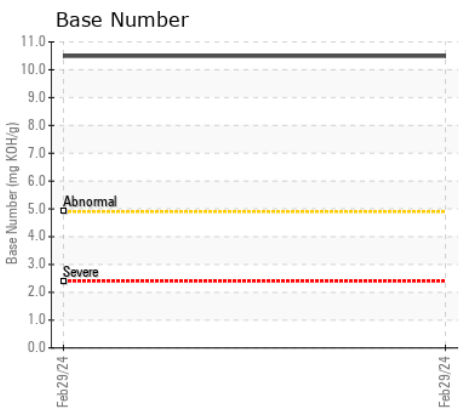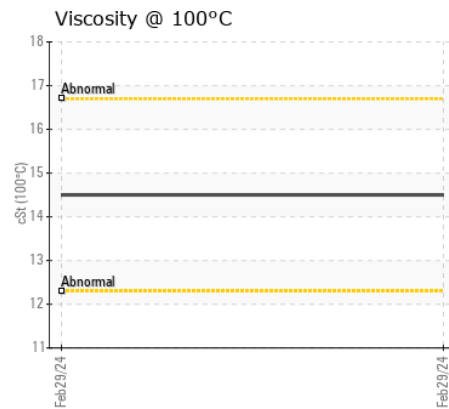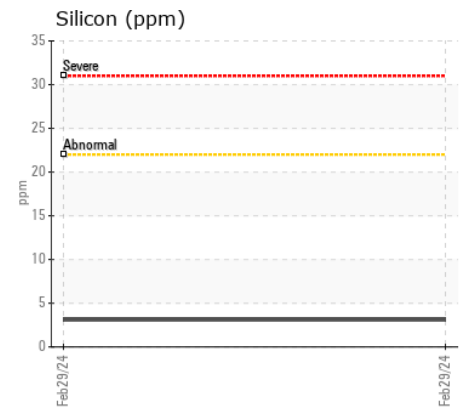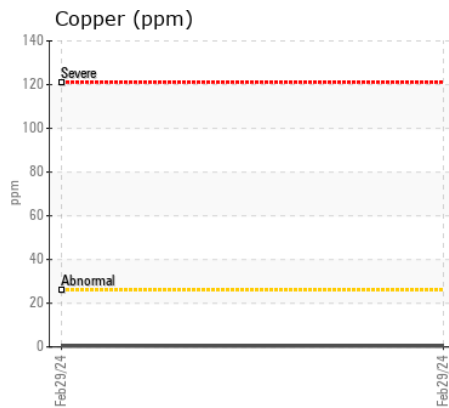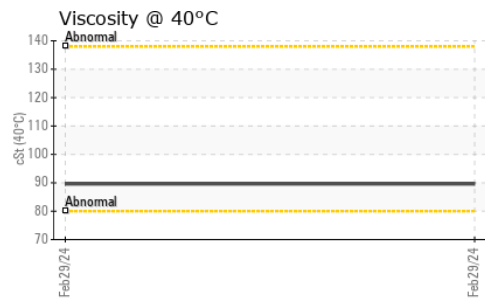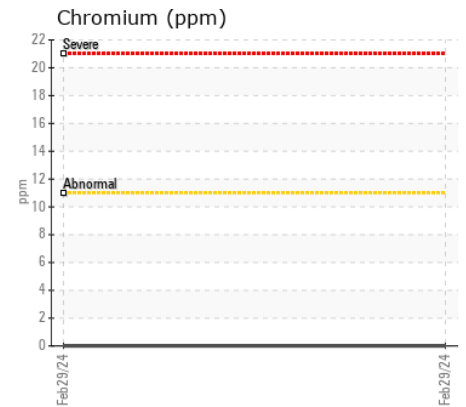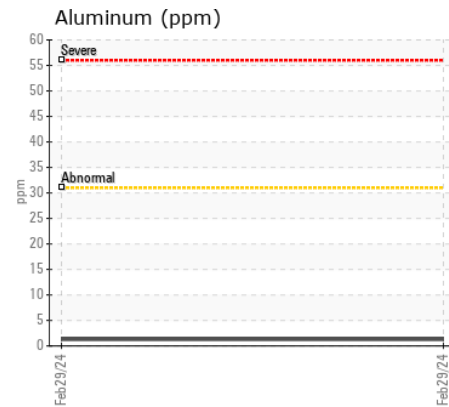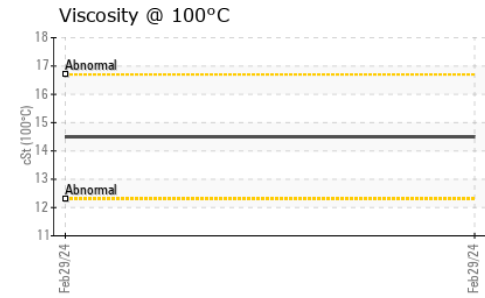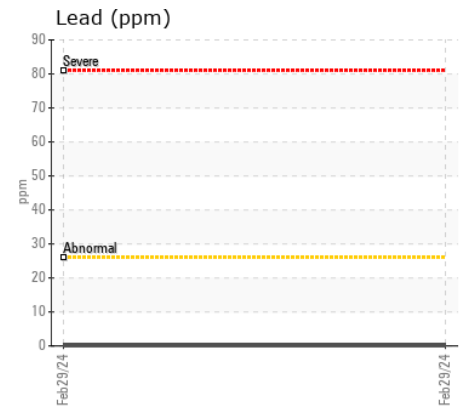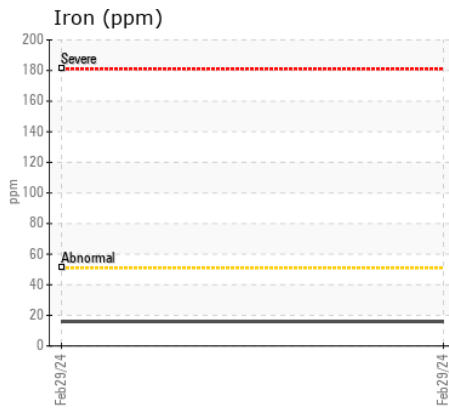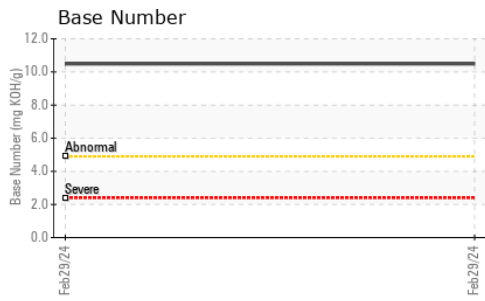

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC337987 **Received** : 08 Mar 2024
Lab Number : 02620729 **Tested** : 11 Mar 2024
Unique Number : 5737839 **Diagnosed** : 11 Mar 2024 - Wes Davis
Test Package : MOB 2 (Additional Tests: KV40, VI)

COUPE RMB
 3590 BOUL. MARTEL
 ST-HONERIE, QC
 CA G0V 1L0
 Contact: Jacques Dionne
 jdionne350@gmail.com
 T: (418)817-3742
 F: (418)673-1917

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.