



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
401164
Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0093662	GFL0063138	GFL0063145
Sample Date		Client Info		19 Feb 2024	08 Nov 2023	27 Sep 2023
Machine Age	hrs	Client Info		10933	10331	10065
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		Changed	Changed	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>120	17	8	20
Chromium	ppm	ASTM D5185(m)	>20	<1	0	0
Nickel	ppm	ASTM D5185(m)	>15	<1	0	<1
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	1	3
Lead	ppm	ASTM D5185(m)	>40	<1	<1	<1
Copper	ppm	ASTM D5185(m)	>330	6	3	7
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










Il n'y a aucun indice de contamination dans l'huile.

Silicon	ppm	ASTM D5185(m)	>25	4	2	3
Potassium	ppm	ASTM D5185(m)	>20	1	0	2
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.1	0	0.1
Nitration	Abs/cm	ASTM D7624*	>20	7.4	1.8	7.6
Sulfation	Abs/.1mm	ASTM D7415*	>30	18.9	6.7	19.3
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

L'état de l'huile est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		1	2	2
Boron	ppm	ASTM D5185(m)	250	<1	2	2
Barium	ppm	ASTM D5185(m)	10	<1	<1	<1
Molybdenum	ppm	ASTM D5185(m)	100	57	59	60
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)	450	958	940	981
Calcium	ppm	ASTM D5185(m)	3000	1081	1076	1135
Phosphorus	ppm	ASTM D5185(m)	1150	1022	990	1036
Zinc	ppm	ASTM D5185(m)	1350	1192	1209	1250
Sulfur	ppm	ASTM D5185(m)	4250	2673	2612	2589
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.0	3.5	15.1
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.0	11.1	10.9

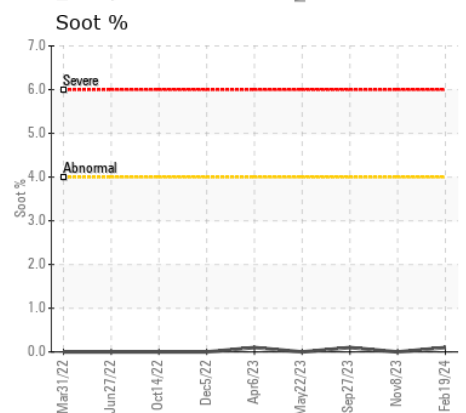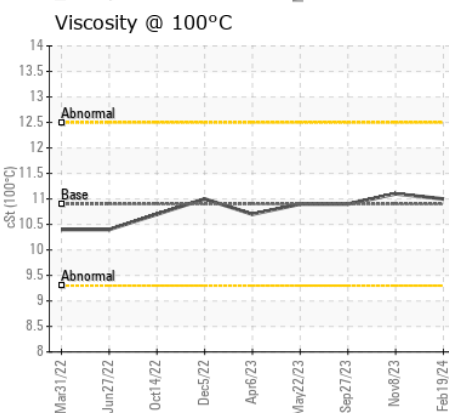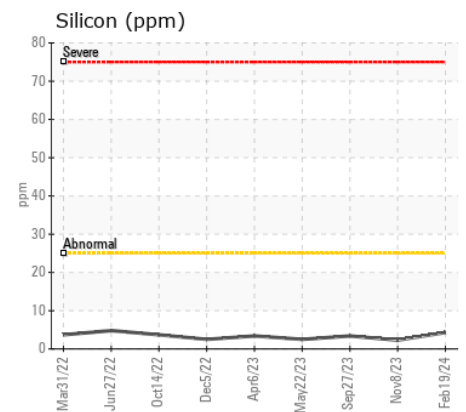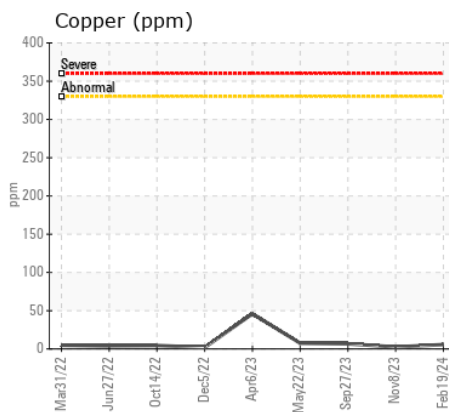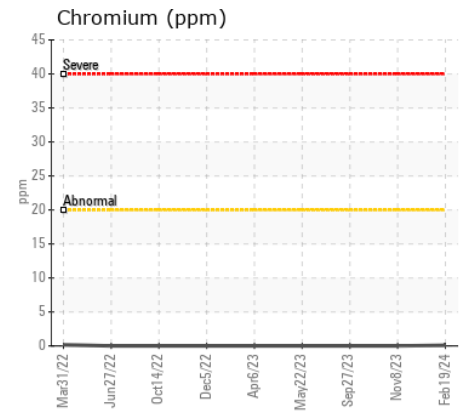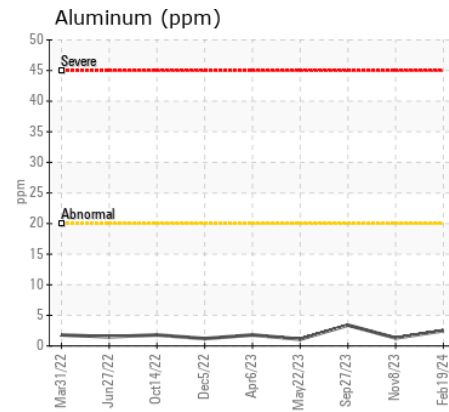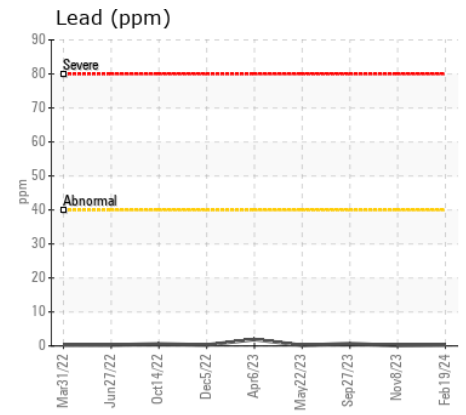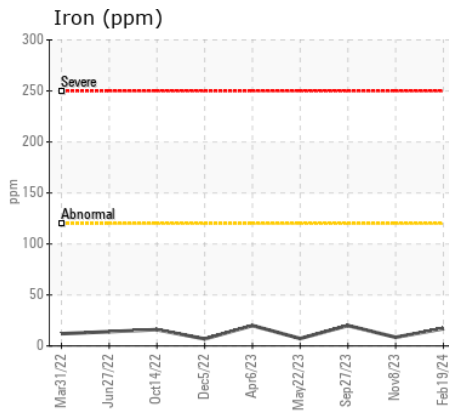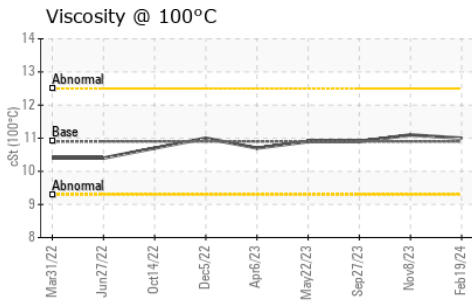

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9 **GFL Environmental - 769 - Drummondville CD**
Sample No. : GFL0093662 **Received** : 08 Mar 2024 **1005 rue Rhea**
Lab Number : 02620758 **Tested** : 08 Mar 2024 **Drummondville, QC**
Unique Number : 5737868 **Diagnosed** : 08 Mar 2024 - Wes Davis **CA J2B 8A9**
Test Package : MOB 1 **Contact: Service Manager**

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: