



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id  
**2667**  
 Component  
**Diesel Engine**  
 Fluid  
**KENDALL SUPER-D XA 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0883046	---	---
Sample Date		Client Info		05 Feb 2024	---	---
Machine Age	hrs	Client Info		678	---	---
Oil Age	hrs	Client Info		438	---	---
Filter Age	hrs	Client Info		438	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

## WEAR

Metal levels are typical for a new component breaking in.

Iron	ppm	ASTM D5185(m)	>100	20	---	---
Chromium	ppm	ASTM D5185(m)	>20	<1	---	---
Nickel	ppm	ASTM D5185(m)	>4	0	---	---
Titanium	ppm	ASTM D5185(m)		80	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	3	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	2	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		<1	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	8	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel		WC Method	>5	<1.0	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>3	0	---	---
Nitration	Abs/cm	ASTM D7624*	>20	8.6	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.0	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		3	---	---
Boron	ppm	ASTM D5185(m)		89	---	---
Barium	ppm	ASTM D5185(m)		1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		<1	---	---
Magnesium	ppm	ASTM D5185(m)		360	---	---
Calcium	ppm	ASTM D5185(m)		1969	---	---
Phosphorus	ppm	ASTM D5185(m)		984	---	---
Zinc	ppm	ASTM D5185(m)	1260	1170	---	---
Sulfur	ppm	ASTM D5185(m)		3242	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	15.2	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	15.3	13.9	---	---

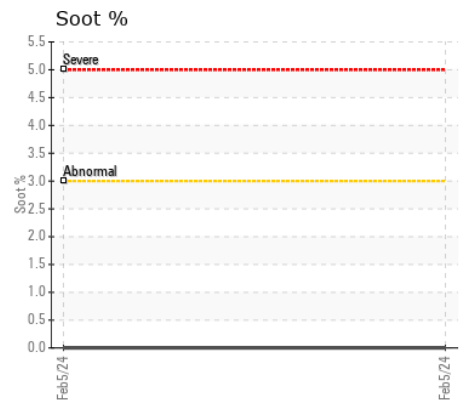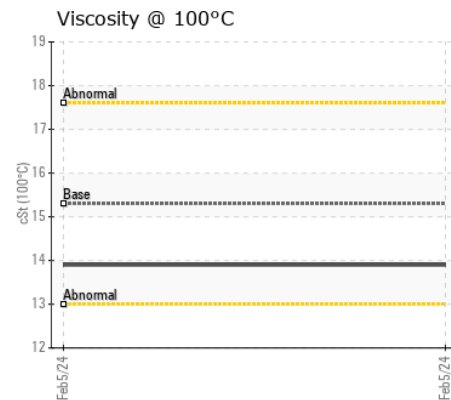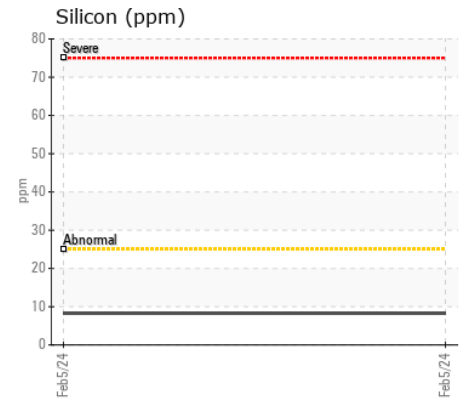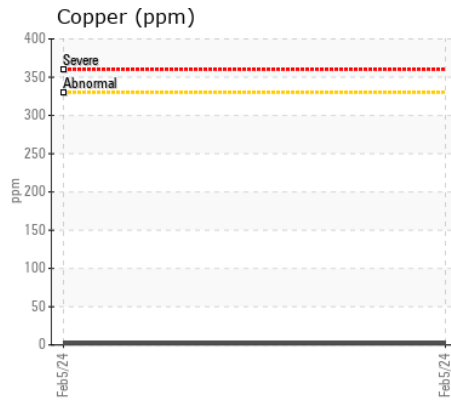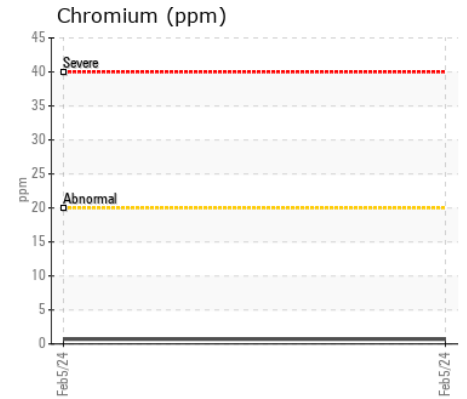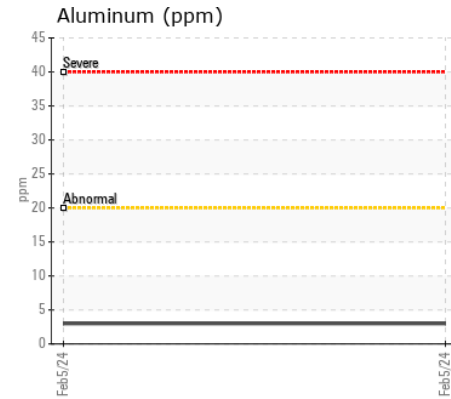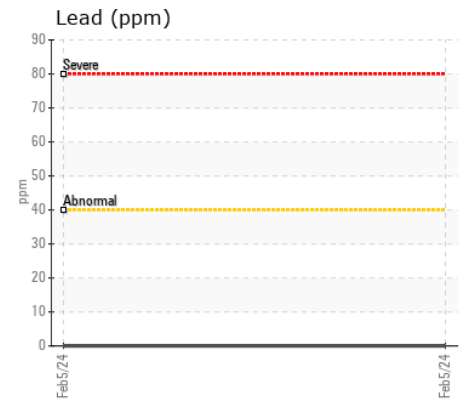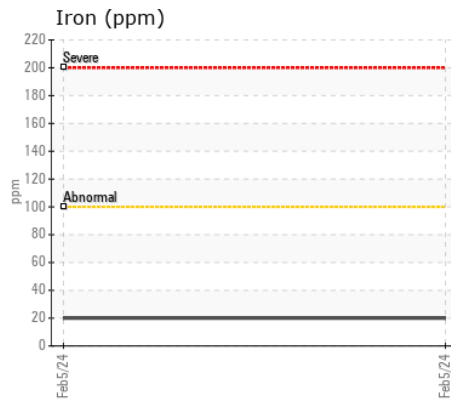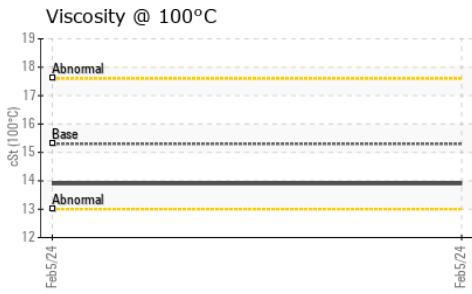

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0883046 **Received** : 27 Mar 2024  
**Lab Number** : 02624882 **Tested** : 27 Mar 2024  
**Unique Number** : 5750001 **Diagnosed** : 27 Mar 2024 - Wes Davis  
**Test Package** : MOB 1 ( Additional Tests: Visual )

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

**CAPITAL PAVING**  
 BOX 815,, 4459 CONCESSION 7  
 PUSLINCH, ON  
 CA N0B 2J0  
 Contact: Don Steenson  
 dsteenson@capitalpaving.on.ca  
 T: (519)822-4511  
 F: (519)822-1454