



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR R945 055572-1866

Component
Splitter Box

Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (3 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0281035	LH0226579	---
Sample Date		Client Info		21 Mar 2024	06 Apr 2023	---
Machine Age	hrs	Client Info		1586	562	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		Changed	Changed	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	11	13	---
Chromium	ppm	ASTM D5185(m)	>5	0	0	---
Nickel	ppm	ASTM D5185(m)	>5	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	0	---
Aluminum	ppm	ASTM D5185(m)	>20	<1	0	---
Lead	ppm	ASTM D5185(m)	>30	0	<1	---
Copper	ppm	ASTM D5185(m)	>20	<1	2	---
Tin	ppm	ASTM D5185(m)	>10	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	NONE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	<1	1	---
Potassium	ppm	ASTM D5185(m)	>20	<1	1	---
Water		WC Method	>0.1	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	NONE	NONE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	2	2	---
Boron	ppm	ASTM D5185(m)	328	269	<1	---
Barium	ppm	ASTM D5185(m)	1	0	0	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		0	<1	---
Magnesium	ppm	ASTM D5185(m)	1	<1	2	---
Calcium	ppm	ASTM D5185(m)	7	17	9	---
Phosphorus	ppm	ASTM D5185(m)	1145	1246	1560	---
Zinc	ppm	ASTM D5185(m)	3	25	12	---
Sulfur	ppm	ASTM D5185(m)	17909	20557	27747	---
Visc @ 40°C	cSt	ASTM D7279(m)	99.6	99.2	192	---

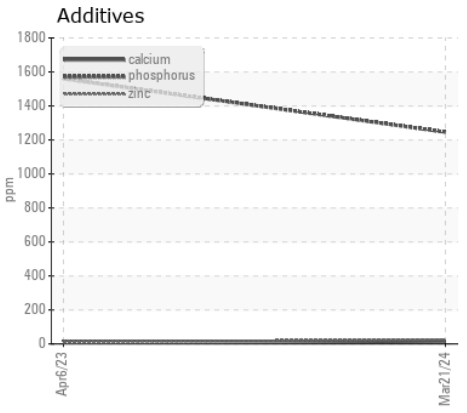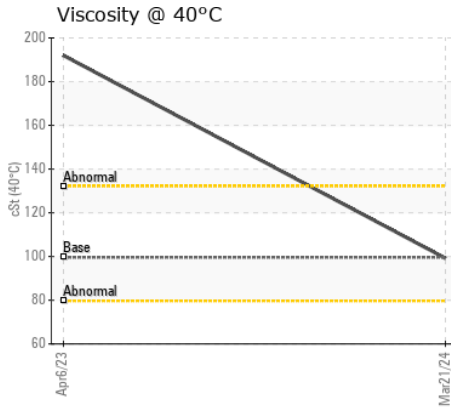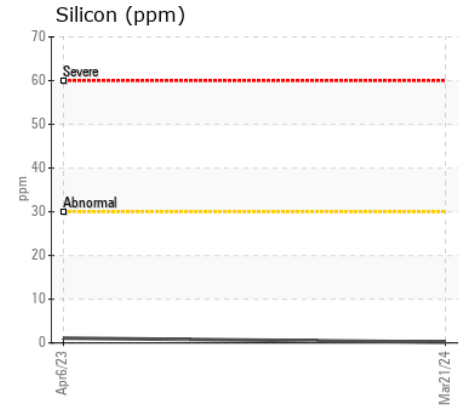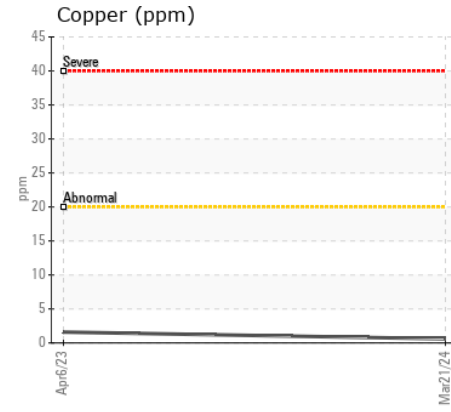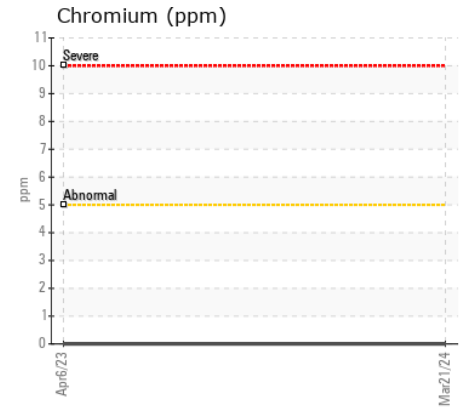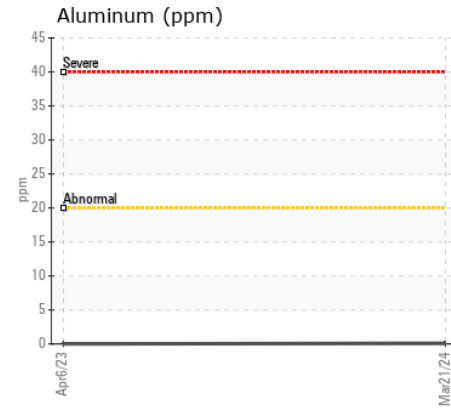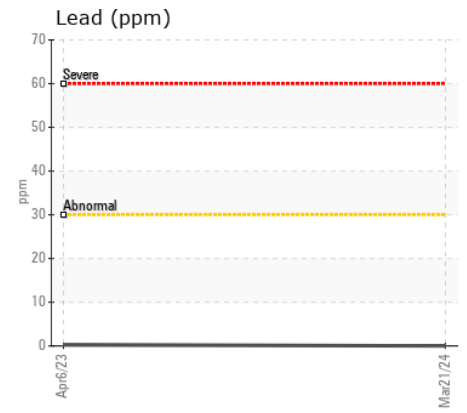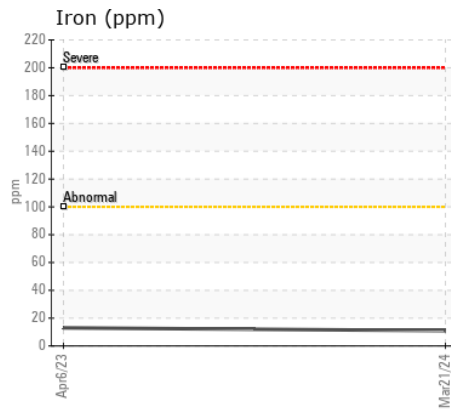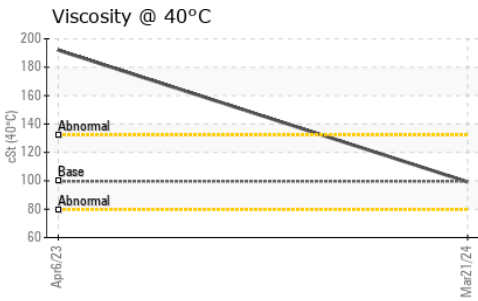

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0281035 **Received** : 27 Mar 2024
Lab Number : 02625017 **Tested** : 27 Mar 2024
Unique Number : 5750136 **Diagnosed** : 27 Mar 2024 - Wes Davis
Test Package : MOB 1

Amix Recycling
 11698 140 Street
 Surrey, BC
 CA V3R 2V4
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
 F: (250)802-1002