



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>



Machine Id  
**701113**  
Component  
**2 Transmission (Auto)**  
Fluid  
**CASTROL TRANSYND 668 (5 LTR)**

**RECOMMENDATION**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0107649</b>	---	---
Sample Date		Client Info		<b>27 Feb 2024</b>	---	---
Machine Age	kms	Client Info		<b>161552</b>	---	---
Oil Age	kms	Client Info		<b>0</b>	---	---
Filter Age	kms	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>220	<b>78</b>	---	---
Chromium	ppm	ASTM D5185(m)	>2	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>75	<b>66</b>	---	---
Lead	ppm	ASTM D5185(m)	>95	<b>15</b>	---	---
Copper	ppm	ASTM D5185(m)	>60	<b>20</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>4</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**










Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>25	<b>11</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>3</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<b>11</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>79</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>112</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>238</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>8</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>1377</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	33	<b>34.1</b>	---	---

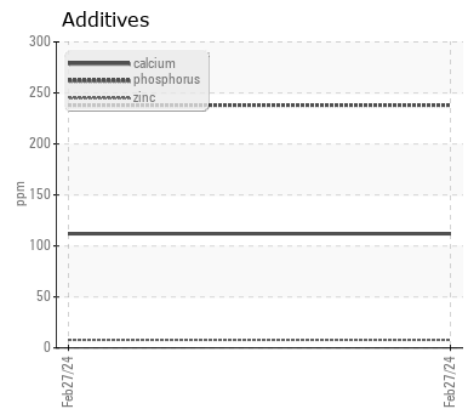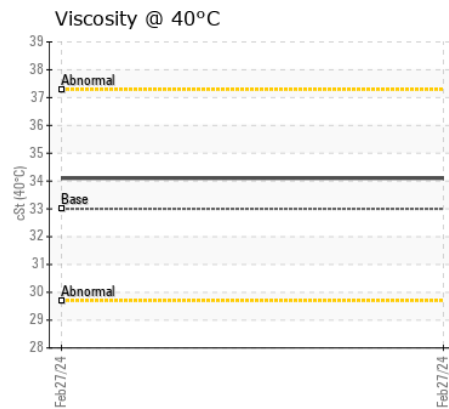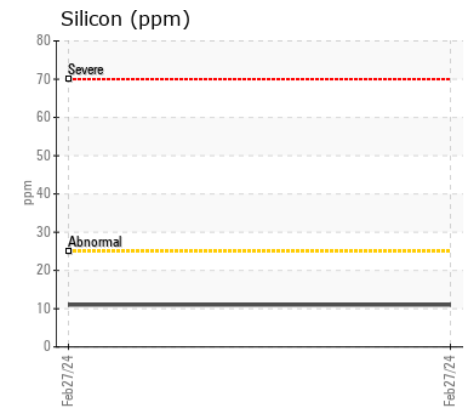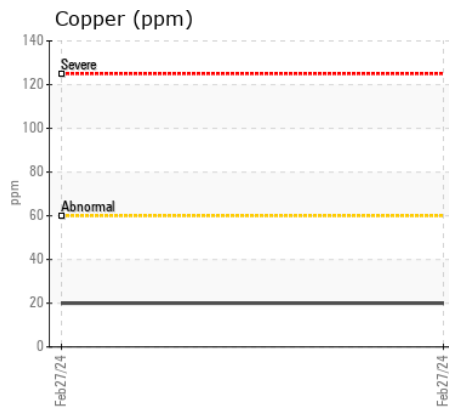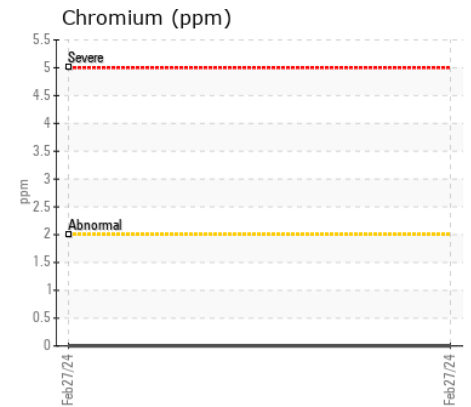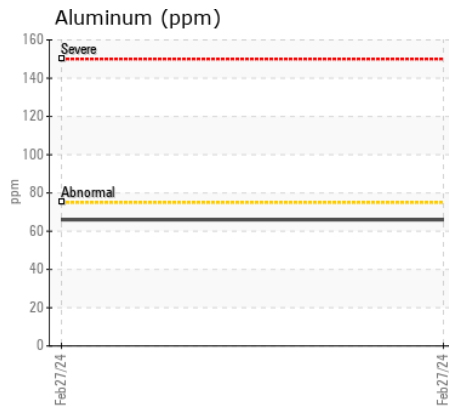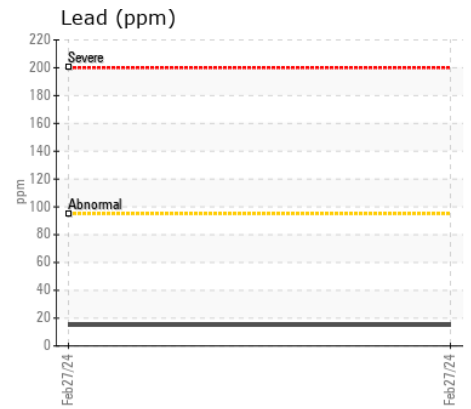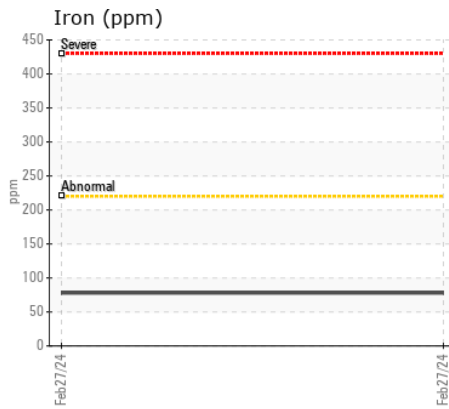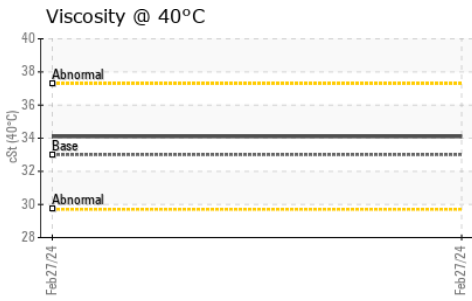

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0107649  
**Lab Number** : 02625352  
**Unique Number** : 5750471  
**Test Package** : MOB 1

**GFL Environmental - 747 - GMA - Solid Waste**  
 4 Chemin du Tremblay,  
 Boucherville, QC  
 CA J4B 6Z5  
 Contact: Steve Voyer  
 svoyer@matrec.ca

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.

T:  
F: