



# OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area

[14008111]

Machine Id

**BOP CRANE SW**

Component

**Gearbox**

Fluid

**MOBIL MOBILGEAR SHC 220 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

## WEAR

All component wear rates are normal.








## CONTAMINATION

There is no indication of any contamination in the oil.

## FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PP	---	---
Sample Date		Client Info		23 Feb 2024	---	---
Machine Age	hrs	Client Info		0	---	---
Oil Age	hrs	Client Info		0	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---
PQ		ASTM D8184*		11	---	---
Iron	ppm	ASTM D5185(m)	>200	12	---	---
Chromium	ppm	ASTM D5185(m)	>15	0	---	---
Nickel	ppm	ASTM D5185(m)	>15	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>25	0	---	---
Lead	ppm	ASTM D5185(m)	>100	0	---	---
Copper	ppm	ASTM D5185(m)	>200	<1	---	---
Tin	ppm	ASTM D5185(m)	>25	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	VLITE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---
Silicon	ppm	ASTM D5185(m)	>50	20	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.2	NEG	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	VLITE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---
Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)		3	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		12	---	---
Phosphorus	ppm	ASTM D5185(m)		421	---	---
Zinc	ppm	ASTM D5185(m)		2	---	---
Sulfur	ppm	ASTM D5185(m)		1265	---	---
Acid Number (AN)	mg KOH/g	ASTM D974*		0.72	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	220	214	---	---

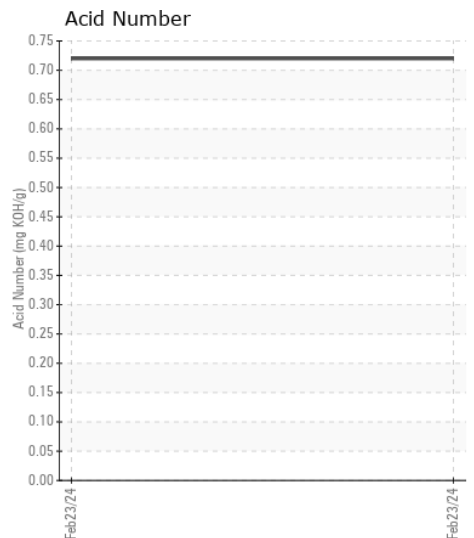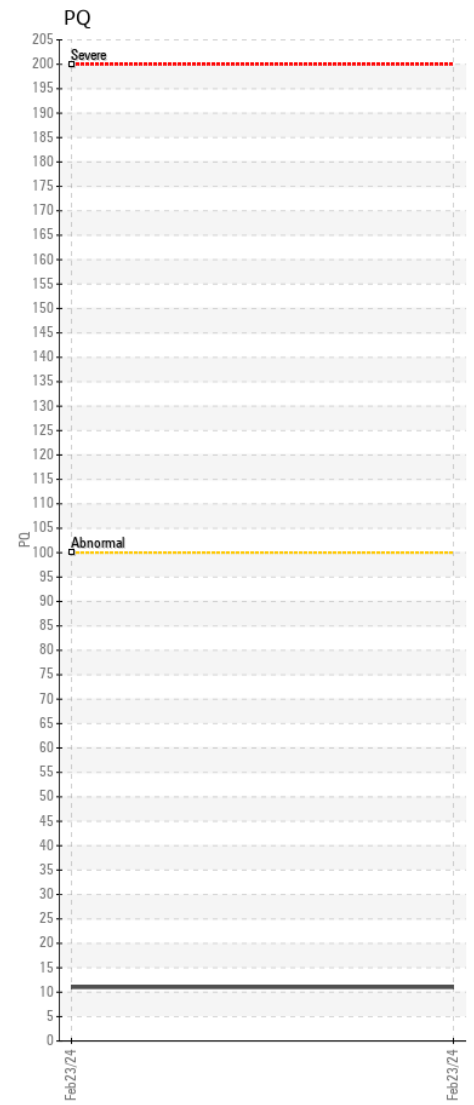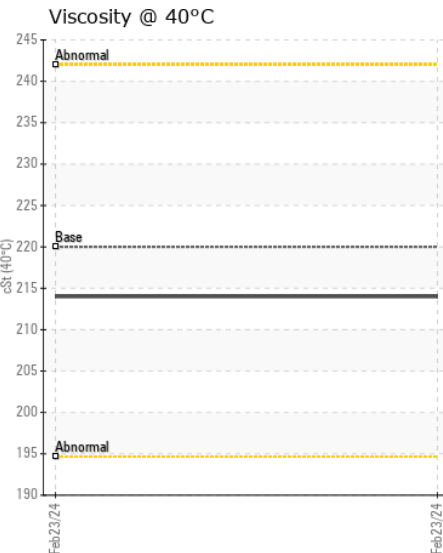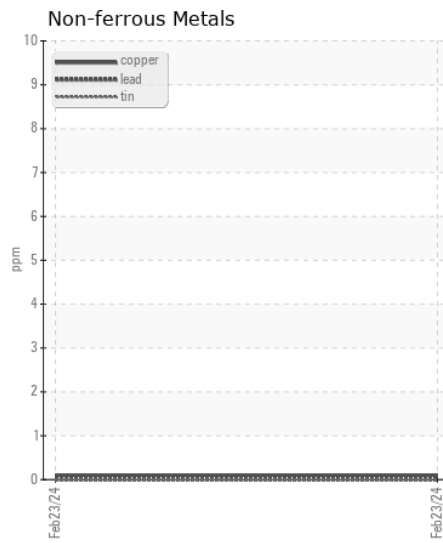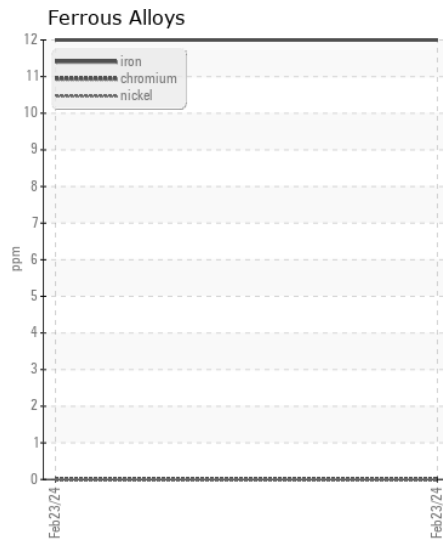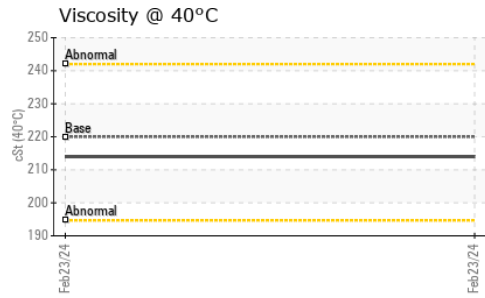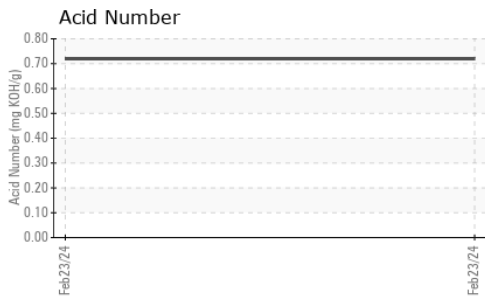

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : PP **Received** : 28 Mar 2024  
**Lab Number** : 02625428 **Tested** : 01 Apr 2024  
**Unique Number** : 5750547 **Diagnosed** : 01 Apr 2024 - Wes Davis  
**Test Package** : MAR 2 ( Additional Tests: TAN Man )

**KCA Deutag Drilling Canada Inc.**  
 Suite 201, 45 Hebron Way  
 St. John's, NL  
 CA A1A 0P9  
 Contact: Reg Costello  
 Hebron.MaintSuperintendent@kcadeutag.com  
 T: (709)778-6228  
 F: (709)730-1834

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.