



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Area
[14008111]
 Machine Id
BOP CRANE NE
 Component
Gearbox
 Fluid
MOBIL MOBILGEAR SHC 220 (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. NOTE: Please provide information regarding reservoir capacity, filter type and micron rating with next sample.

WEAR

All component wear rates are normal.









CONTAMINATION

There is no indication of any contamination in the oil.

FLUID CONDITION

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PP	PP	---
Sample Date		Client Info		23 Feb 2024	21 Nov 2023	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Filter Age	hrs	Client Info		0	0	---
Oil Changed		Client Info		N/A	N/A	---
Filter Changed		Client Info		N/A	N/A	---
Sample Status				NORMAL	NORMAL	---
PQ		ASTM D8184*		0	0	---
Iron	ppm	ASTM D5185(m)	>200	10	2	---
Chromium	ppm	ASTM D5185(m)	>15	0	0	---
Nickel	ppm	ASTM D5185(m)	>15	0	<1	---
Titanium	ppm	ASTM D5185(m)		0	0	---
Silver	ppm	ASTM D5185(m)		0	<1	---
Aluminum	ppm	ASTM D5185(m)	>25	<1	0	---
Lead	ppm	ASTM D5185(m)	>100	0	0	---
Copper	ppm	ASTM D5185(m)	>200	<1	<1	---
Tin	ppm	ASTM D5185(m)	>25	0	0	---
Vanadium	ppm	ASTM D5185(m)		0	0	---
White Metal	scalar	Visual*	NONE	VLITE	NONE	---
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	---
Silicon	ppm	ASTM D5185(m)	>50	21	21	---
Potassium	ppm	ASTM D5185(m)	>20	<1	0	---
Water		WC Method	>0.2	NEG	NEG	---
Silt	scalar	Visual*	NONE	NONE	NONE	---
Debris	scalar	Visual*	NONE	VLITE	VLITE	---
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	---
Appearance	scalar	Visual*	NORML	NORML	NORML	---
Odor	scalar	Visual*	NORML	NORML	NORML	---
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	---
Sodium	ppm	ASTM D5185(m)		<1	<1	---
Boron	ppm	ASTM D5185(m)		3	<1	---
Barium	ppm	ASTM D5185(m)		<1	<1	---
Molybdenum	ppm	ASTM D5185(m)		0	0	---
Manganese	ppm	ASTM D5185(m)		0	0	---
Magnesium	ppm	ASTM D5185(m)		<1	0	---
Calcium	ppm	ASTM D5185(m)		4	2	---
Phosphorus	ppm	ASTM D5185(m)		417	390	---
Zinc	ppm	ASTM D5185(m)		3	3	---
Sulfur	ppm	ASTM D5185(m)		1191	139	---
Acid Number (AN)	mg KOH/g	ASTM D974*		0.65	0.66	---
Visc @ 40°C	cSt	ASTM D7279(m)	220	214	216	---

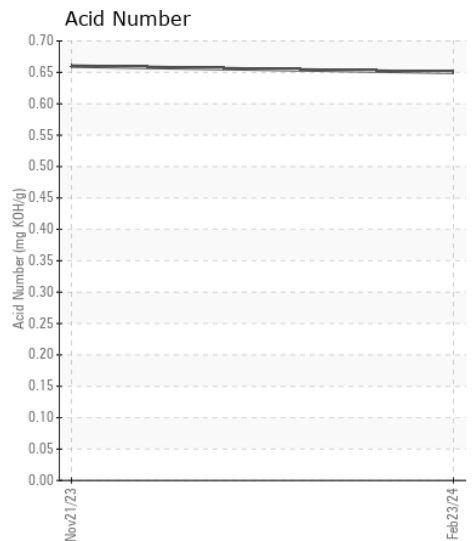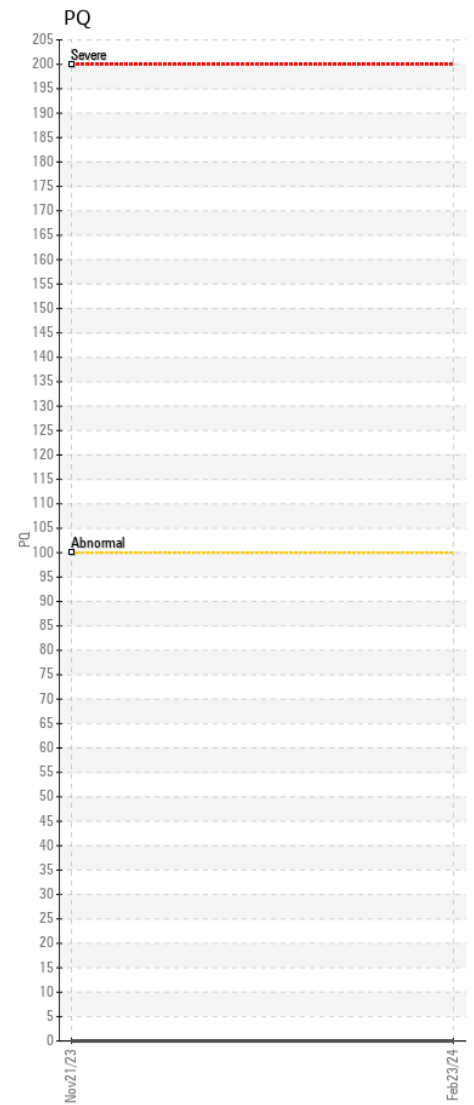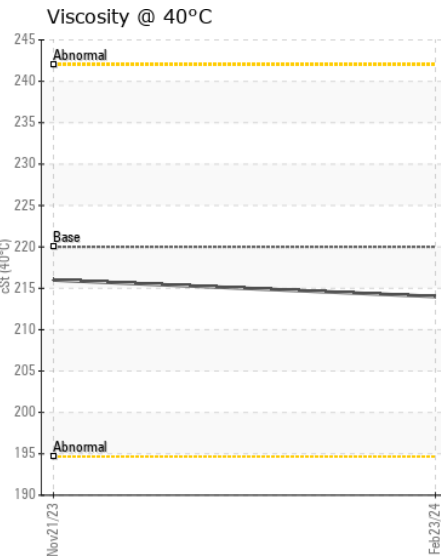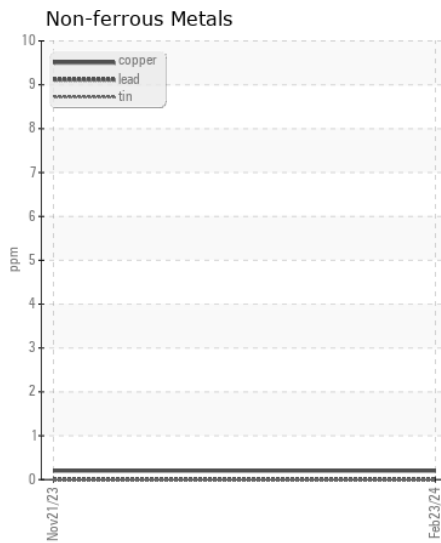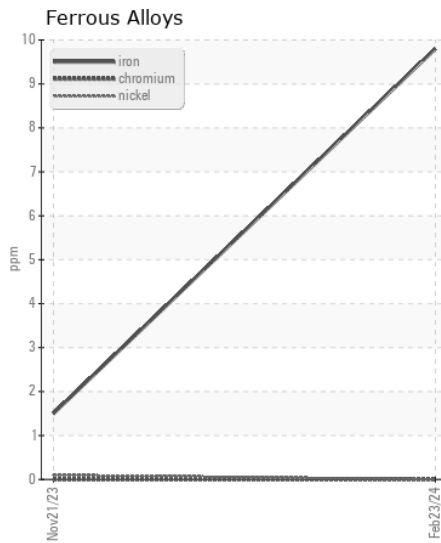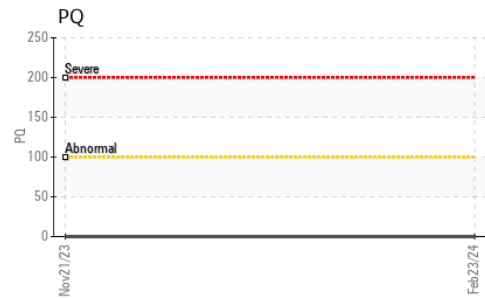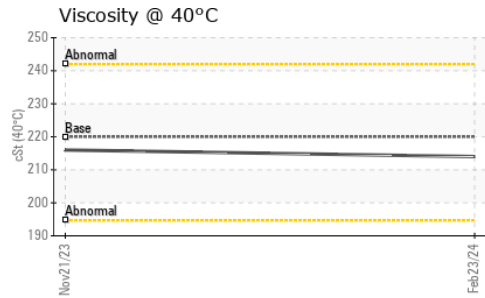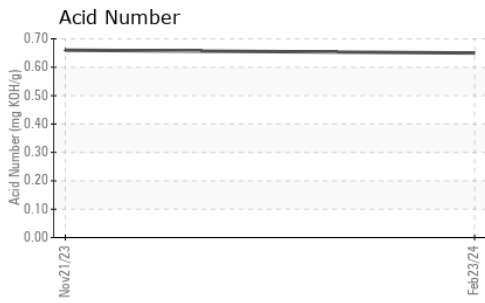

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PP **Received** : 28 Mar 2024
Lab Number : 02625430 **Tested** : 01 Apr 2024
Unique Number : 5750549 **Diagnosed** : 01 Apr 2024 - Wes Davis
Test Package : MAR 2 (Additional Tests: TAN Man)

KCA Deutag Drilling Canada Inc.
 Suite 201, 45 Hebron Way
 St. John's, NL
 CA A1A 0P9
 Contact: Reg Costello
 Hebron.MaintSuperintendent@kcadeutag.com
 T: (709)778-6228
 F: (709)730-1834

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.