



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**CASE 721E**  
 Component  
**Transmission**  
 Fluid  
**{not provided} (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

## WEAR

All component wear rates are normal.










## CONTAMINATION

There is no indication of any contamination in the fluid.

## FLUID CONDITION

The condition of the fluid is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC</b>	---	---
Sample Date		Client Info		<b>31 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Filter Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed		Client Info		<b>N/A</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---
Iron	ppm	ASTM D5185(m)	>500	<b>9</b>	---	---
Chromium	ppm	ASTM D5185(m)	>7	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>15	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m)	>350	<b>4</b>	---	---
Copper	ppm	ASTM D5185(m)	>300	<b>1</b>	---	---
Tin	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Silicon	ppm	ASTM D5185(m)	>25	<b>4</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---
Sodium	ppm	ASTM D5185(m)		<b>2</b>	---	---
Boron	ppm	ASTM D5185(m)		<b>192</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>16</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)		<b>102</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>3020</b>	---	---
Phosphorus	ppm	ASTM D5185(m)		<b>960</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>573</b>	---	---
Sulfur	ppm	ASTM D5185(m)		<b>3021</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		<b>62.7</b>	---	---

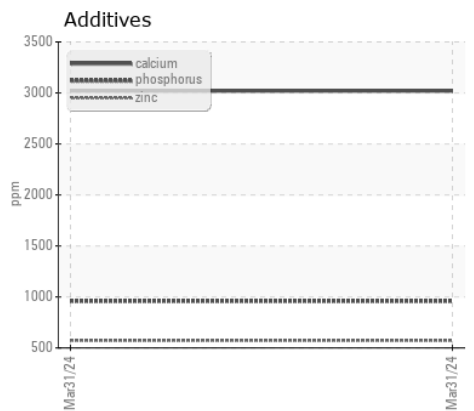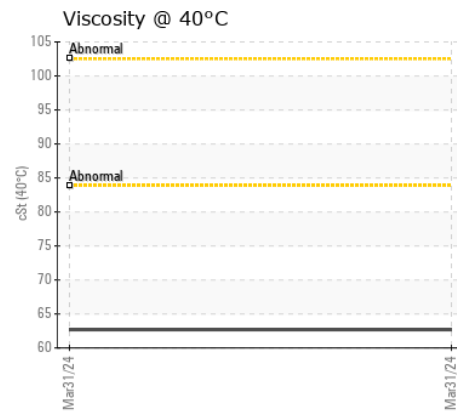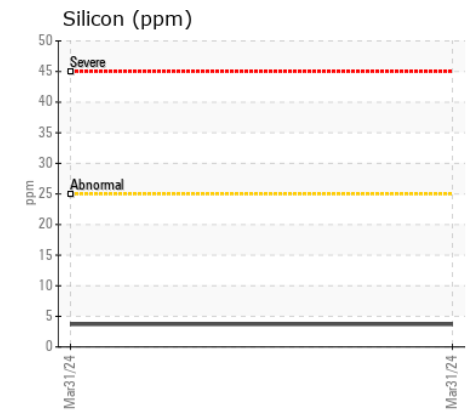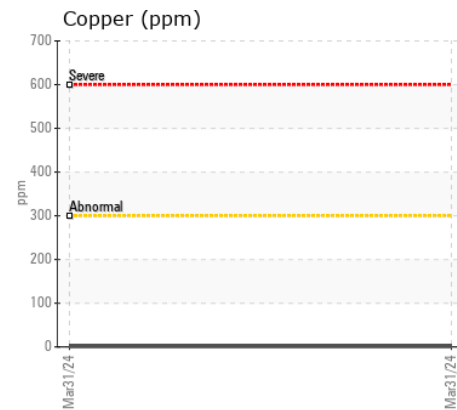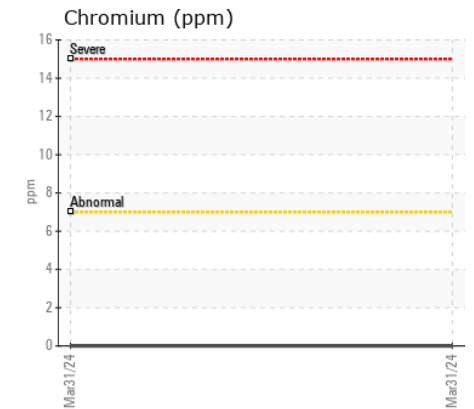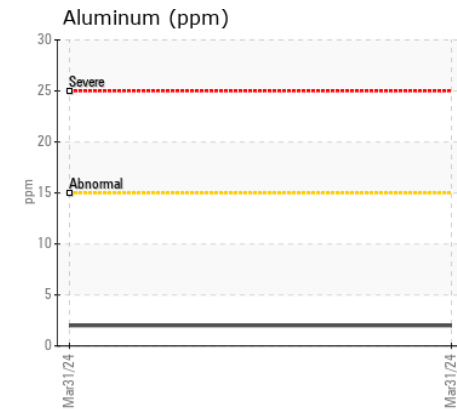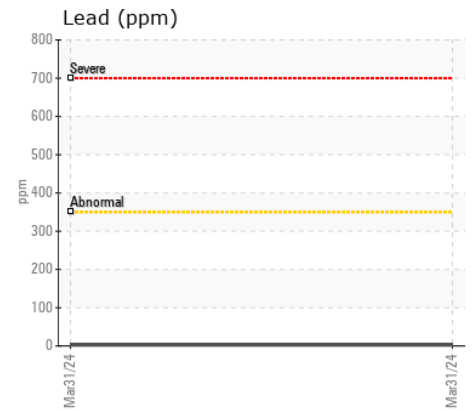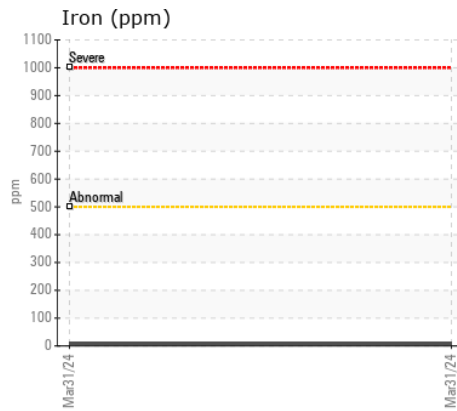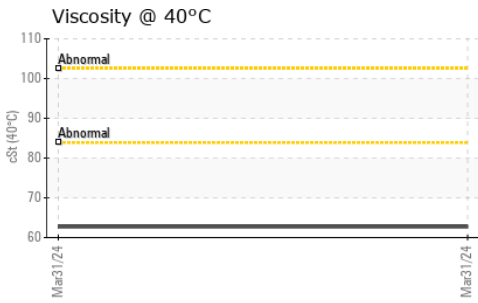

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC  
**Lab Number** : 02625739  
**Unique Number** : 5750858  
**Test Package** : MOB 1  
**Received** : 01 Apr 2024  
**Tested** : 01 Apr 2024  
**Diagnosed** : 01 Apr 2024 - Kevin Marson

**STRONGCO EQUIPMENT**  
 655 MOUNTDALE AVENUE  
 THUNDER BAY, ON  
 CA P7E 6E5  
 Contact: Jean-Luc Antier  
 jantier@strongco.com  
 T: (807)475-3052  
 F: (807)473-0921

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.