



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**213010**

Component  
**Transmission (Auto)**

Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

**RECOMMENDATION**

Échantillonner de nouveau l'équipement au prochain intervalle de vidange afin d'en surveiller la condition.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0107444</b>	---	---
Sample Date		Client Info		<b>26 Mar 2024</b>	---	---
Machine Age	hrs	Client Info		<b>4968</b>	---	---
Oil Age	hrs	Client Info		<b>2000</b>	---	---
Filter Age	hrs	Client Info		<b>500</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

Les taux d'usure de tous les composants sont normaux.

Iron	ppm	ASTM D5185(m)	>160	<b>28</b>	---	---
Chromium	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)	>5	<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>50	<b>8</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>26</b>	---	---
Copper	ppm	ASTM D5185(m)	>225	<b>22</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**











Il n'y a aucun indice de contamination dans le fluide.

Silicon	ppm	ASTM D5185(m)	>20	<b>3</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

L'état de le fluide est acceptable pour la durée de service.

Sodium	ppm	ASTM D5185(m)		<b>5</b>	---	---
Boron	ppm	ASTM D5185(m)	78	<b>112</b>	---	---
Barium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>3</b>	---	---
Magnesium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Calcium	ppm	ASTM D5185(m)	113	<b>44</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	222	<b>263</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>11</b>	---	---
Sulfur	ppm	ASTM D5185(m)	1326	<b>256</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	34.8	<b>36.8</b>	---	---

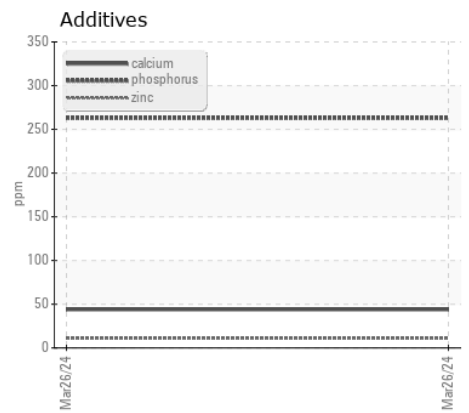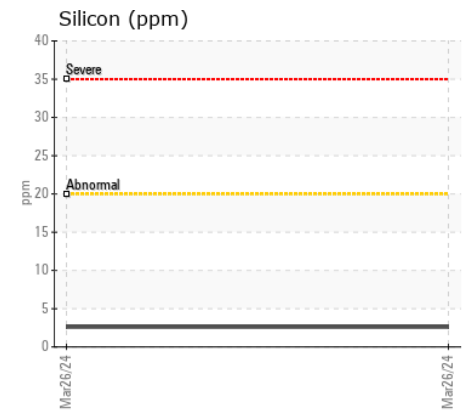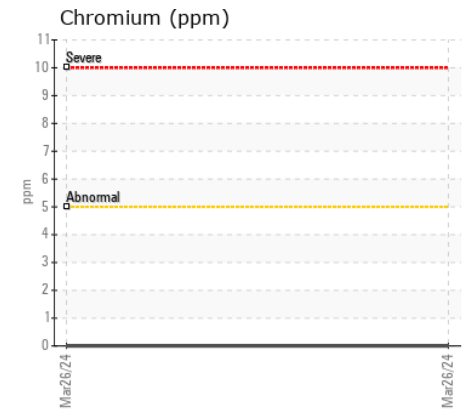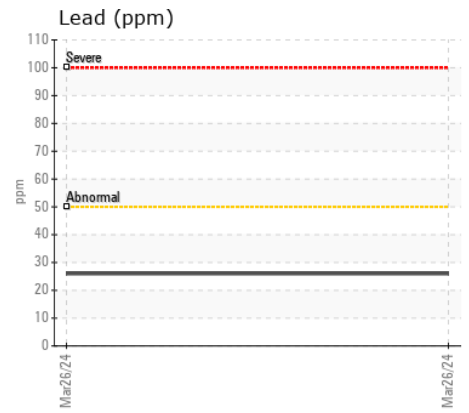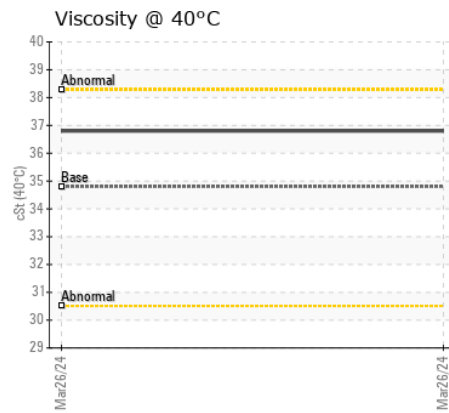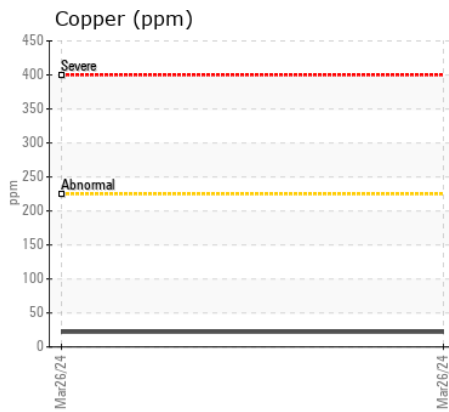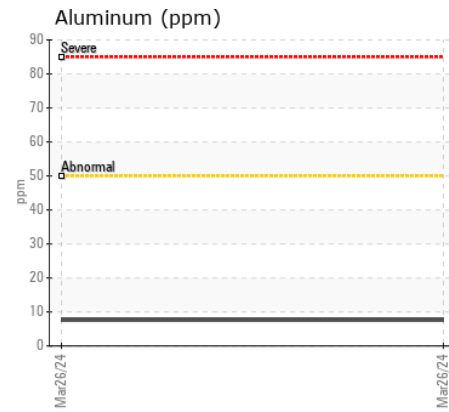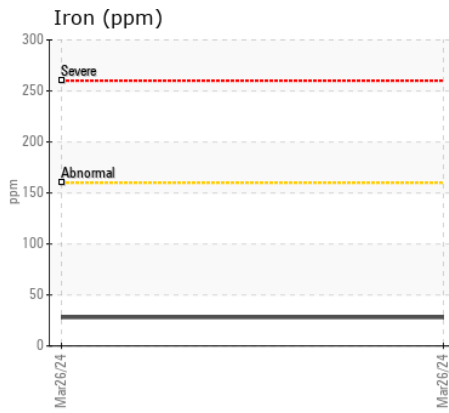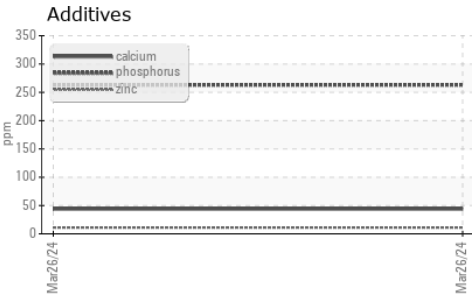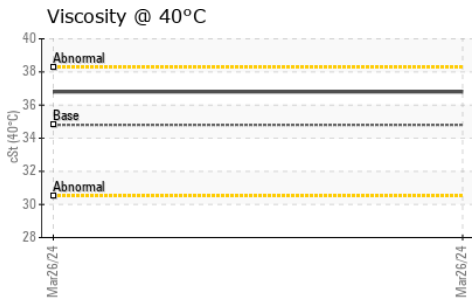

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0107444 **Received** : 01 Apr 2024  
**Lab Number** : 02625743 **Tested** : 01 Apr 2024  
**Unique Number** : 5750862 **Diagnosed** : 01 Apr 2024 - Wes Davis  
**Test Package** : MOB 1

**GFL Environmental - 772**  
 435 Montee Cushing  
 Brownsburg-Chatham, QC  
 CA J8G 1B9  
 Contact: Kelly-Ann Forbes  
 kforbes@matrec.ca  
 T: (450)566-3721  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.