



Machine Id
901089
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0111992	GFL0090419	GFL0071478
Sample Date		Client Info		28 Mar 2024	17 Oct 2023	20 Jul 2023
Machine Age	kms	Client Info		215697	200128	190936
Oil Age	kms	Client Info		0	0	0
Filter Age	kms	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	12	6	10
Chromium	ppm	ASTM D5185(m)	>20	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	0
Titanium	ppm	ASTM D5185(m)	>2	0	0	0
Silver	ppm	ASTM D5185(m)	>2	0	<1	<1
Aluminum	ppm	ASTM D5185(m)	>20	2	1	2
Lead	ppm	ASTM D5185(m)	>40	0	<1	<1
Copper	ppm	ASTM D5185(m)	>330	<1	<1	2
Tin	ppm	ASTM D5185(m)	>15	0	0	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	2	3	2
Potassium	ppm	ASTM D5185(m)	>20	<1	1	<1
Fuel		WC Method	>3.0	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>4	0.4	0.2	0.3
Nitration	Abs/cm	ASTM D7624*	>20	9.5	7.8	8.2
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.6	20.3	20.7
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		4	4	4
Boron	ppm	ASTM D5185(m)	0	2	21	3
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	60	60	50	60
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	1010	988	816	998
Calcium	ppm	ASTM D5185(m)	1070	1102	1420	1058
Phosphorus	ppm	ASTM D5185(m)	1150	969	1007	1031
Zinc	ppm	ASTM D5185(m)	1270	1205	1275	1218
Sulfur	ppm	ASTM D5185(m)	2060	2328	2506	2282
Oxidation	Abs/.1mm	ASTM D7414*	>25	17.6	16.5	16.6
Visc @ 100°C	cSt	ASTM D7279(m)	15.4	13.4	14.0	13.7

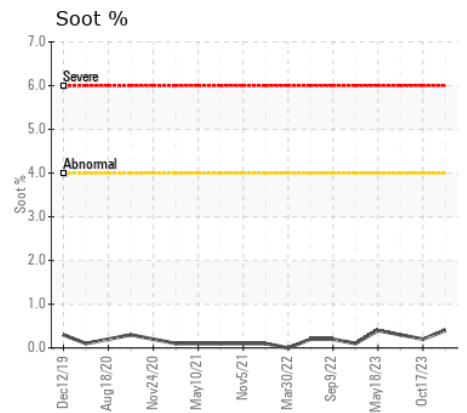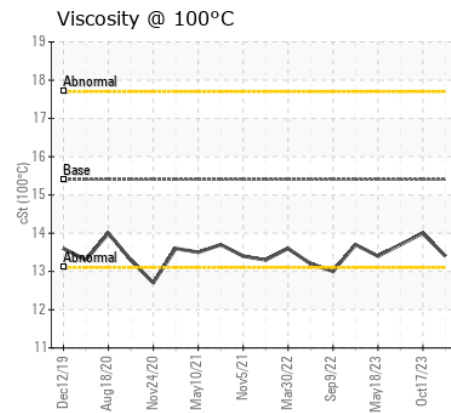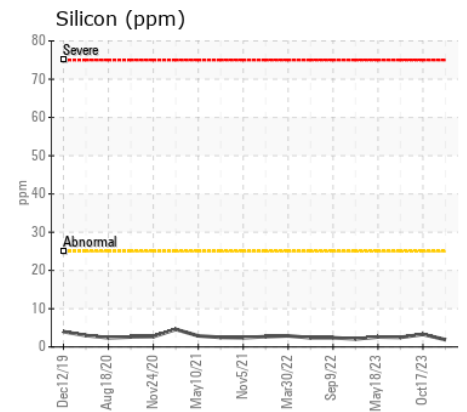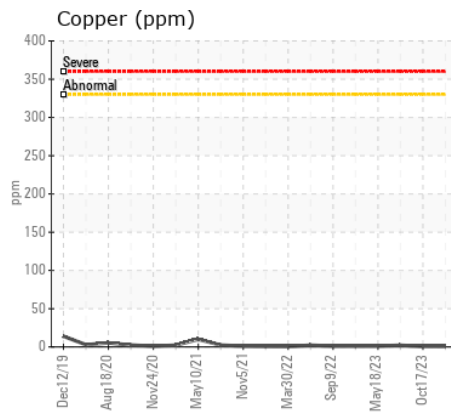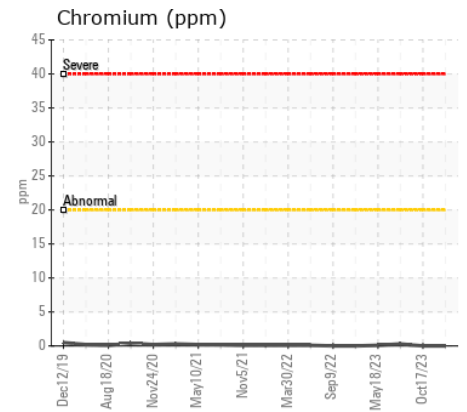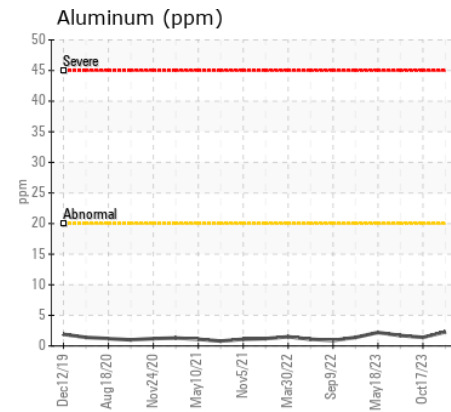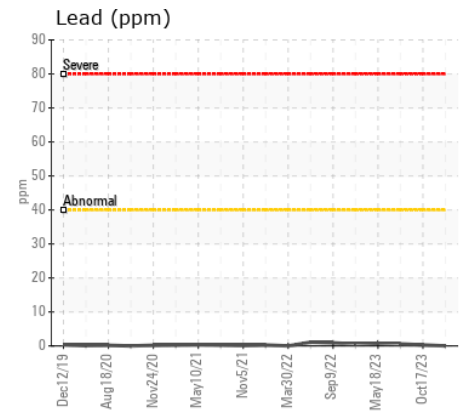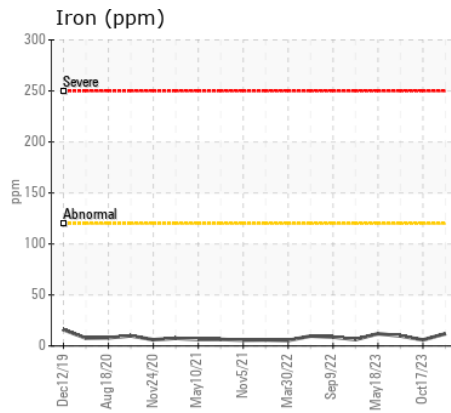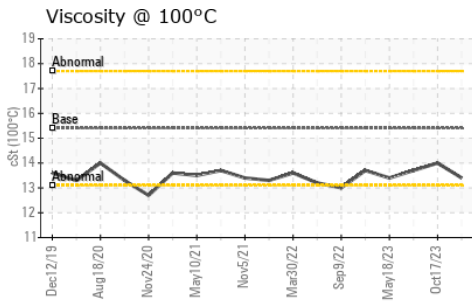

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0111992
Lab Number : 02625995
Unique Number : 5759127
Test Package : MOB 1
Received : 02 Apr 2024
Tested : 02 Apr 2024
Diagnosed : 02 Apr 2024 - Wes Davis

GFL Environmental - 216M
 2475 Beryl Drive
 Oakville, ON
 CA L6J 7X4
 Contact: Matthew Gunness
 mgunness@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T:
F: