



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Area
(340261)
Machine Id
LIEBHERR LH80M 127769-1218
Component
Diesel Engine
Fluid
PETRO CANADA DURON UHP E6 10W40 (40 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0276200	LH0278827	LH0202925
Sample Date		Client Info		01 Apr 2024	14 Nov 2023	05 Sep 2023
Machine Age	hrs	Client Info		13601	12136	11630
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		N/A	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	5	6	4
Chromium	ppm	ASTM D5185(m)	>5	0	0	<1
Nickel	ppm	ASTM D5185(m)	>5	0	0	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)	>3	0	<1	0
Aluminum	ppm	ASTM D5185(m)	>15	1	3	2
Lead	ppm	ASTM D5185(m)	>30	0	<1	<1
Copper	ppm	ASTM D5185(m)	>125	1	2	1
Tin	ppm	ASTM D5185(m)	>5	0	<1	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>60	4	3	5
Potassium	ppm	ASTM D5185(m)	>20	<1	1	3
Fuel		WC Method	>5	<1.0	<1.0	<1.0
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
Soot %	%	ASTM D7844*	>3	0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	10.1	9.6	9.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	20.6	19.6	20.7
Silt	scalar	Visual*	NONE	NONE	VLITE	NONE
Debris	scalar	Visual*	NONE	VLITE	NONE	VLITE
Sand/Dirt	scalar	Visual*	NONE	NONE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.2	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		1	<1	2
Boron	ppm	ASTM D5185(m)	0	4	4	3
Barium	ppm	ASTM D5185(m)	0	0	<1	0
Molybdenum	ppm	ASTM D5185(m)	0	60	60	59
Manganese	ppm	ASTM D5185(m)	0	0	0	<1
Magnesium	ppm	ASTM D5185(m)	80	987	981	985
Calcium	ppm	ASTM D5185(m)	2400	1113	1080	1074
Phosphorus	ppm	ASTM D5185(m)	750	993	998	1069
Zinc	ppm	ASTM D5185(m)	840	1227	1211	1216
Sulfur	ppm	ASTM D5185(m)	2130	2464	2495	2537
Oxidation	Abs/.1mm	ASTM D7414*	>25	20.4	17.4	17.3
Visc @ 100°C	cSt	ASTM D7279(m)	14.2	13.2	13.5	13.5

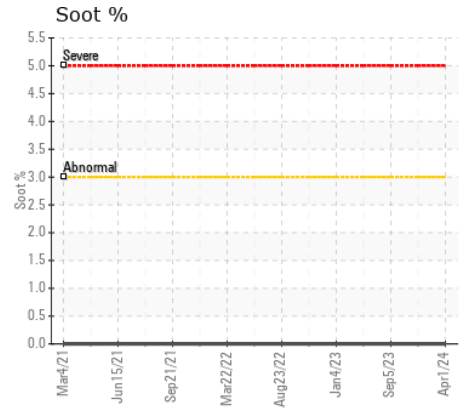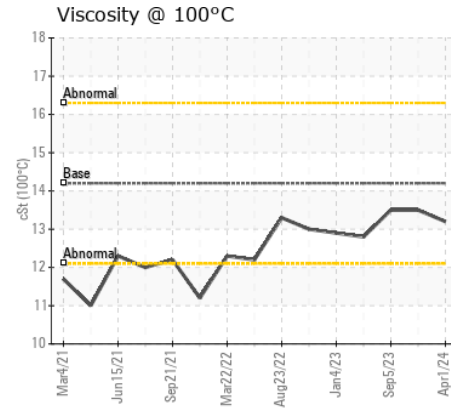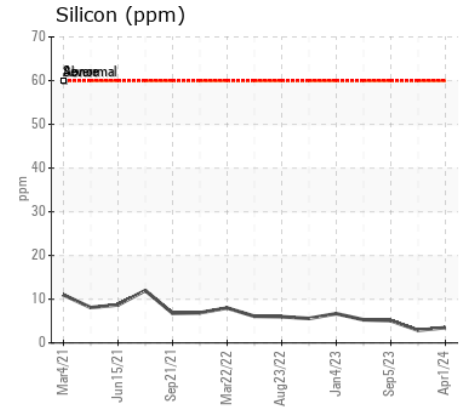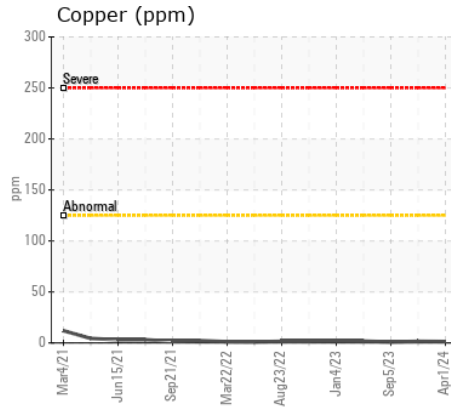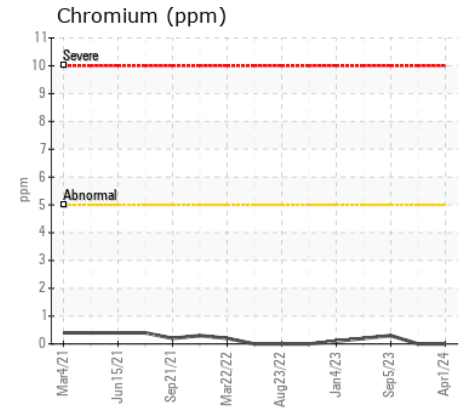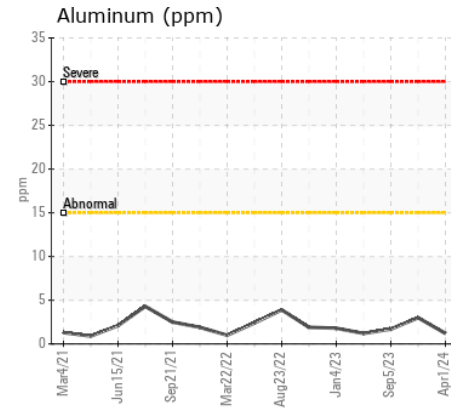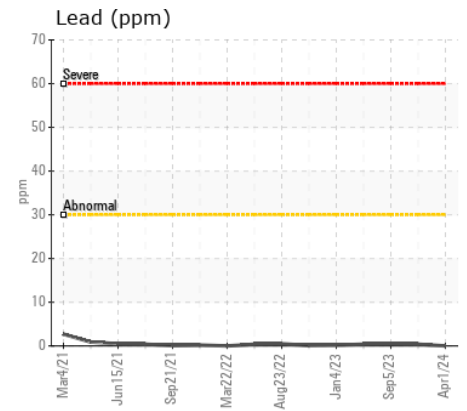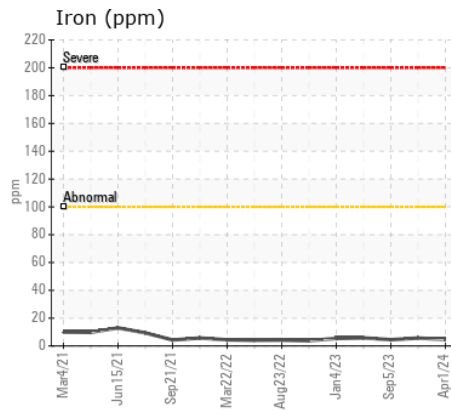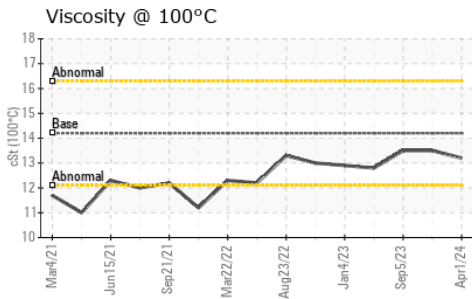

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0276200 **Received** : 02 Apr 2024
Lab Number : 02626040 **Tested** : 02 Apr 2024
Unique Number : 5759172 **Diagnosed** : 02 Apr 2024 - Wes Davis
Test Package : MOB 1 (Additional Tests: Visual)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

GERDAU AMERISTEEL
 1 GERDAU COURT
 WHITBY, ON
 CA L1N 5T1
 Contact: Tyson Young
 tyoung@gerdauameristeel.com
 T: (905)668-8811
 F: (905)668-6469