



# OIL ANALYSIS REPORT

WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>NORMAL</b>

Machine Id  
**1359**  
 Component  
**Rear Diesel Engine**  
 Fluid  
**PETRO CANADA DURON HP 15W40 (--- GAL)**

## RECOMMENDATION

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>WC0925705</b>	WC0895787	WC0882999
Sample Date		Client Info		<b>01 Apr 2024</b>	30 Jan 2024	04 Dec 2023
Machine Age	hrs	Client Info		<b>43083</b>	42511	41978
Oil Age	hrs	Client Info		<b>573</b>	534	571
Filter Age	hrs	Client Info		<b>573</b>	0	0
Oil Changed		Client Info		<b>Changed</b>	Changed	Changed
Filter Changed		Client Info		<b>Changed</b>	Changed	Changed
Sample Status				<b>NORMAL</b>	MARGINAL	MARGINAL

## WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	<b>11</b>	9	10
Chromium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185(m)	>4	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185(m)		<b>0</b>	0	0
Silver	ppm	ASTM D5185(m)	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<b>1</b>	2	1
Lead	ppm	ASTM D5185(m)	>40	<b>0</b>	0	0
Copper	ppm	ASTM D5185(m)	>330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185(m)	>15	<b>0</b>	0	0
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	0	0

## CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	<b>2</b>	3	3
Potassium	ppm	ASTM D5185(m)	>20	<b>&lt;1</b>	<1	1
Fuel		WC Method	>5	<b>&lt;1.0</b>	▲ 3.5	▲ 2.7
Water		WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol		WC Method		<b>NEG</b>	NEG	NEG
Soot %	%	ASTM D7844*	>3	<b>0.6</b>	0.5	0.5
Nitration	Abs/cm	ASTM D7624*	>20	<b>9.3</b>	9.2	9.5
Sulfation	Abs/.1mm	ASTM D7415*	>30	<b>22.2</b>	22.6	26.1
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	NEG	NEG

## FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>6</b>	5	8
Boron	ppm	ASTM D5185(m)	0	<b>2</b>	2	1
Barium	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185(m)	60	<b>59</b>	57	58
Manganese	ppm	ASTM D5185(m)	0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185(m)	1010	<b>975</b>	937	931
Calcium	ppm	ASTM D5185(m)	1070	<b>1055</b>	1038	1027
Phosphorus	ppm	ASTM D5185(m)	1150	<b>984</b>	992	930
Zinc	ppm	ASTM D5185(m)	1270	<b>1182</b>	1145	1111
Sulfur	ppm	ASTM D5185(m)	2060	<b>2449</b>	2624	2588
Oxidation	Abs/.1mm	ASTM D7414*	>25	<b>20.1</b>	20.9	29.3
Visc @ 100°C	cSt	ASTM D7279(m)	15.6	<b>13.5</b>	13.1	12.8

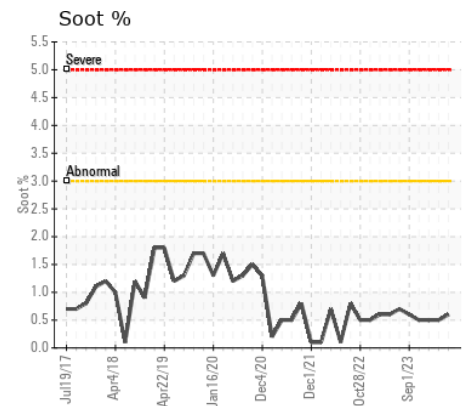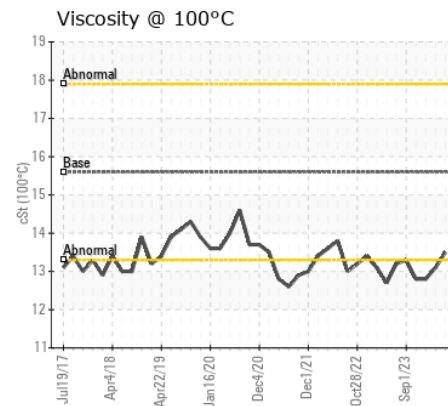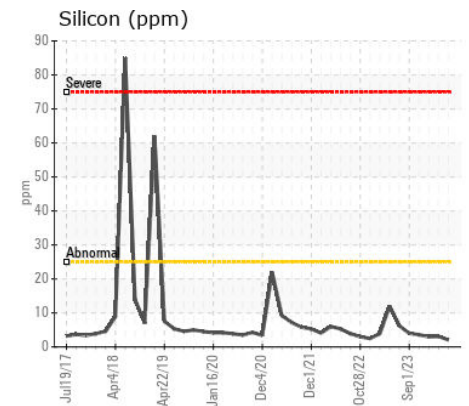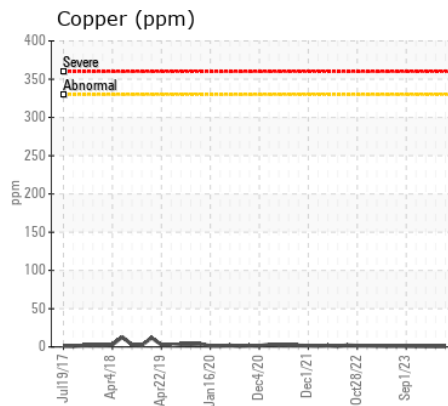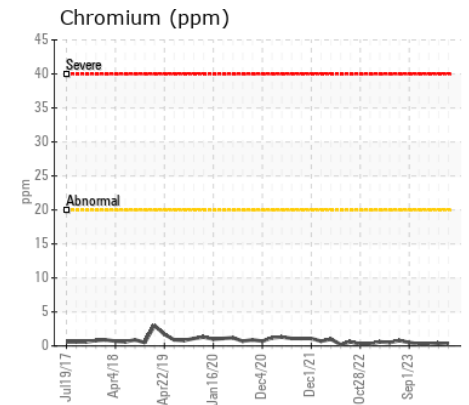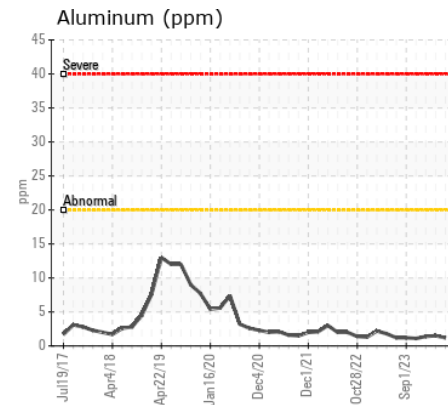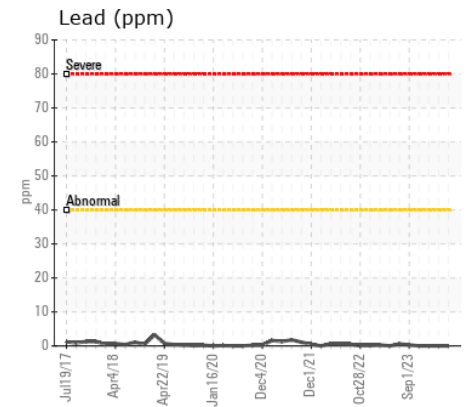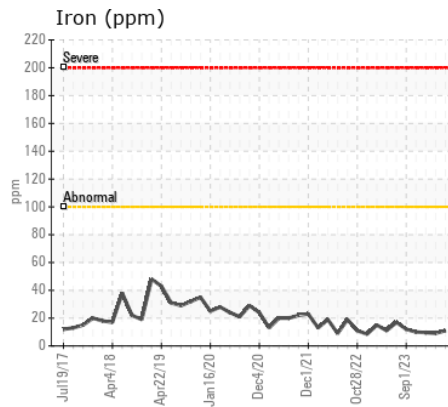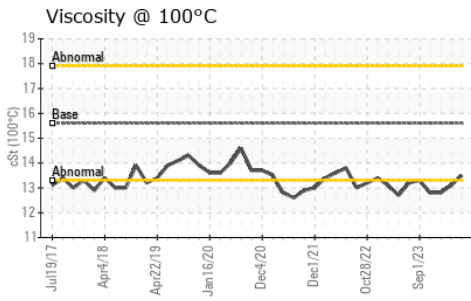

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : WC0925705 **Received** : 03 Apr 2024  
**Lab Number** : 02626352 **Tested** : 03 Apr 2024  
**Unique Number** : 5759484 **Diagnosed** : 03 Apr 2024 - Wes Davis  
**Test Package** : MOB 1

**KINGSTON TRANSIT**  
 1181 JOHN COUNTER BLVD  
 KINGSTON, ON  
 CA K7K 6C7  
 Contact: Brent Gunter  
 bgunter@cityofkingston.ca  
 T: (613)546-4291  
 F: (613)542-1504

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.