



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
130-1702
Component
Front Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 10W30 (--- GAL)

RECOMMENDATION

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		PC0088752	---	---
Sample Date		Client Info		25 Mar 2024	---	---
Machine Age	kms	Client Info		286332	---	---
Oil Age	kms	Client Info		25000	---	---
Filter Age	kms	Client Info		25000	---	---
Oil Changed		Client Info		Changed	---	---
Filter Changed		Client Info		Changed	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>120	7	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>15	0	---	---
Titanium	ppm	ASTM D5185(m)	>2	0	---	---
Silver	ppm	ASTM D5185(m)	>3	0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	2	---	---
Lead	ppm	ASTM D5185(m)	>40	0	---	---
Copper	ppm	ASTM D5185(m)	>330	<1	---	---
Tin	ppm	ASTM D5185(m)	>15	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---

CONTAMINATION











Fuel content negligible. There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	3	---	---
Potassium	ppm	ASTM D5185(m)	>20	2	---	---
Fuel	%	ASTM D7593*	>3.0	0.9	---	---
Water		WC Method	>0.2	NEG	---	---
Glycol		WC Method		NEG	---	---
Soot %	%	ASTM D7844*	>4	0.1	---	---
Nitration	Abs/cm	ASTM D7624*	>20	9.4	---	---
Sulfation	Abs/.1mm	ASTM D7415*	>30	19.9	---	---
Emulsified Water	scalar	Visual*	>0.2	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		2	---	---
Boron	ppm	ASTM D5185(m)	250	45	---	---
Barium	ppm	ASTM D5185(m)	10	<1	---	---
Molybdenum	ppm	ASTM D5185(m)	100	11	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)	450	760	---	---
Calcium	ppm	ASTM D5185(m)	3000	1295	---	---
Phosphorus	ppm	ASTM D5185(m)	1150	721	---	---
Zinc	ppm	ASTM D5185(m)	1350	808	---	---
Sulfur	ppm	ASTM D5185(m)	4250	2413	---	---
Oxidation	Abs/.1mm	ASTM D7414*	>25	14.4	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	73	79.8	---	---
Visc @ 100°C	cSt	ASTM D7279(m)	10.9	11.6	---	---
Viscosity Index (VI)	Scale	ASTM D2270*	138	137	---	---

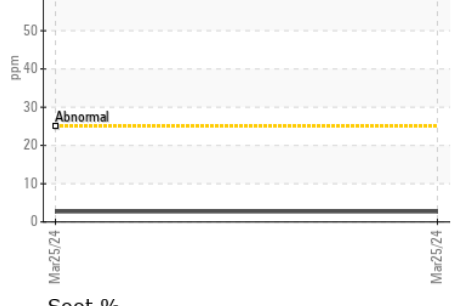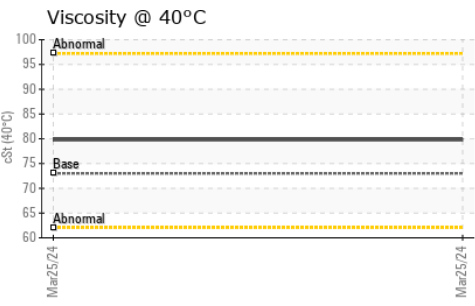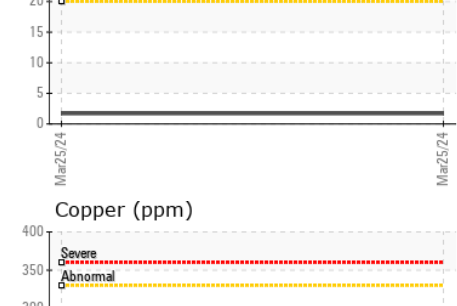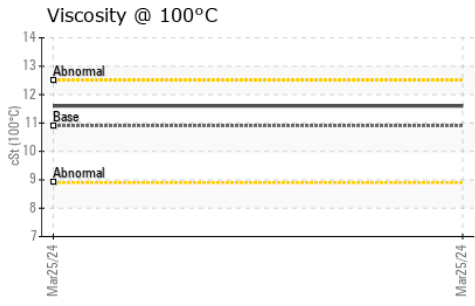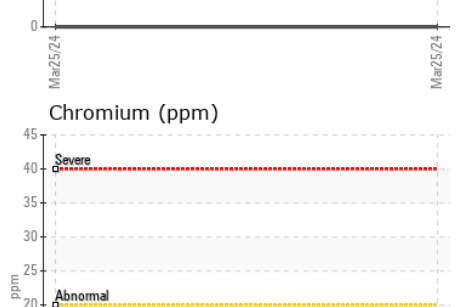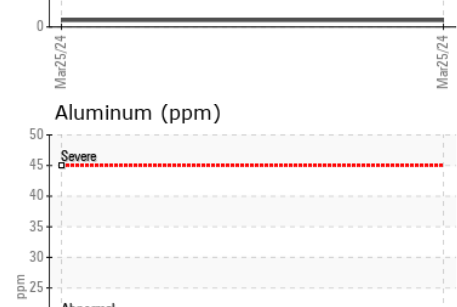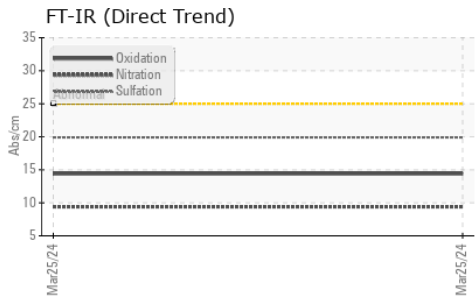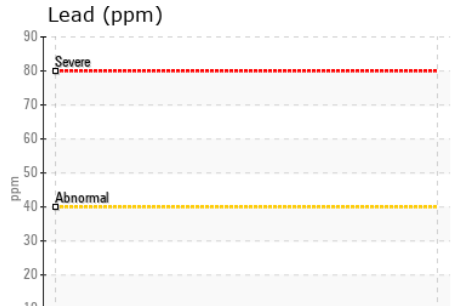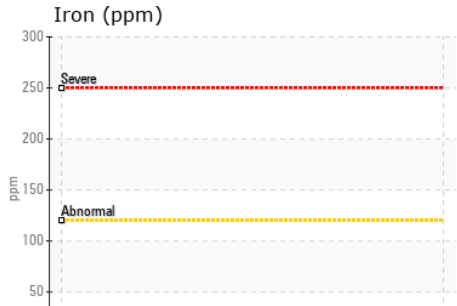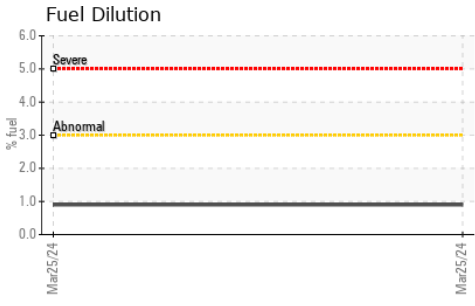

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : PC0088752 **Received** : 03 Apr 2024
Lab Number : 02626358 **Tested** : 04 Apr 2024
Unique Number : 5759490 **Diagnosed** : 04 Apr 2024 - Kevin Marson
Test Package : MOB 1 (Additional Tests: FuelDilution, KV40, PercentFuel, VI)

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

LAVIS CONTRACTING
 37462A HURON ROAD
 CLINTON, ON
 CA N0M 1L0
 Contact: Doug Francis
 dfrancis@lavis.ca
 T: (519)482-3694
 F: (519)482-7886