



WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
9174
Component
Natural Gas Engine
Fluid
PETRO CANADA DURON GEO LD 15W40 (24 LTR)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		GFL0094415	GFL0086773	GFL0048917
Sample Date		Client Info		02 Apr 2024	01 Sep 2023	28 Mar 2022
Machine Age	hrs	Client Info		90563	0	14659
Oil Age	hrs	Client Info		90563	0	0
Filter Age	hrs	Client Info		90563	0	0
Oil Changed		Client Info		Changed	N/A	Changed
Filter Changed		Client Info		Changed	N/A	Changed
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>50	28	46	22
Chromium	ppm	ASTM D5185(m)	>5	2	2	3
Nickel	ppm	ASTM D5185(m)	>4	<1	1	<1
Titanium	ppm	ASTM D5185(m)	>5	0	<1	0
Silver	ppm	ASTM D5185(m)	>3	0	0	0
Aluminum	ppm	ASTM D5185(m)	>25	4	5	8
Lead	ppm	ASTM D5185(m)	>40	0	<1	2
Copper	ppm	ASTM D5185(m)	>150	1	1	1
Tin	ppm	ASTM D5185(m)	>4	0	<1	<1
Vanadium	ppm	ASTM D5185(m)		0	0	0

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>25	4	12	5
Potassium	ppm	ASTM D5185(m)	>20	<1	1	<1
Water		WC Method	>0.1	NEG	NEG	NEG
Soot %	%	ASTM D7844*		0	0	0
Nitration	Abs/cm	ASTM D7624*	>20	12.2	11.7	5.0
Sulfation	Abs/.1mm	ASTM D7415*	>30	24.5	25.0	15.6
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		5	6	8
Boron	ppm	ASTM D5185(m)	50	7	8	7
Barium	ppm	ASTM D5185(m)	5	0	0	0
Molybdenum	ppm	ASTM D5185(m)	50	53	57	55
Manganese	ppm	ASTM D5185(m)	0	0	1	<1
Magnesium	ppm	ASTM D5185(m)	560	554	557	636
Calcium	ppm	ASTM D5185(m)	1510	1562	1547	1594
Phosphorus	ppm	ASTM D5185(m)	780	703	762	752
Zinc	ppm	ASTM D5185(m)	870	900	907	965
Sulfur	ppm	ASTM D5185(m)	2040	1963	1967	2015
Oxidation	Abs/.1mm	ASTM D7414*	>25	19.4	19.4	8.1
Visc @ 100°C	cSt	ASTM D7279(m)	15.1	14.2	14.8	14.9

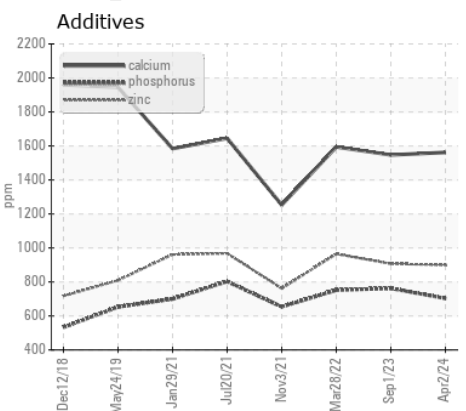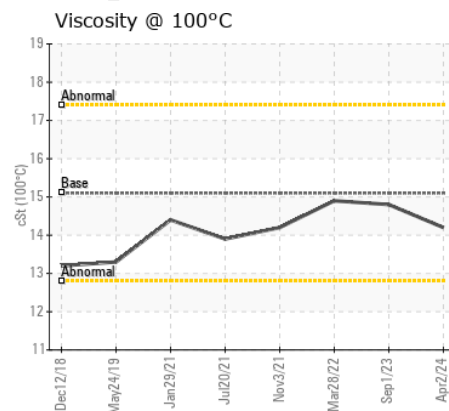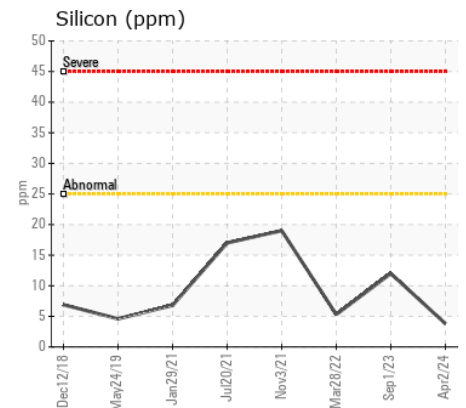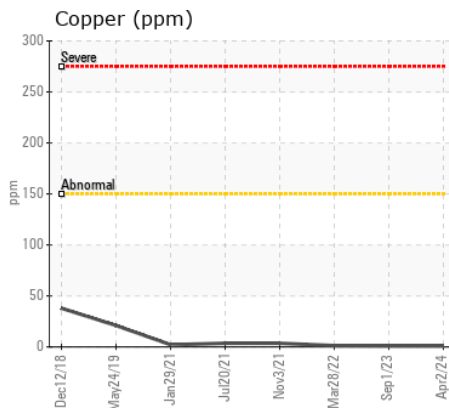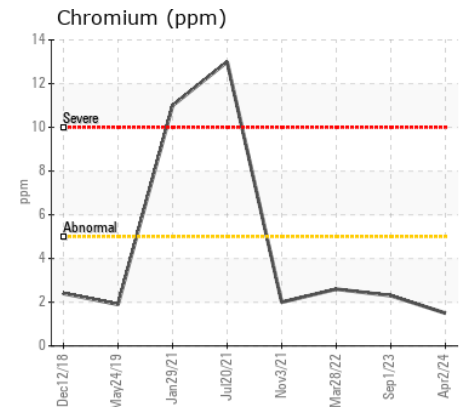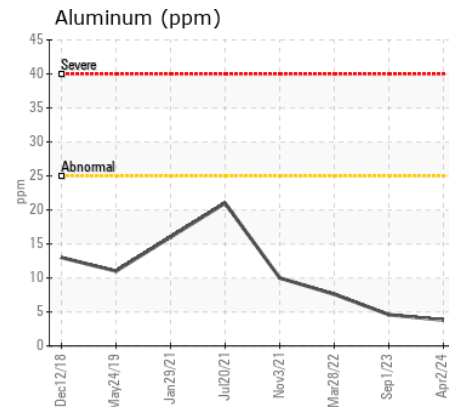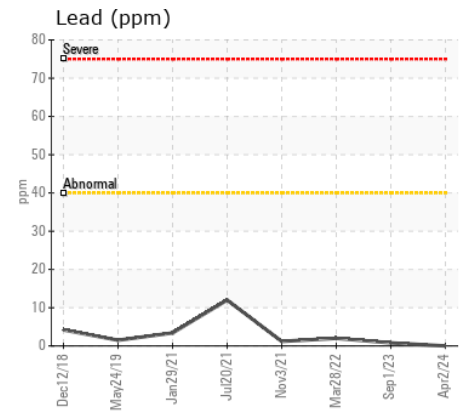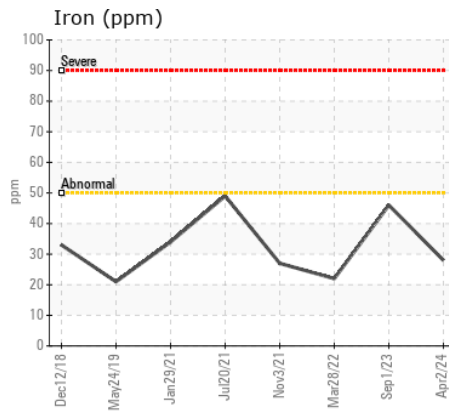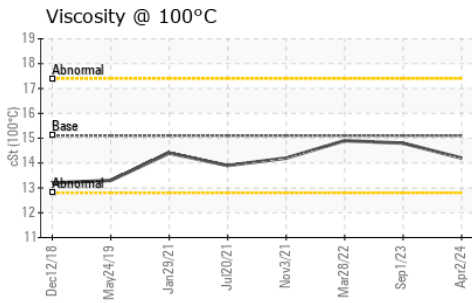

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : GFL0094415 **Received** : 03 Apr 2024
Lab Number : 02626414 **Tested** : 03 Apr 2024
Unique Number : 5759546 **Diagnosed** : 03 Apr 2024 - Wes Davis
Test Package : MOB 1

GFL Environmental - 222 - Sandhill
 SANDHILL DISPOSAL & RECYCLING DIVIS, 19 COMMERCE ROAD
 ORANGEVILLE, ON
 CA L9W 3X5
 Contact: GLENN COOK
 gcook@gflenv.com
 T: (519)940-4167
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.