



WEAR	<b>NORMAL</b>
CONTAMINATION	<b>NORMAL</b>
FLUID CONDITION	<b>ABNORMAL</b>

Machine Id

**Or1979**

Component

**Transmission**

Fluid

**PETRO CANADA DURATRAN SYNTHETIC (75 LTR)**

**RECOMMENDATION**

Confirm the source of the lubricant being utilized for top-up/fill. Resample at the next service interval to monitor. The fluid was specified as PETRO CANADA DURATRAN SYNTHETIC, however, a fluid match indicates that this fluid is SAE 10W Diesel Engine Oil. Please confirm the fluid type and grade on your next sample. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0113385</b>	---	---
Sample Date		Client Info		<b>01 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>16204</b>	---	---
Oil Age	hrs	Client Info		<b>16204</b>	---	---
Filter Age	hrs	Client Info		<b>16204</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>Changed</b>	---	---
Sample Status				<b>ABNORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>200	<b>15</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Nickel	ppm	ASTM D5185(m)		<b>0</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>0</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>50	<b>2</b>	---	---
Lead	ppm	ASTM D5185(m)	>50	<b>3</b>	---	---
Copper	ppm	ASTM D5185(m)	>200	<b>45</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**











There is no indication of any contamination in the fluid.

Silicon	ppm	ASTM D5185(m)	>50	<b>5</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>1</b>	---	---
Water		WC Method	>0.1	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.1	<b>NEG</b>	---	---

**FLUID CONDITION**

The fluid viscosity is lower than typical, possibly indicating the addition of lighter grade fluid. This plus the additive levels indicates that this is not the same brand, or type of oil as reported. The condition of the fluid is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>6</b>	---	---
Boron	ppm	ASTM D5185(m)	112	<b>27</b>	---	---
Barium	ppm	ASTM D5185(m)	0	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)	0	<b>1</b>	---	---
Manganese	ppm	ASTM D5185(m)	1	<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	13	<b>9</b>	---	---
Calcium	ppm	ASTM D5185(m)	3777	<b>3385</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1240	<b>947</b>	---	---
Zinc	ppm	ASTM D5185(m)	1513	<b>901</b>	---	---
Sulfur	ppm	ASTM D5185(m)	2716	<b>3166</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	46.79	<b>▲ 35.3</b>	---	---

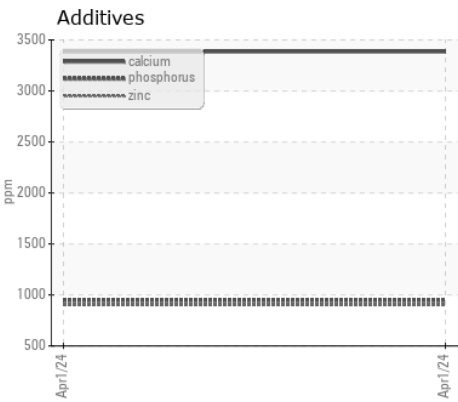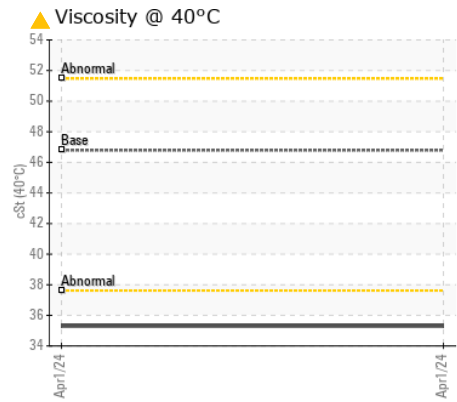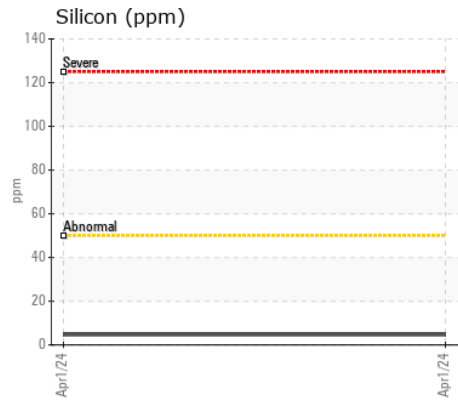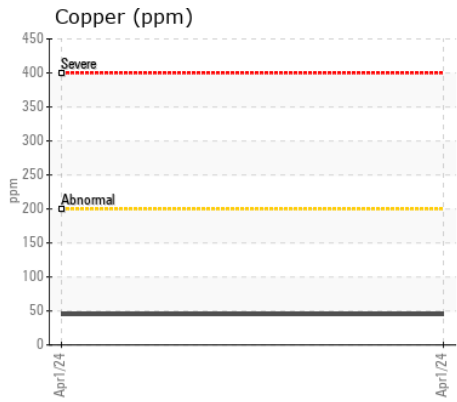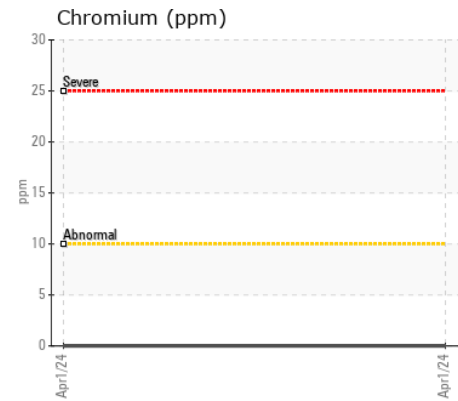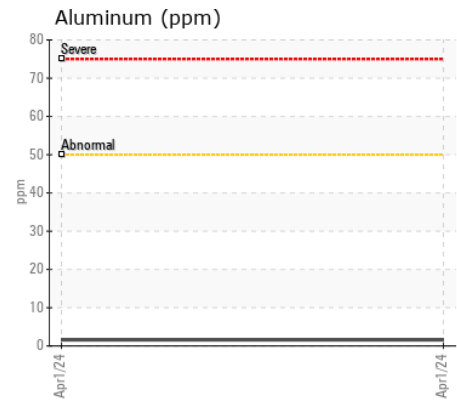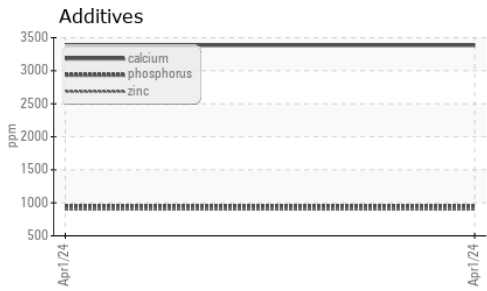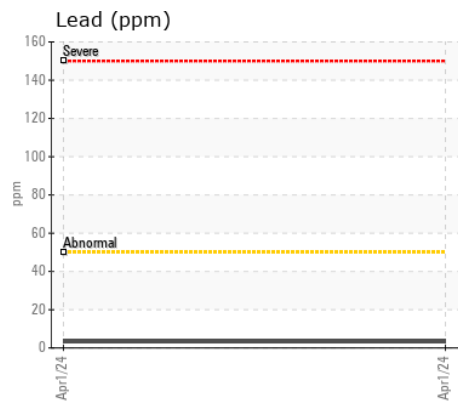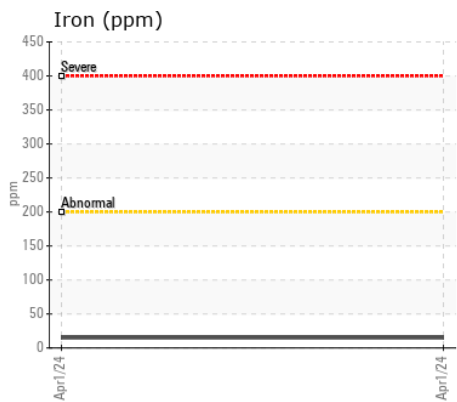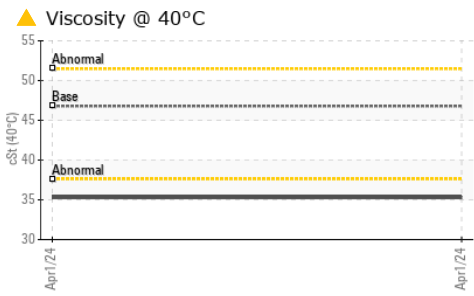

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113385 **Received** : 03 Apr 2024  
**Lab Number** : 02626448 **Tested** : 03 Apr 2024  
**Unique Number** : 5759580 **Diagnosed** : 03 Apr 2024 - Kevin Marson  
**Test Package** : MOB 1

**GFL Environmental - 720 - Lafleche - Landfill**  
 17125 Lafleche Road,  
 Moose Creek, ON  
 CA K0C 1W0  
 Contact: Charles Bergeron  
 cbergeron@gflenv.com  
 T: (613)538-4853  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.