

Machine Id  
**Or1979**  
Component  
**Front Left Final Drive**  
Fluid  
**PETRO CANADA TRAXON E SYNTHETIC 75W-90 (10 LTR)**

**RECOMMENDATION**

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		<b>GFL0113386</b>	---	---
Sample Date		Client Info		<b>01 Apr 2024</b>	---	---
Machine Age	hrs	Client Info		<b>16204</b>	---	---
Oil Age	hrs	Client Info		<b>16204</b>	---	---
Filter Age	hrs	Client Info		<b>16204</b>	---	---
Oil Changed		Client Info		<b>Changed</b>	---	---
Filter Changed		Client Info		<b>N/A</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

**WEAR**

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>500	<b>80</b>	---	---
Chromium	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185(m)	>10	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185(m)		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185(m)		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185(m)	>25	<b>3</b>	---	---
Lead	ppm	ASTM D5185(m)	>25	<b>0</b>	---	---
Copper	ppm	ASTM D5185(m)	>50	<b>&lt;1</b>	---	---
Tin	ppm	ASTM D5185(m)	>10	<b>0</b>	---	---
Vanadium	ppm	ASTM D5185(m)		<b>0</b>	---	---
White Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	Visual*	NONE	<b>NONE</b>	---	---

**CONTAMINATION**










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>75	<b>26</b>	---	---
Potassium	ppm	ASTM D5185(m)	>20	<b>2</b>	---	---
Water		WC Method	>0.2	<b>NEG</b>	---	---
Silt	scalar	Visual*	NONE	<b>VLITE</b>	---	---
Debris	scalar	Visual*	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	Visual*	NONE	<b>NONE</b>	---	---
Appearance	scalar	Visual*	NORML	<b>NORML</b>	---	---
Odor	scalar	Visual*	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	Visual*	>0.2	<b>NEG</b>	---	---

**FLUID CONDITION**

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<b>5</b>	---	---
Boron	ppm	ASTM D5185(m)	229	<b>172</b>	---	---
Barium	ppm	ASTM D5185(m)	<1	<b>&lt;1</b>	---	---
Molybdenum	ppm	ASTM D5185(m)		<b>0</b>	---	---
Manganese	ppm	ASTM D5185(m)		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185(m)	<1	<b>2</b>	---	---
Calcium	ppm	ASTM D5185(m)		<b>21</b>	---	---
Phosphorus	ppm	ASTM D5185(m)	1355	<b>980</b>	---	---
Zinc	ppm	ASTM D5185(m)		<b>8</b>	---	---
Sulfur	ppm	ASTM D5185(m)	22698	<b>17264</b>	---	---
Visc @ 40°C	cSt	ASTM D7279(m)	100.8	<b>339</b>	---	---

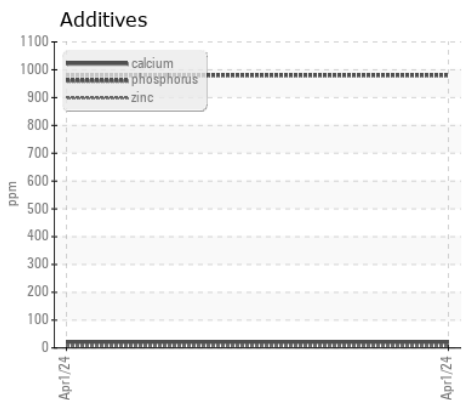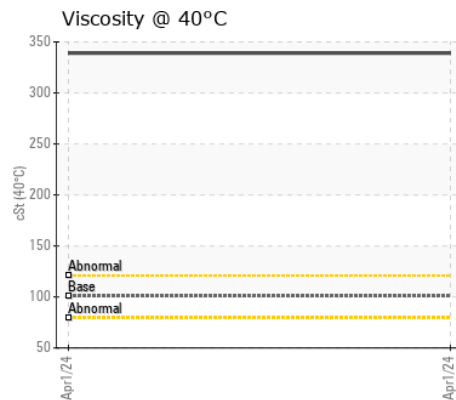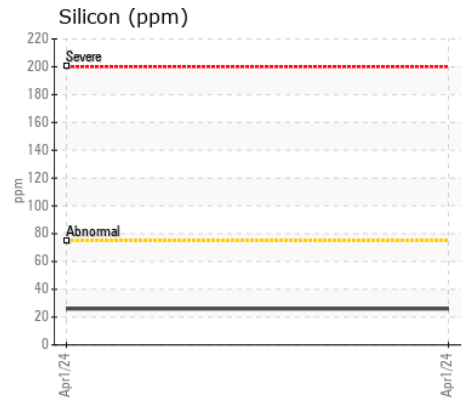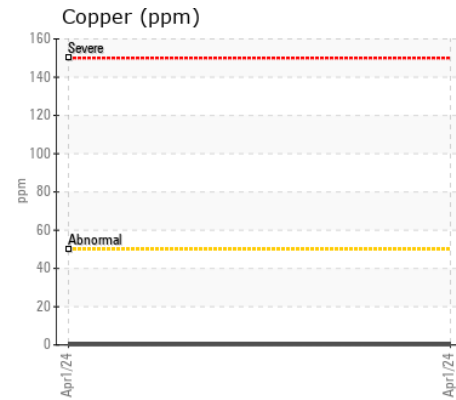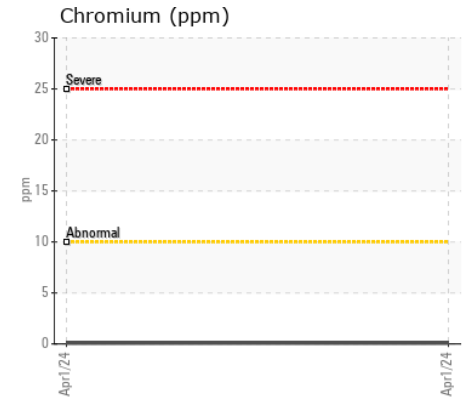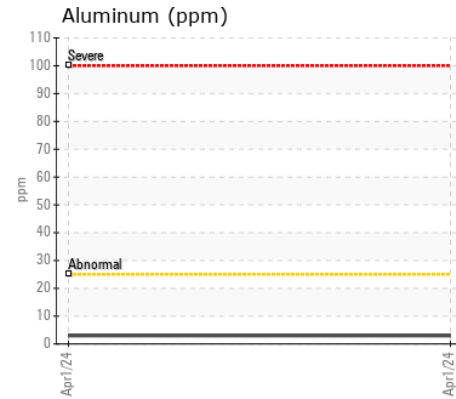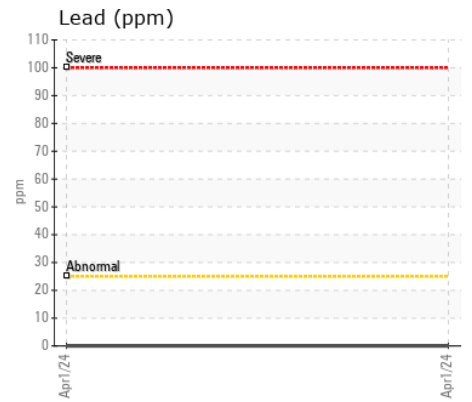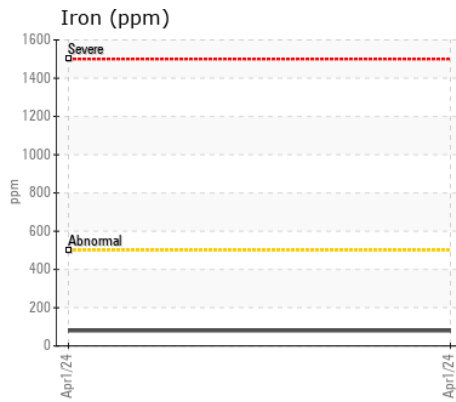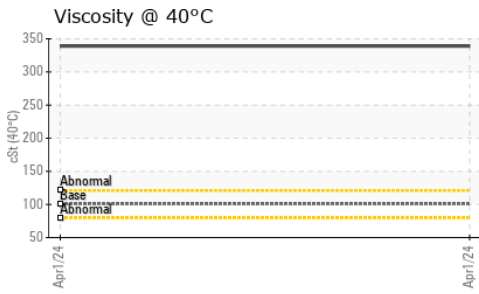

**Laboratory** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**Sample No.** : GFL0113386  
**Lab Number** : 02626468  
**Unique Number** : 5759600  
**Test Package** : MOB 1  
**Received** : 03 Apr 2024  
**Tested** : 03 Apr 2024  
**Diagnosed** : 03 Apr 2024 - Wes Davis

**GFL Environmental - 720 - Lafleche - Landfill**  
 17125 Lafleche Road,  
 Moose Creek, ON  
 CA K0C 1W0  
 Contact: Charles Bergeron  
 cbergeron@gflenv.com  
 T: (613)538-4853  
 F:

To discuss this sample report, contact Customer Service at 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 Validity of results and interpretation are based on the sample and information as supplied.