



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	ATTENTION
FLUID CONDITION	NORMAL

Machine Id
086418 SUMMIT SIX DRIVE TENSION

Component
Hydraulic System

Fluid
MOBIL DTE 10 EXCEL 32 (--- GAL)

RECOMMENDATION

We recommend you service the filters on this component. Resample at the next service interval to monitor.

WEAR

All component wear rates are normal.

CONTAMINATION

There is a light amount of silt (particulates < 14 microns in size) present in the oil.

FLUID CONDITION







The condition of the oil is acceptable for the time in service.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0922039	WC0800981	WC0679935
Sample Date		Client Info		25 Mar 2024	28 Mar 2023	25 Mar 2022
Machine Age	hrs	Client Info		18516	17154	15921
Oil Age	hrs	Client Info		3800	2438	1205
Filter Age	hrs	Client Info		3800	2438	1205
Oil Changed		Client Info		N/A	N/A	N/A
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				ATTENTION	ATTENTION	ABNORMAL

Iron	ppm	ASTM D5185(m)	>20	0	<1	0
Chromium	ppm	ASTM D5185(m)	>20	0	0	0
Nickel	ppm	ASTM D5185(m)	>20	0	<1	0
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	0	0	0
Lead	ppm	ASTM D5185(m)	>20	0	0	0
Copper	ppm	ASTM D5185(m)	>20	<1	<1	<1
Tin	ppm	ASTM D5185(m)	>20	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

Silicon	ppm	ASTM D5185(m)	>15	0	0	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	<1	<1
Water		WC Method	>0.05	NEG	NEG	NEG
Particles >4µm		ASTM D7647	>5000	6711	6456	10872
Particles >6µm		ASTM D7647	>1300	1596	1402	2842
Particles >14µm		ASTM D7647	>160	93	57	245
Particles >21µm		ASTM D7647	>40	24	8	56
Particles >38µm		ASTM D7647	>10	2	0	3
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	20/18/14	20/18/13	21/19/15
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.05	NEG	NEG	NEG

Sodium	ppm	ASTM D5185(m)		<1	1	<1
Boron	ppm	ASTM D5185(m)		0	<1	<1
Barium	ppm	ASTM D5185(m)		0	0	0
Molybdenum	ppm	ASTM D5185(m)		0	0	0
Manganese	ppm	ASTM D5185(m)		0	0	0
Magnesium	ppm	ASTM D5185(m)		<1	<1	<1
Calcium	ppm	ASTM D5185(m)	120	115	120	115
Phosphorus	ppm	ASTM D5185(m)	475	452	491	474
Zinc	ppm	ASTM D5185(m)		7	6	6
Sulfur	ppm	ASTM D5185(m)	1275	1141	1203	1162
Visc @ 40°C	cSt	ASTM D7279(m)	32	31.6	31.0	32.1

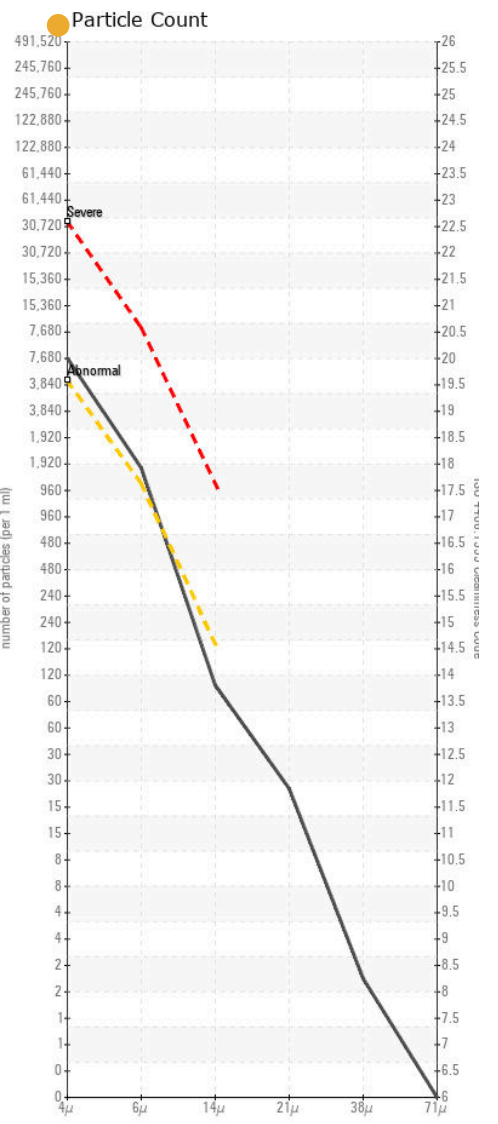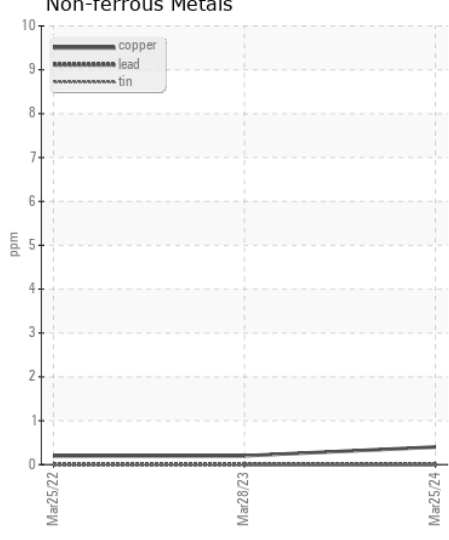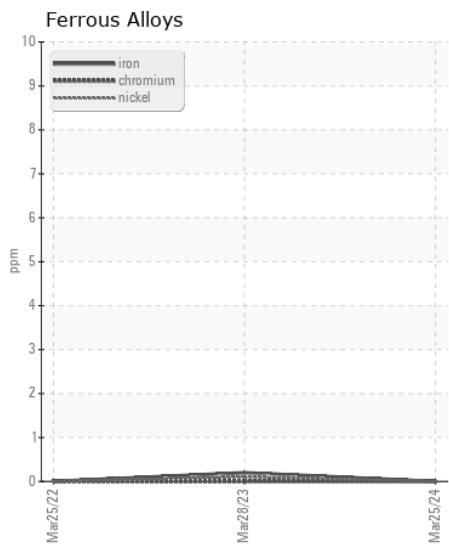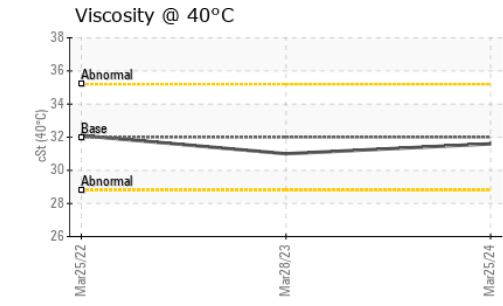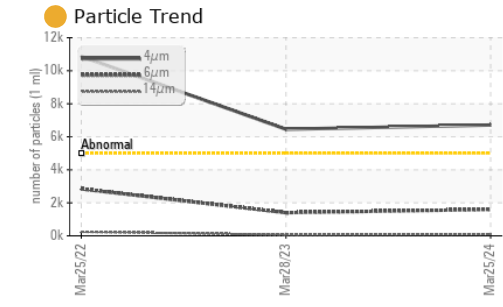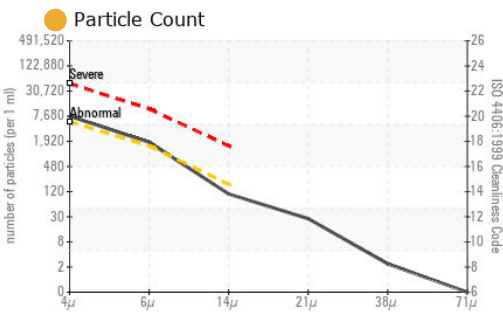

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0922039
Lab Number : 02626682
Unique Number : 5759814
Test Package : MOB 2
Received : 04 Apr 2024
Tested : 05 Apr 2024
Diagnosed : 05 Apr 2024 - Wes Davis

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Mount St. Louis Moonstone
 R.R. # 4,, 24 Mount St. Louis Road
 Coldwater, ON
 CA L0K 1E0
 Contact: Andre Huter
 a.huter@mslm.on.ca
 T: (705)835-2112
 F: (705)835-5967