



OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL

Machine Id
100023135 TENSION SYSTEM
Component
Hydraulic System
Fluid
DOPPELMAYR SYNT 70T (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor. Please submit a sample of the new (unused) oil to establish a baseline.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		WC0922035	---	---
Sample Date		Client Info		03 Apr 2024	---	---
Machine Age	hrs	Client Info		1245	---	---
Oil Age	hrs	Client Info		1245	---	---
Filter Age	hrs	Client Info		0	---	---
Oil Changed		Client Info		N/A	---	---
Filter Changed		Client Info		N/A	---	---
Sample Status				NORMAL	---	---

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>20	0	---	---
Chromium	ppm	ASTM D5185(m)	>20	0	---	---
Nickel	ppm	ASTM D5185(m)	>20	0	---	---
Titanium	ppm	ASTM D5185(m)		0	---	---
Silver	ppm	ASTM D5185(m)		0	---	---
Aluminum	ppm	ASTM D5185(m)	>20	0	---	---
Lead	ppm	ASTM D5185(m)	>20	0	---	---
Copper	ppm	ASTM D5185(m)	>20	<1	---	---
Tin	ppm	ASTM D5185(m)	>20	0	---	---
Vanadium	ppm	ASTM D5185(m)		0	---	---
White Metal	scalar	Visual*	NONE	NONE	---	---
Yellow Metal	scalar	Visual*	NONE	NONE	---	---

CONTAMINATION








The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Silicon	ppm	ASTM D5185(m)	>15	0	---	---
Potassium	ppm	ASTM D5185(m)	>20	<1	---	---
Water		WC Method	>0.05	NEG	---	---
Particles >4µm		ASTM D7647	>5000	857	---	---
Particles >6µm		ASTM D7647	>1300	131	---	---
Particles >14µm		ASTM D7647	>160	15	---	---
Particles >21µm		ASTM D7647	>40	5	---	---
Particles >38µm		ASTM D7647	>10	1	---	---
Particles >71µm		ASTM D7647	>3	0	---	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	17/14/11	---	---
Silt	scalar	Visual*	NONE	NONE	---	---
Debris	scalar	Visual*	NONE	NONE	---	---
Sand/Dirt	scalar	Visual*	NONE	NONE	---	---
Appearance	scalar	Visual*	NORML	NORML	---	---
Odor	scalar	Visual*	NORML	NORML	---	---
Emulsified Water	scalar	Visual*	>0.05	NEG	---	---

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)		<1	---	---
Boron	ppm	ASTM D5185(m)		<1	---	---
Barium	ppm	ASTM D5185(m)		<1	---	---
Molybdenum	ppm	ASTM D5185(m)		0	---	---
Manganese	ppm	ASTM D5185(m)		0	---	---
Magnesium	ppm	ASTM D5185(m)		<1	---	---
Calcium	ppm	ASTM D5185(m)		5	---	---
Phosphorus	ppm	ASTM D5185(m)		59	---	---
Zinc	ppm	ASTM D5185(m)		4	---	---
Sulfur	ppm	ASTM D5185(m)		1146	---	---
Visc @ 40°C	cSt	ASTM D7279(m)		27.8	---	---

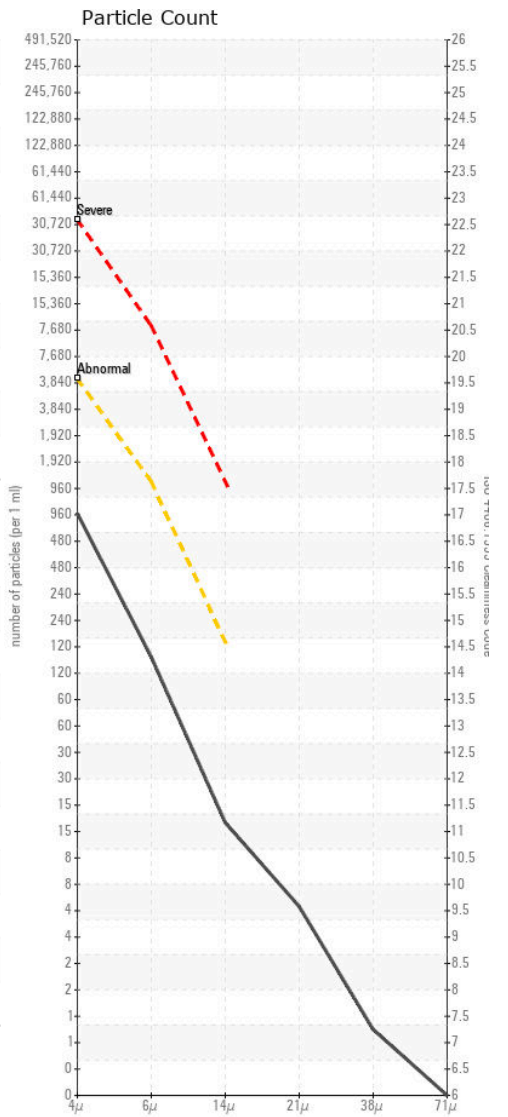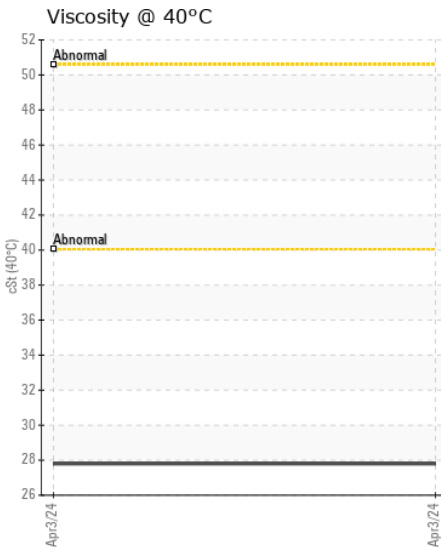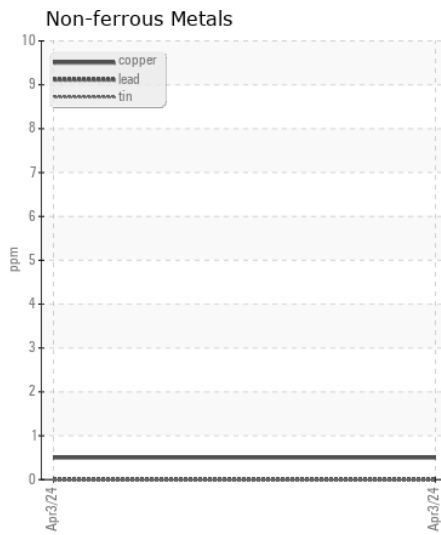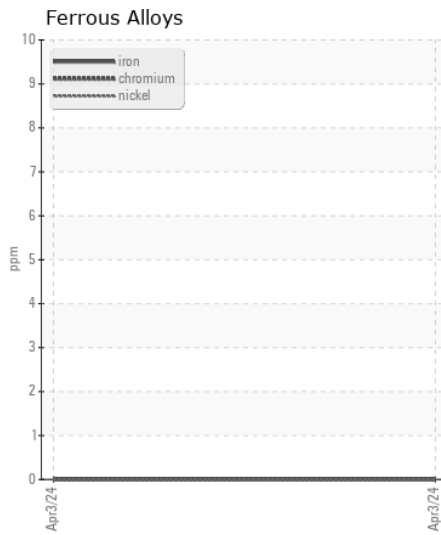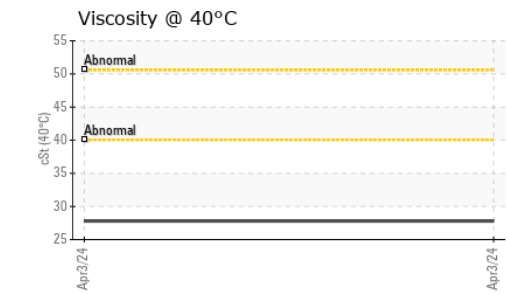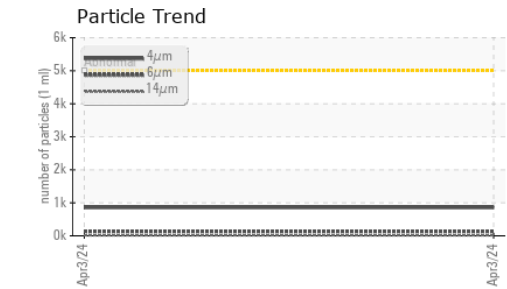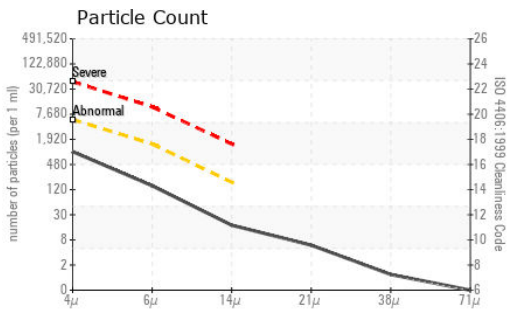

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : WC0922035
Lab Number : 02626684
Unique Number : 5759816
Test Package : MOB 2
Received : 04 Apr 2024
Tested : 05 Apr 2024
Diagnosed : 05 Apr 2024 - Kevin Marson

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

Mount St. Louis Moonstone
 R.R. # 4,, 24 Mount St. Louis Road
 Coldwater, ON
 CA L0K 1E0
 Contact: Andre Huter
 a.huter@mslm.on.ca
 T: (705)835-2112
 F: (705)835-5967