



LIEBHERR

OIL ANALYSIS REPORT

WEAR	NORMAL
CONTAMINATION	NORMAL
FLUID CONDITION	NORMAL



Machine Id
LIEBHERR L556 045906-1484
Component
Splitter Box
Fluid
LIEBHERR GEAR BASIC 90 LS (--- GAL)

RECOMMENDATION

Resample at the next service interval to monitor.

Test	UOM	Method	Limit/Abn	Current	History1	History2
Sample Number		Client Info		LH0287994	LH0250541	LH0238602
Sample Date		Client Info		26 Mar 2024	12 Sep 2023	01 Mar 2023
Machine Age	hrs	Client Info		15268	14240	13207
Oil Age	hrs	Client Info		0	0	0
Filter Age	hrs	Client Info		0	0	0
Oil Changed		Client Info		Changed	Changed	Changed
Filter Changed		Client Info		N/A	N/A	N/A
Sample Status				NORMAL	NORMAL	NORMAL

WEAR

All component wear rates are normal.

Iron	ppm	ASTM D5185(m)	>100	15	12	8
Chromium	ppm	ASTM D5185(m)	>5	0	0	0
Nickel	ppm	ASTM D5185(m)	>5	<1	<1	<1
Titanium	ppm	ASTM D5185(m)		0	0	0
Silver	ppm	ASTM D5185(m)		0	0	0
Aluminum	ppm	ASTM D5185(m)	>20	<1	<1	<1
Lead	ppm	ASTM D5185(m)	>30	0	<1	0
Copper	ppm	ASTM D5185(m)	>20	<1	<1	2
Tin	ppm	ASTM D5185(m)	>10	0	0	0
Vanadium	ppm	ASTM D5185(m)		0	0	0
White Metal	scalar	Visual*	NONE	NONE	NONE	NONE
Yellow Metal	scalar	Visual*	NONE	NONE	NONE	NONE

CONTAMINATION










There is no indication of any contamination in the oil.

Silicon	ppm	ASTM D5185(m)	>30	0	<1	<1
Potassium	ppm	ASTM D5185(m)	>20	<1	1	0
Water		WC Method	>0.1	NEG	NEG	NEG
Silt	scalar	Visual*	NONE	NONE	NONE	NONE
Debris	scalar	Visual*	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	Visual*	NONE	VLITE	NONE	NONE
Appearance	scalar	Visual*	NORML	NORML	NORML	NORML
Odor	scalar	Visual*	NORML	NORML	NORML	NORML
Emulsified Water	scalar	Visual*	>0.1	NEG	NEG	NEG

FLUID CONDITION

The condition of the oil is acceptable for the time in service.

Sodium	ppm	ASTM D5185(m)	>25	3	1	2
Boron	ppm	ASTM D5185(m)	0	2	2	2
Barium	ppm	ASTM D5185(m)	0	0	0	0
Molybdenum	ppm	ASTM D5185(m)	0	0	<1	0
Manganese	ppm	ASTM D5185(m)	0	0	<1	<1
Magnesium	ppm	ASTM D5185(m)	<1	<1	1	<1
Calcium	ppm	ASTM D5185(m)	<1	14	7	8
Phosphorus	ppm	ASTM D5185(m)	2143	2209	2305	2520
Zinc	ppm	ASTM D5185(m)	<1	26	46	56
Sulfur	ppm	ASTM D5185(m)	23468	26335	25422	27283
Visc @ 40°C	cSt	ASTM D7279(m)	170	178	176	178

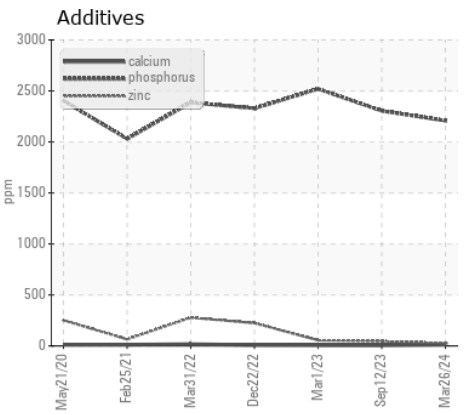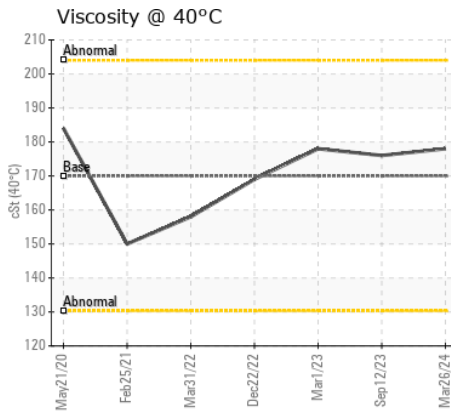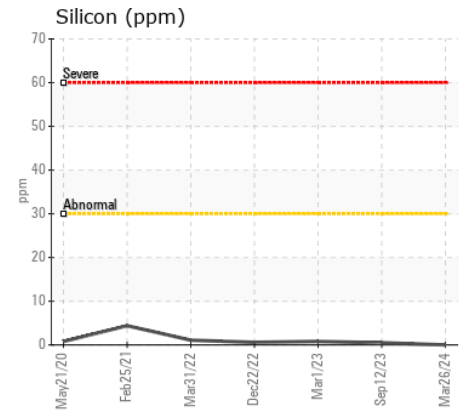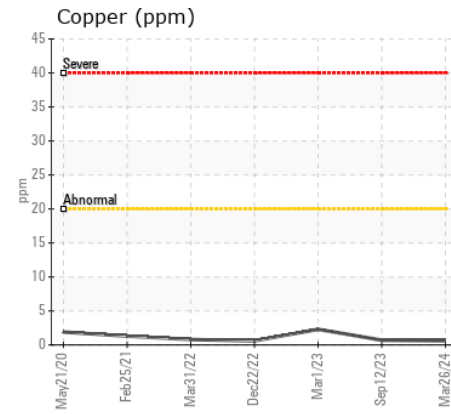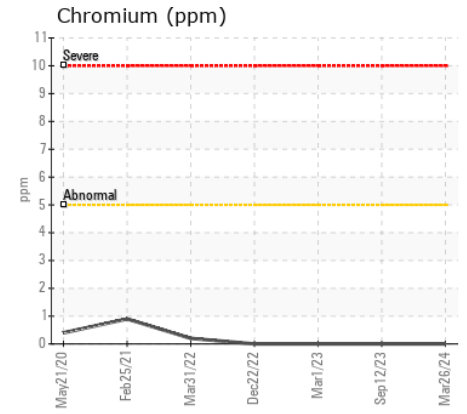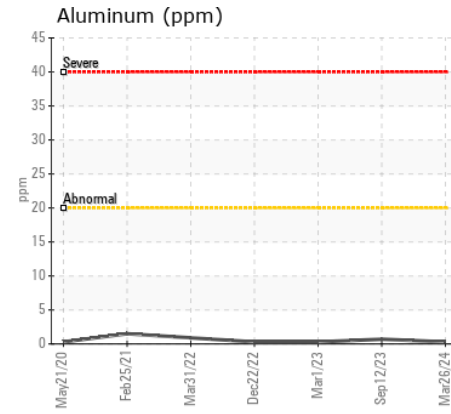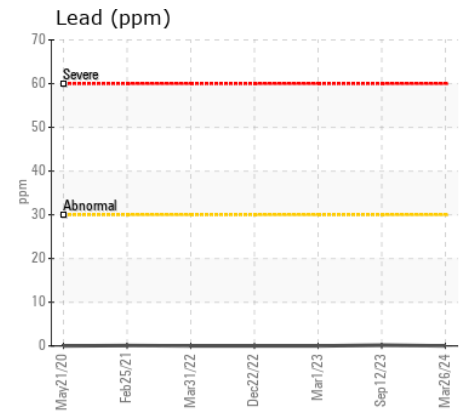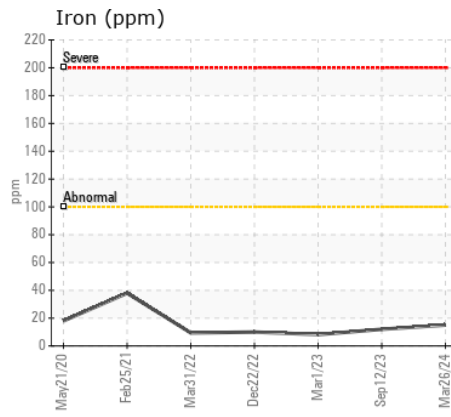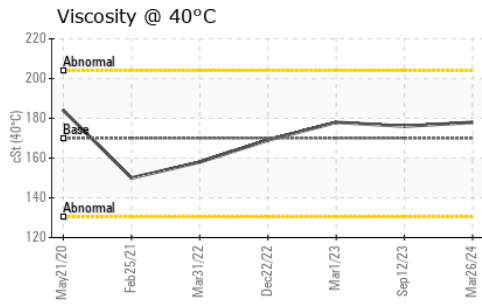

Laboratory : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9
Sample No. : LH0287994
Lab Number : 02626725
Unique Number : 5759857
Test Package : MOB 1
Received : 04 Apr 2024
Tested : 04 Apr 2024
Diagnosed : 04 Apr 2024 - Wes Davis

ECOWASTE INDUSTRIES LTD.
 15111 WILLIAMS ROAD
 RICHMOND, BC
 CA V6W 1G9
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-268-2131.
 Test denoted (*) outside scope of accreditation, (m) method modified, (e) tested at external lab.
 Validity of results and interpretation are based on the sample and information as supplied.

T: (604)277-1410
 F: